

Storage Bench Installation Instruction Manual (43.5 Inch)

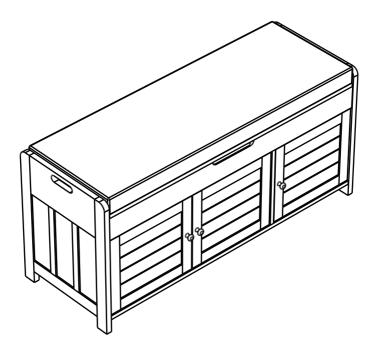


Storage Bench Parts List

-Carefully remove all the parts from the carton and place them ind ividually on a soft cloth to prevent scratches or other damage.

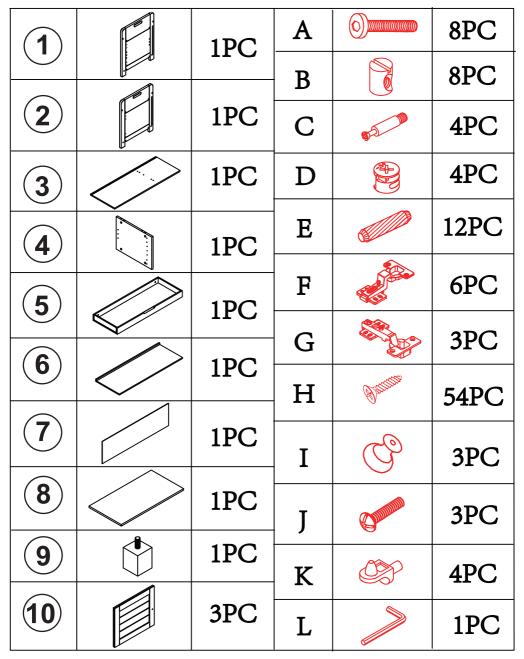


Step 1: (1). First screw the (C) screws and (E) wooden tenons to the (3) board, then align the (4) board holes and insert them, and finally tighten them with the (D) screws.


(2). Place the (7) back plate into the groove in the (3) base plate.

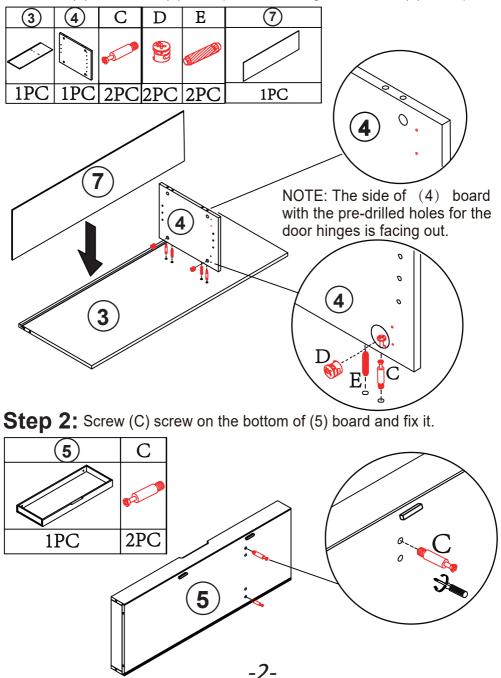

Step 3:Install (E) wooden tenons on (4) plate, then align (5) plate with the holes, and finally tighten (D) screws .

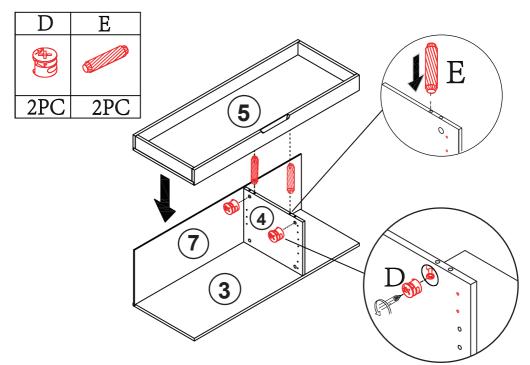


Step 4: Install (9) stool leg to (3) board, and fix and tighten.

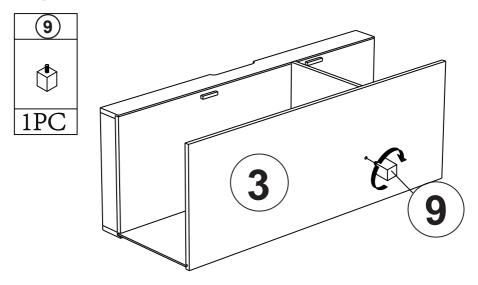


-3-


Step 5 :1.Install (E) wooden tenons to the holes of (5) top plate and (3) bottom plate, then align (2) side plate with wooden tenons and insert, then screw in (B) screws, and finally lock with (A) screws Tight fix. 2.(1) board is completed according to the installation


steps of (2) board.

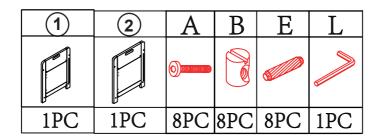


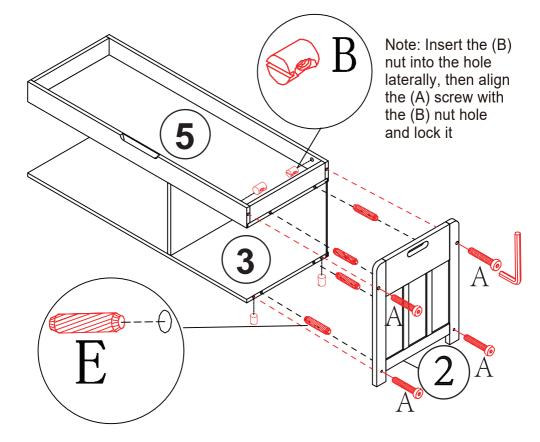


Step 6 : Install (K) shelf nails in the holes at the same level. Note: You can choose the appropriate hole position for installation according to your space requirements.

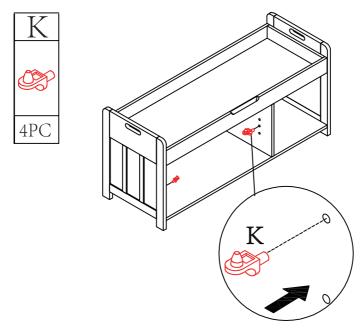




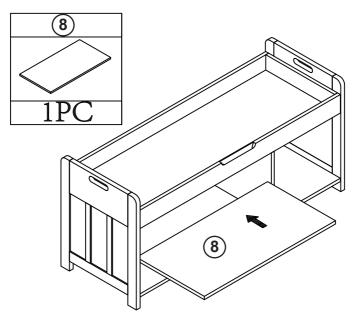

Step 8: Fix the (F) hinges with (H) screws, and then fix the (I) door handle with (J) screws, repeat three times until 3 door panels are installed.

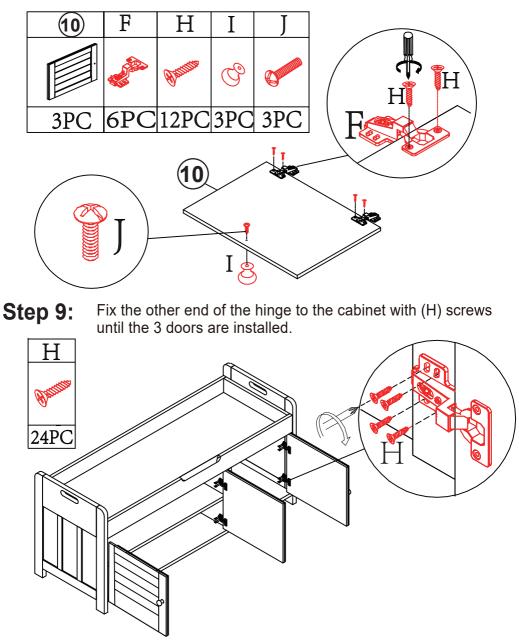


Note: To make the gap even around the door, you can adjust the door by tightening or loosening the two screws on the hinges.




1. Left and right adjustment: When the #1 screw is tightened, the door will move to the left when it is closed, and when it is loosened, it will move to the right.


2. Front and rear adjustment: First loosen the #1 screw, then loosen the #2 screw, adjust the distance you need, and then tighten the #2 screw.

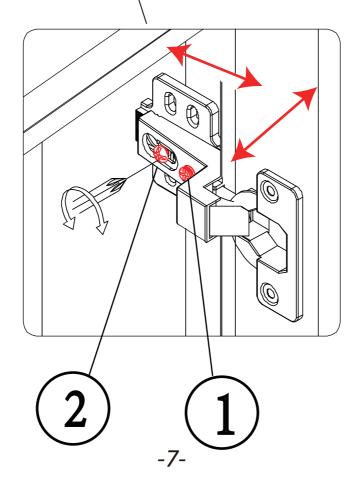

Step 10: Use (H) screws to fix the (G) hinge on the (6) board according to the pre-drilled holes

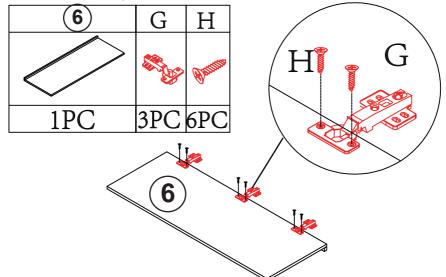

Step 11:Use (H) screws to fix the other end of the (G) hinge to the plate (5) according to the pre-drilled holes.

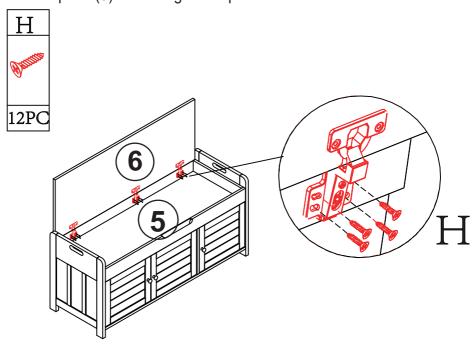

AFTER-SALES SERVICE CARD

We sincerely thank you for trusting our service and our products, and may this product add enrichment to your home. We guarantee that the product has undergone strict quality inspection and meticulous packaging. If you encounter any issue regarding either shipping or the product, please feel free to contact us at any time. We'd be more than happy to serve you wholeheartedly.

- •This manual contains important information and keep it properly.
- Please avoid harsh, corrosive and abrasive cleaners.
- Keep dry and avoid damp environments.