


Features

- *ExoCrylic™*
- *Blower motor with 300 W heater, and electronic user control*
- *Blower motor is supplied with a grounding-type plug-in cord*
- *120 BubbleMassage™ airjets*
- *Slotted overflow for maximum bathing depth*
- *Low threshold height*
- *Integral lumbar support*
- *Drop-in [-G] or 3-side integral flange [-GLF, -GRF]*
- *60" (1524 mm) x 30" (762 mm) x 19" (483 mm)*

5' BUBBLEMASSAGE™ BATH K-1947-G ALSO K-1947-GLF, K-1947-GRF

ADA

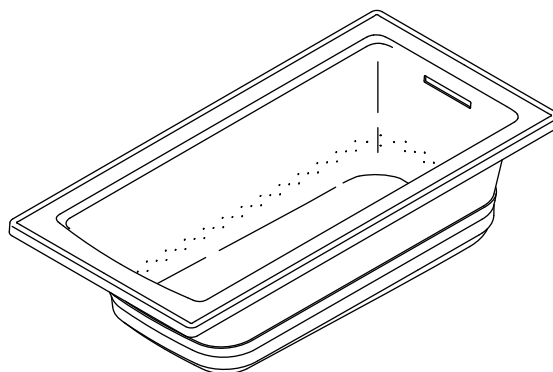

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B45.5/IAPMO Z124
- CSA C22.2 No 218.2
- ASME A112.19.7/CSA B45.10
- UL 1795
- NMJ-J-521

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1947-G	5' BubbleMassage bath – drop-in (shown)	☐ 0	☐ Other _____
K-1947-GLF	5' BubbleMassage bath – 3-side integral flange, left drain	☐ 0	☐ Other _____
K-1947-GRF	5' BubbleMassage bath – 3-side integral flange, right drain	☐ 0	☐ Other _____

Required Accessories

K-7271	Clearflo slotted overflow brass bath drain OR	☐ CP	☐ Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	☐ CP	☐ Other _____

Recommended Accessories

K-1446	Remote blower/motor installation kit	NA	
--------	--------------------------------------	----	--

Product Specification

The ExoCrylic bath shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height. Bath shall have a blower motor with 300 W heater, and an electronic user control. The blower motor shall have a grounding-type plug-in cord. Bath shall have 120 BubbleMassage airjets. Bath shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath shall be for drop-in [-G] or 3-side integral flange [-GLF, -GRF]. Bath shall be Kohler Model K-1947-_____-_____.

ARCHER®

Technical Information

Fixture*:					
Bathing well:					
Basin area, bottom		45-1/8" (1146 mm) x 19-11/16" (500 mm)			
Basin area, top		52-1/8" (1324 mm) x 22-1/16" (560 mm)			
Weight		98 lbs (44.5 kg)			
To overflow:					
Water depth		15-1/8" (384 mm)			
Capacity		57 gal (216.9 L)			
* Approximate measurements for comparison only.					
Drop-in cutout		58-1/2" (1486 mm) x 28-1/2" (724 mm)			
Blower motor:		Heater	V	Hz	A
		300 W	120	60	10

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Blower motor: 120 V, 15 A, 60 Hz

Locate the outlet behind the bath and within 24" (610 mm) of the blower motor.


Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 48 lbs/square foot (234 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

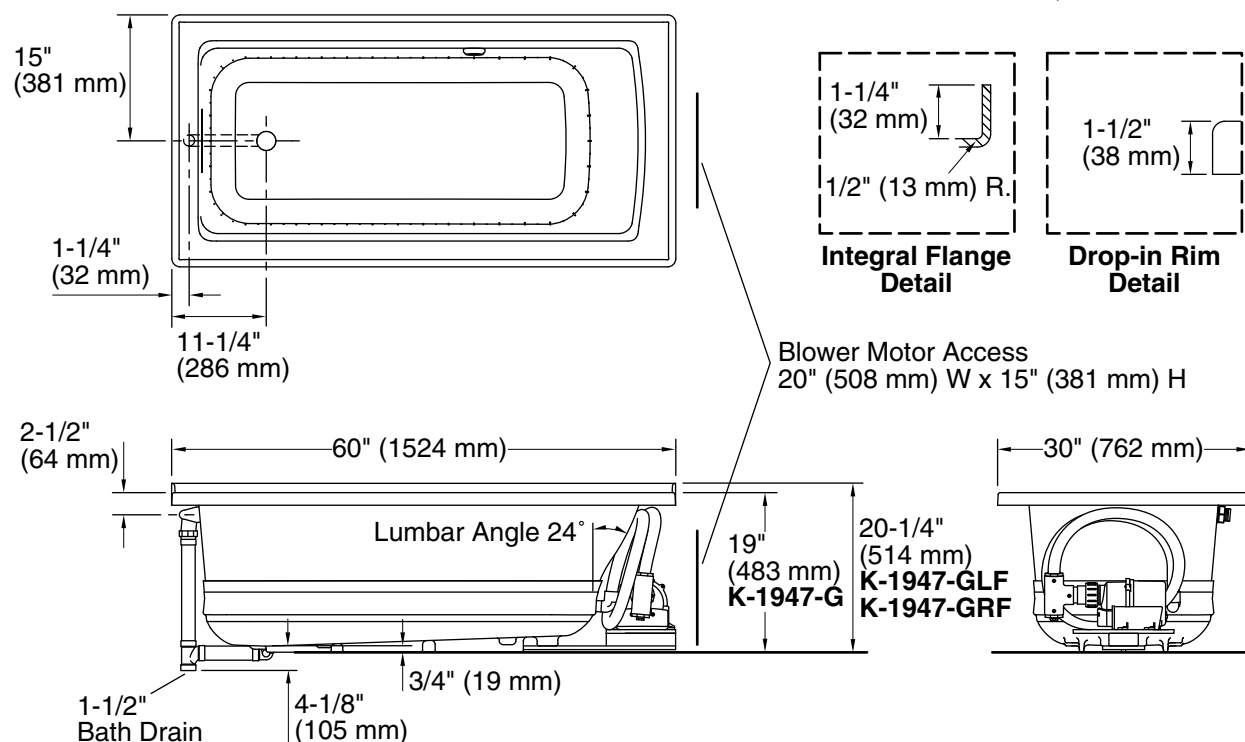

Product Diagram