

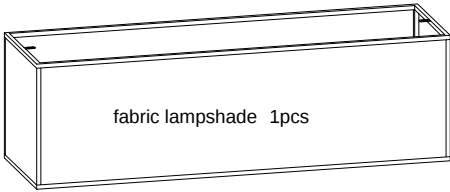



①	 fabric lampshade 1pcs	④ threaded rod 2pcs ⑤ screw 2pcs ⑥ hanging tube 2pcs	⑧ hanging tube 6pcs	⑪ canopy 1pcs ⑫ cap nut 2pcs	 X 1PCS  X 1PCS  X 3PCS
②	② screw 2pcs  ③ metal frame 1pcs	⑦ light fixture 1pcs 	⑨ carabiner hook screw connection 2pcs ⑩ hanging tube 2pcs	⑮ cylinder tube 7pcs	 X 3PCS  X 3PCS  X 3PCS




1. Let the wire of the fixture ⑦ go through the hanging tube ⑥, rotate to fix the tube ⑥ to the fixture.
2. Loosen and remove out the threaded rod ④ from tube ⑥, let the wire go through the metal frame ③ and threaded rod ④, rotate rod ④ to install the frame ③ to the fixture.

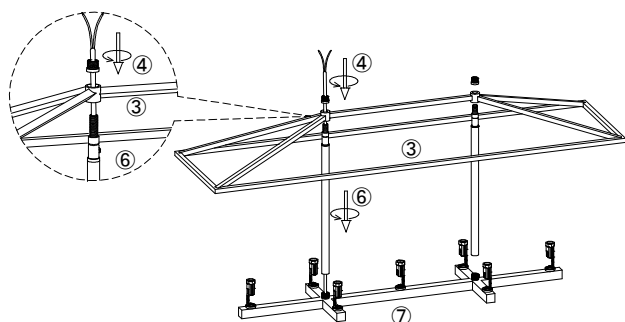


Please operate with gloves to avoid leaving stains on the lampshade.

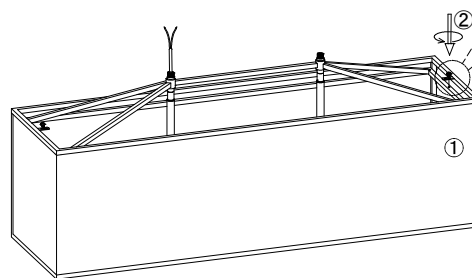


3. Put the lampshade ① on the frame ③, install the frame ③ to the fixture with screw ②, don't tighten the screws ② until all screws are ready in the hold of frame ③, rotate to fasten the screws ② at last.

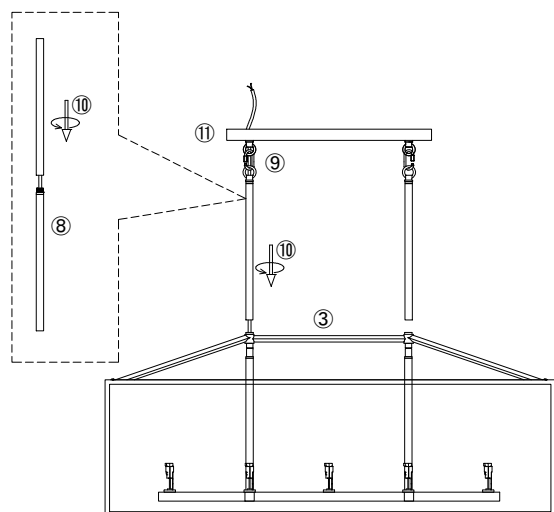

4. Let the wire go through the hanging tube ⑩, rotate to fix the tube ⑩ to the fixture, hang the fixture to the canopy ⑪ with carabiner hook screw connection ⑨, let the wire go through the ring ⑨ and canopy ⑪. (can connect more tubes to get suitable height you need)



Loosen screw ⑤ to adjust tube ⑥ straight, after that rotate screw to make it fasten.

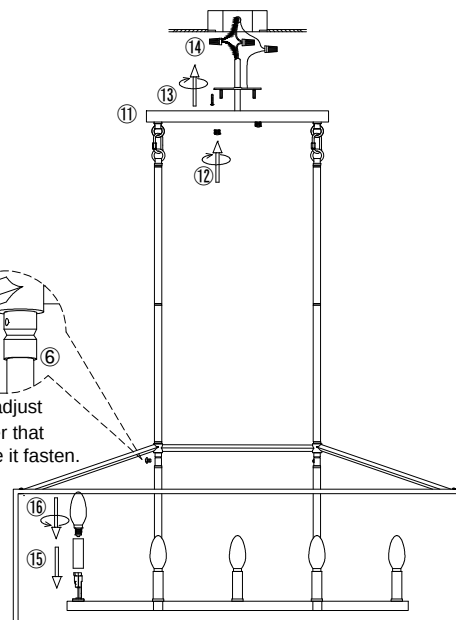

5. Install the bracket to the ceiling junction box with screw ⑬.
6. Connect the wire to the home line with cap connector ⑭.
7. Install the fixture to the bracket with cap nut ⑫.
8. Put the cylinder tube ⑮ on top of bulb holder and install the bulb ⑯.

D9073L-7

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !