

WARNING

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
 To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
 Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this luminaire cannot be replaced
 If the cord is damaged, the luminaire shall be destroyed

Product Dimensions: Ø23"*H17.5"

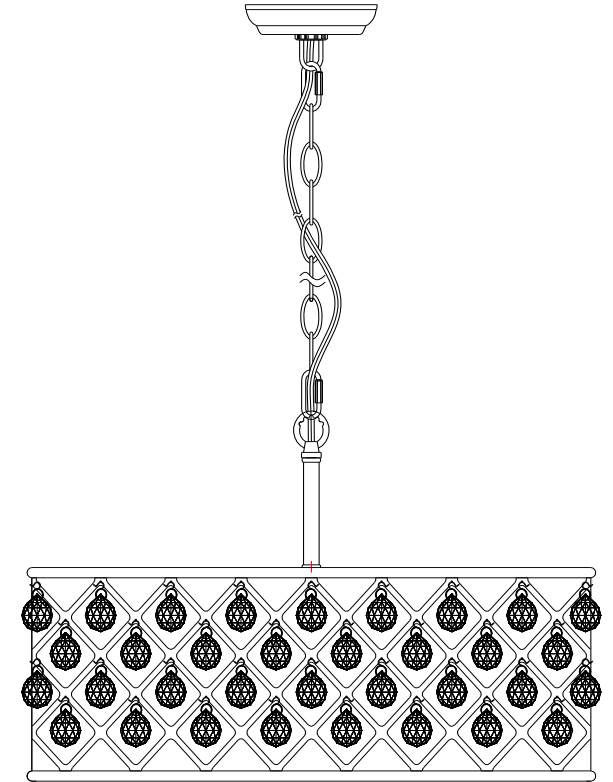

Part List and Hardware List


| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|----------------|---------|----------|-------|--------------------|---------|----------|-------|--------------|---------|----------|
| A | Mounting Plate | | 1X | F | Closable link/ cap | | 2X | K | Cover | | 1X |
| B | Canopy | | 1X | G | Fixture Loop | | 1X | L | Tube | | 1X |
| C | Hanging Loop | | 1X | H | Mounting Screw | | 2X | M | Body Frame | | 1X |
| D | Canopy Nut | | 1X | I | Ground Screw | | 1X | N | Bulb | | 4X |
| E | Chain | | 1X | J | Wire Nut | | 3X | O | Crystal Drop | | 100X+1X |

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.
Estimated Assembly Time: 30 minutes.

1. Insert the fixture wires through the Tube(L), Cover(K), Fixture Loop(G) and turn the Fixture Loop(G) clockwise till tight. Then through Chain(E) and Canopy(B).
2. Screw the Chain(E) to the Hanging Loop(C) and the Fixture Loop(G) with Closable link/cap(F).
3. Separate the Mounting Plate(A) from the Canopy(B) by turning the Canopy Nut(D) anti-clockwise.
4. Make wire connections, with wire nut(J), following the reference chart listed below.

| Connect, Hot, Black or Red Outlet Supply Wire to: | Connect, Neutral, White Outlet Supply Wire to: |
|--|---|
| Black | White |
| * Parallel Cord (round & smooth) | * Parallel Cord (square & ridged) |
| Clear, Brown, Gold or Black without Tracer stripes (colored stripes) | Clear, Brown, Gold or Black with Tracer (colored stripes) |
| Insulated Wire (not green) with copper metal conductor | Insulated Wire (not green) with Silver metal conductor. |




*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

5. Fix the Mounting Plate(A) to the junction box with Mounting Screw (H).
6. Attach the Canopy(B) to the junction box and fix it by turning the Canopy Nut (D) clockwise.
7. Insert the Crystal Drop(O) into the Body Frame(M) as diagram.
8. Insert the bulbs (N) into the Sockets. Be sure to use light bulbs(N) with wattage no greater than specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

**PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT
THERE ARE 4 X 4W LED BULBS IN THE BOX.**

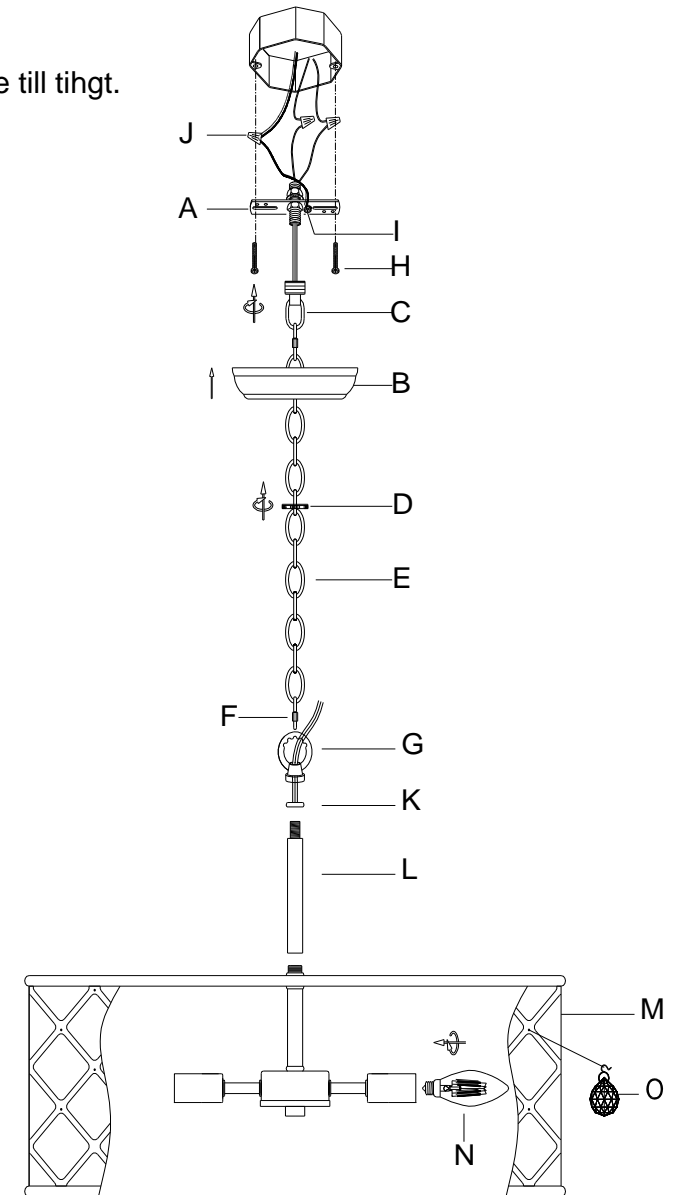

ENJOY YOUR LAMP