


FENRIC ACRYLIC WALL SCONCE

DESIGN # CTL1110

Assembly Instructions

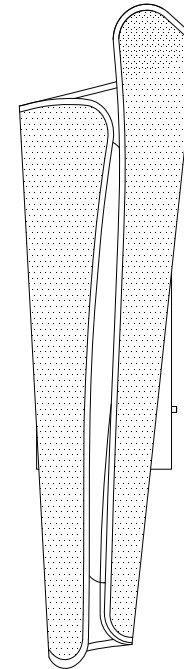

Need help?

Feel free to contact us via email or call
if you have any specific questions!

contact us:

cs@safavieh.com

866-422-9070

SAFAVIEH
C O U T U R E

Thanks for bringing Safavieh Couture into your home

Every thing we make is incredibly simple to set up, including your new wall lamp. Tools Required for Assembly (not included): Screwdriver, Junction box

Parts List


Ax3

Wire Nut



Bx1

Mounting bracket




Cx2

Outlet box screw



Dx1

Fixture body

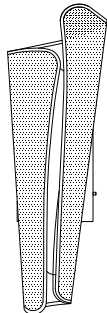


Ex2

Mounting screw



1

Attach the mounting bracket (B) to the junction box with outlet box screw (C)

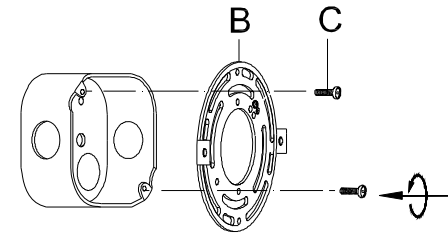



2 Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth and with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections! Make sure they are inserted properly.

Grounding Instructions:

Wrap the ground wire from the outlet box around the green ground screw on the mounting bracket no less than 2" from the end of the wire. Tighten the ground screw. If the fixture is supplied with a ground wire, connect it to the outlet ground wire with a wire nut.

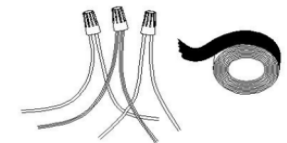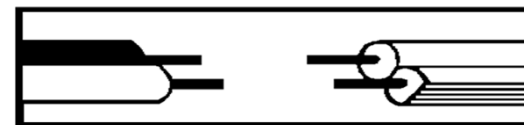


Thanks for bringing
Safavieh Couture into
your home

Every thing we make is incredibly
simple to set up, including your new
wall lamp. Tools Required for Assembly (not
included): Screwdriver, Junction box

Dimmable drive can be compatible with the following 10 commonly used dimmers in the United States:	
Lutron DVCL-153P	Lutron MACL-153MLH-WH
Lutron P-PKG1W-WH-R	Lutron STCL-153PH-WH
Leviton R11-DSL06-1TW	Leviton R00-RNL06-0TW
Leviton R02-DW6HD-2RW	Leviton R68-06674-POT
Legrand RHCL453PNICCV4	TP-link HS220

3

Attach the fixture body (D) to the mounting plate(B) with mounting screw(E).

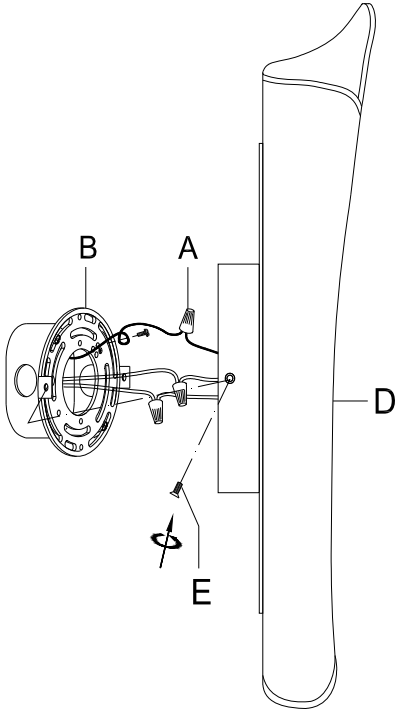

4

Select your favorite color temperature (CCT) from three options: 3000K, 4000K, or 5000K by the slide switch located on the side of the box.

