
# INSTALLATION INSTRUCTIONS

# LIGHTED MEDICINE CABINET

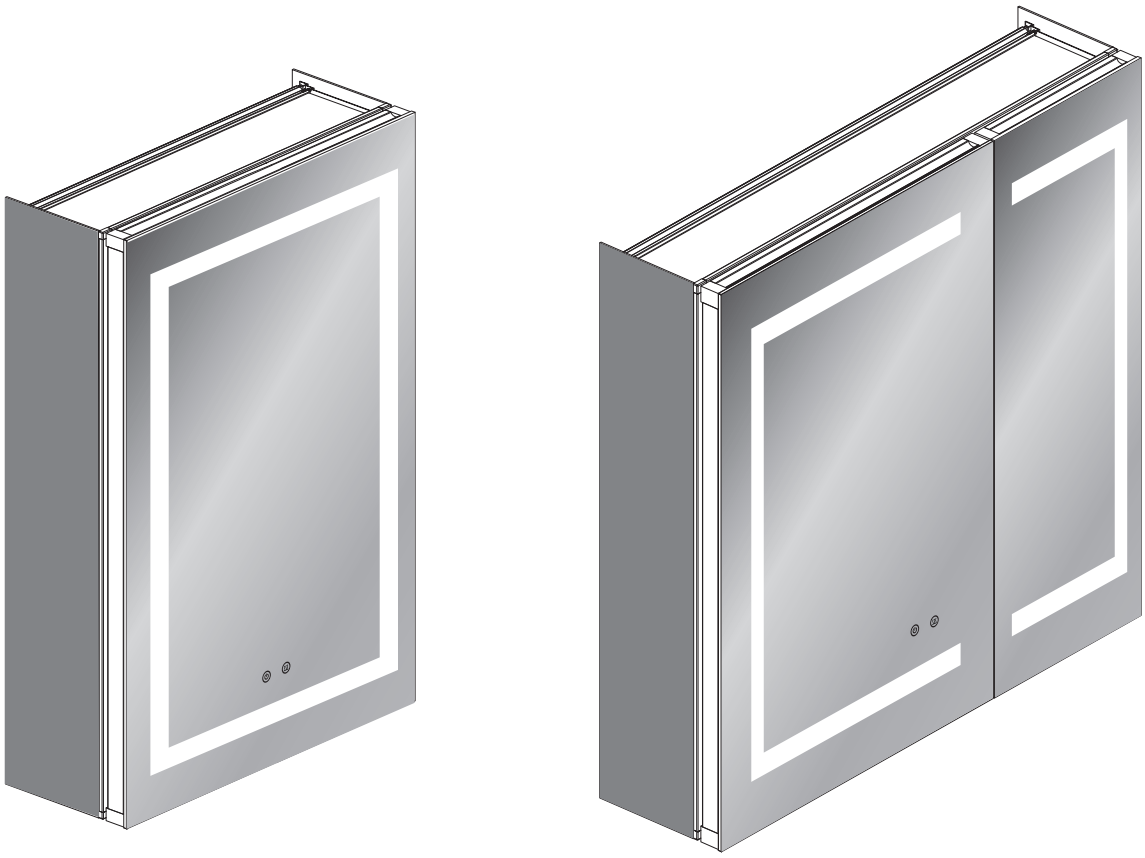

**Installation Recommendation:**
We recommend hiring a professional electrician for the installation.

## Thank you for choosing us

Need help? Scan to reach us for step-by-step videos, guides and support.

Phone: 1-844-465-0168(8 AM - 5 PM PST from Mon - Fri)

Email: After-sale-service-QA@outlook.com (Response within 24 hours)

# IMPORTANT SAFETY INSTRUCTIONS


**When using an electrical furnishing, basic precautions should always be followed, including the following:**

**Read all instructions before using (this furnishing).**

**DANGER – To reduce the risk of electric shock:**

1. **Always unplug this furnishing from the electrical outlet before cleaning or servicing.**
   **WARNING – To reduce the risk of burns, fire, electric shock, or injury to persons:**
2. **Unplug from outlet before putting on or taking off parts.**
3. **Close supervision is necessary when this furnishing is used by, or near children, invalids, or disabled persons.**
4. **Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.**
5. **Never operate this furnishing if it has a damaged cord or pplug, if it is not working properly, if it has been dropped or damaged, or dropped irnto water.**
   **Please scan the QR code on the homepage to contact us for more services.**
6. **Keep the cord away from heated surfaces.**
7. **Never operate the furnishing with the air openings blocked. Keep the air openings free of lint, hair, and the like.**
8. **Never drop or insert any object into any opening.**
9. **Do not use outdoors.**
10. **Do not operate where aerosol (spray) products are being used or where oxygen is being administered.**
11. **To disconnect, turn all controls to the off position, then remove plug from outlet.**
12. **For grounded products the following st tement:**
    **"WARNING: Risk of Electric Shock – Connect this furnishing to a properly grounded outlet only. See Grounding Instructions."This product is for use on a nominal 120-volt circuit and has a grounding plug that looks like the plug illustrated as below, Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product.**

**Upon initial power-up,**
**the cabinet door sensor switch must be opened and closed once before normal operation.**

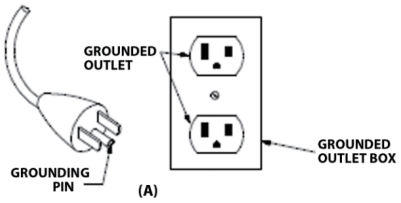


13. **Mount furnishings at the correct height.**
14. **Mount only approved work surfaces and secondary surfaces (shelves) in accordance with instructions.**

**Failure to do so may cause instability, collapse, or failure of electrical components.**
**[Applicable to furnishings that are not provided with a work surface and/or secondary surfaces (shelves)].**

# SAVE THESE INSTRUCTIONS

“SUITABLE FOR DAMP LOCATIONS [CONVIENTAUX EMPLACEMENTS HUMIDES]
For Household / Residential Use Only [POUR L'USAGE MÉNAGER / RÉSIDENTIEL SEULEMENT]”

# ALL SIZE FOR YOUR CHOICE!

| SKU / UL SKU | SIZE | HORIZONTALLY | POWER PLUG | DIMMING | THREE TEMPERATURE | ANTI-FOG | WALL SWITCH CONTROL | LIGHT MEMORY | Recessed& urface Mounted | BOTTEN NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| LMC-1-2026 | 20*26 Left Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2028 | 20*28 Left Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2028R | 20*28 Right Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2030 | 20*30 Left Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2030R | 20*30 Right Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2430 | 24*30 Left Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-2430R | 24*30 Right Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-3624 | 36*24 Double Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |
| LMC-1-3630 | 36*30 Double Door | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 2 |

# WARNING AND SAFETY INSTRUCTIONS

Before assembling your LED Lighted Mirror fixture, please make sure that you carefullyread through this instruction sheet, refer back to them during installation to ensureyour product is fitted safely and correctly. Keep these instructions forfuture use.

## WARNING Risk of Fire and ElectricShock

- All fittings must be installed in accordance with current IEE wiring regulations. If indoubt, consult a qualified electrician.
- Switch off the electrical supply at the main circuit board BEFORE installationand maintenance.
- Suitable for indoor use only. This product should be positioned well awayfromcurtains and fabrics. Never cover the mirror.
- Regularly check the cord, the transformer and all other parts for damage. If anypart is damaged the product should not beused.

# INSTALLATION SAFETY


- Inspect the product immediately upon receipt for the transit damage ormissingparts. Handle the product with care and protect against knocks to all sides andedges of the glass.
- Ensure there are no hidden pipes or cables in the wall before drilling.
- Wear suitable eye protection when drilling. Takecare if drilling ontiled surfacesin case the drill slips.

## ⚠ ACAUTION

The light source of this product is non-changeable light diodes (LED). Do notdisassemble the product, as the light diodes can cause damage to the eyes.


**NOTE:** The important safeguards and instructions that appear in this manual are notmeant to cover all possible conditions and situations that may occur: It must beunderstood that common sense, caution and care, are factors that can't be built intoany product. These factors must be supplied by the person(s) caring for and operatingthe fixture. Do not install this fixture in hazardous locations.

# HARDWARE AND TOOLS




**Bottom mounting bracket**

QTY: 1-2 (PCS)




**Hardware screw**

QTY: 4-10 (PCS)




**Glass side panel**

QTY: 2 (PCS)




**Glass Shelf**

QTY: 2-4 (PCS)




**Shelf support bracket**

QTY: 6 -10 (PCS)



**Wall Plug**


QTY: 4-10 (PCS)




**Side Panel Fixing Screw**

QTY: 4 (PCS)


# TOOLS YOU MAY NEED

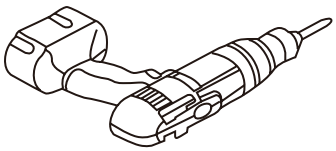

Electric Drill




1/8" Drill Bit

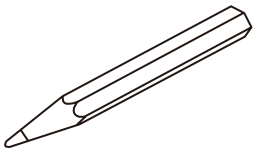


Pencil or Marker




Toothless flat nose plier





Silicone




Tape Measure



Screw Driver

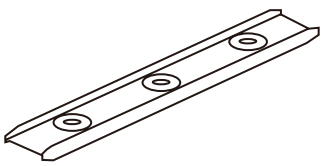


Lever




Wire terminal plate

# PRIOR TO MOUNTING

1

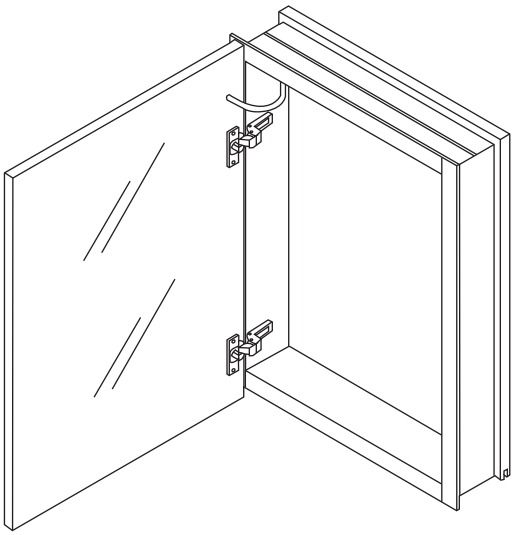


2

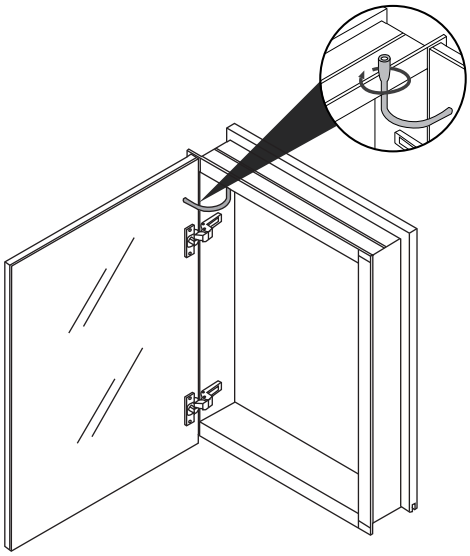

**It is not necessary to remove the door, if the size is large,you can choose to remove doors for easy mounting**


Remove door(s) prior to mounting your cabinet. Start with unplugging the door from the cabinet.

3

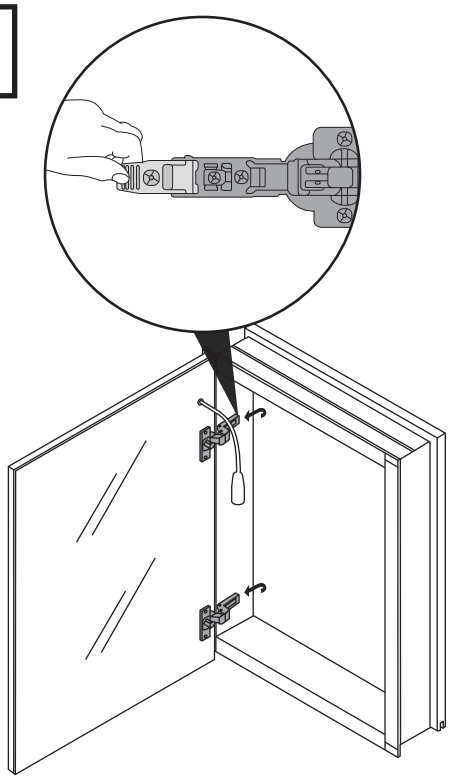

While supporting the door release(the lever under the hinge arm),slide the door off the frame.

4

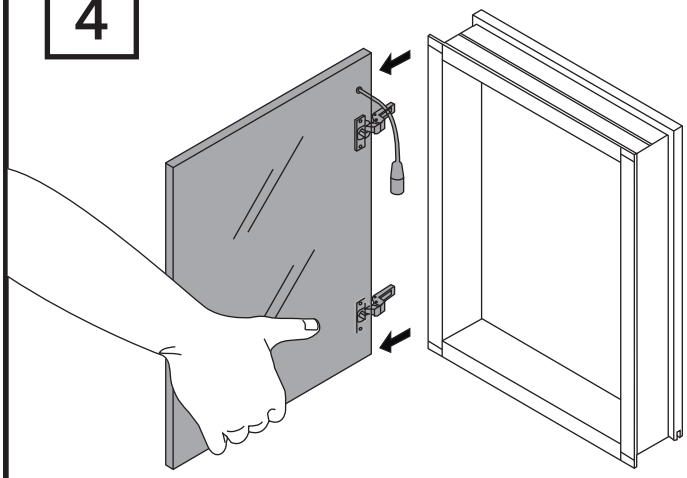


Take off the door(s) carefully and lay it down on a safe area.

**Note:**

The steps for removing the mirror door are the same as for installing it.


# RECESS MOUNT INSTALLATION CONTINUED

1

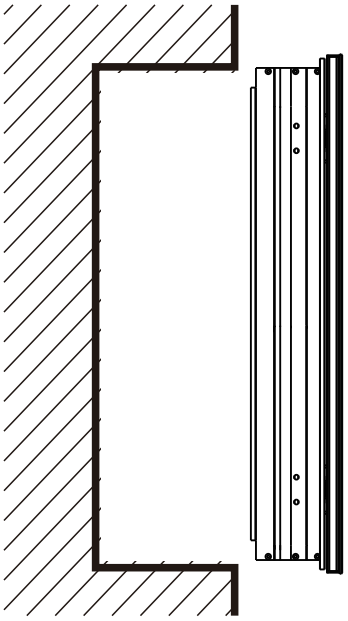


Frame the opening for the cabinet based on the measurements.

2

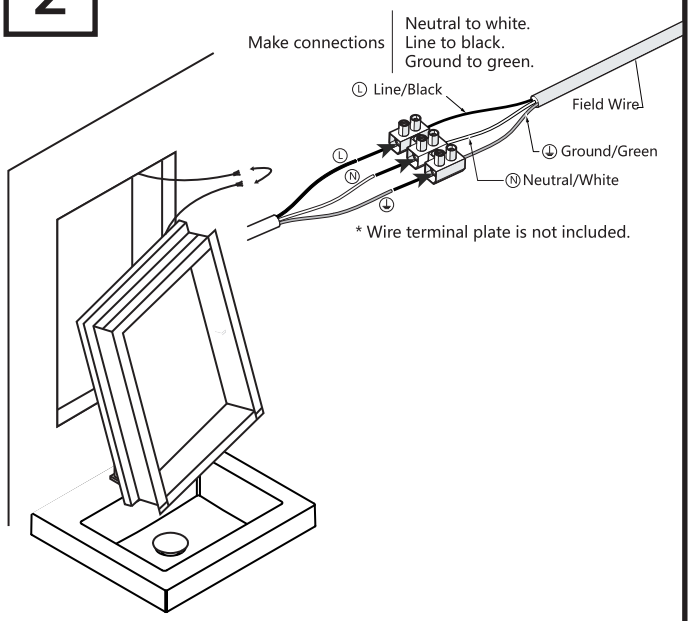



Connect electrical wires before inserting the cabinet into the opening.

3

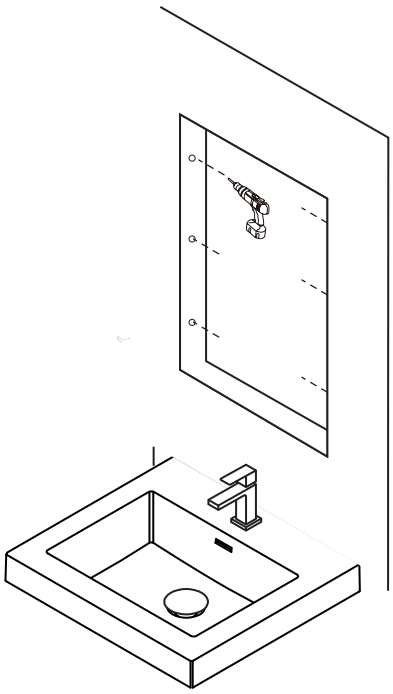


Drill 6 corresponding holes in the wall.

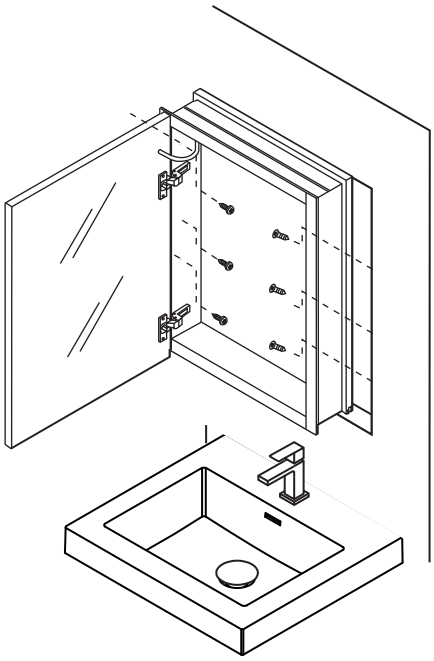


Place the mirror cabinet into the groove and screw it onto the corresponding inner wall hole to secure it.

# SURFACE MOUNT INSTALLATION


1



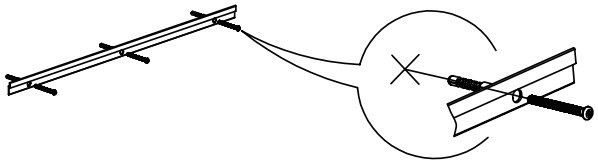



Measure the distance between the 2 marks.
Level&mark the drilling holes on the wall.
Put the aluminum bracket aside.


2

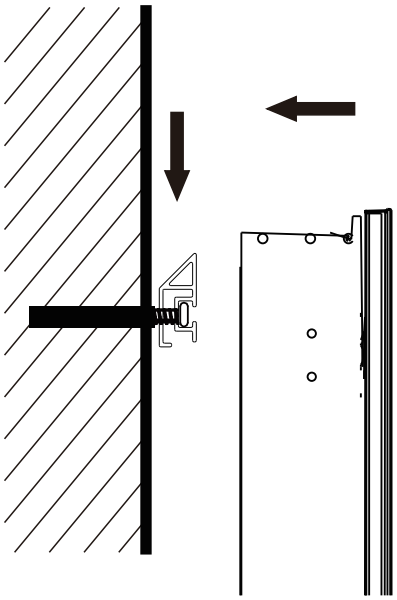

3

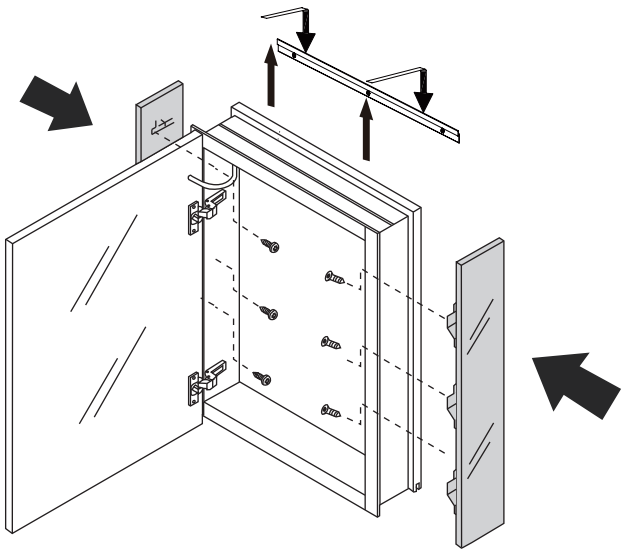

Pick up the mirror cabinet with two people.Place the cabinet against the wall&slide down the mirror so the aluminum bracket safely gets inside the cabinet's top frame.

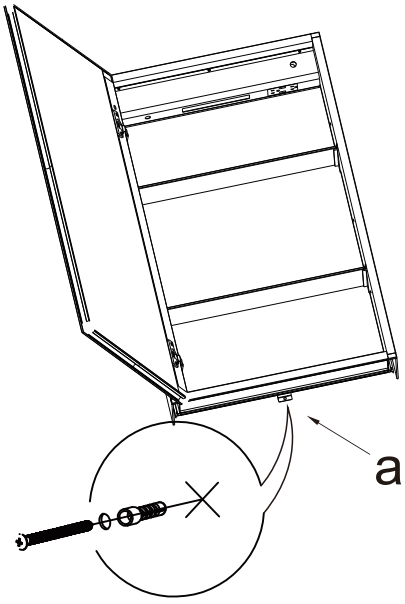


Drilling the screws into this bracket to hold on the cabinet on the wall.


---

Use the built-on plug to connect to power directly.
When the Plug is connected to the power supply,the ON/OFF button Lights blue and the power is on.




# FINAL ASSEMBLY

1.Insert clear snap in shelf clips into holes on the sides of the cabinet cabinet.

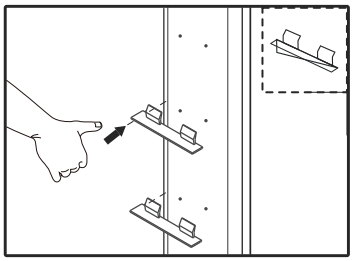


①

Align the support bracket with the pre-drilled holes inside the mirror cabinet to install the stabilizing bracket.

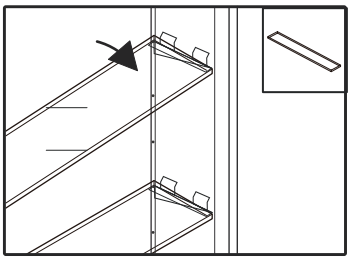


②

Once the support bracket is fixed, place the glass shelf onto the bracket.

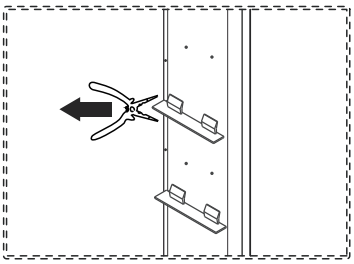

③


You can use pliers to remove the support bracket.

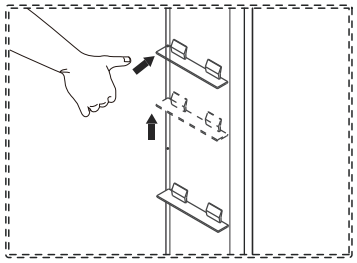


④

The support bracket can be adjusted freely according to the pre-drilled holes inside.

# OPTIONAL DOOR ADJUSTMENT

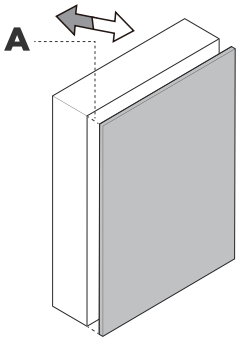


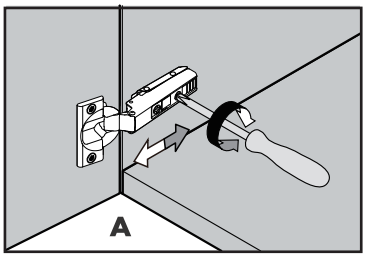




### Adjusting the Mirror Door Extension Distance (Inward/Outward)

1. Rotate the screwdriver inward to move the mirror door inward.
2. Rotate the screwdriver outward to move the mirror door outward.
   Counting from outside to inside, rotate the third screw:

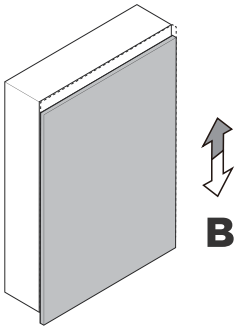The steps are the same, only distinguishing between turning the screwdriver left or right.

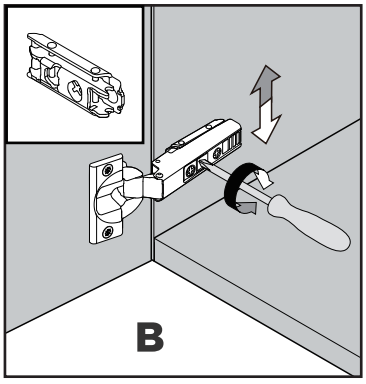







### Adjusting the Mirror Door Vertical Distance (Up/Down)

1. Rotate the screwdriver inward to move the mirror door upward.
2. Rotate the screwdriver outward to move the mirror door downward.
   Counting from outside to inside, rotate the second screw:

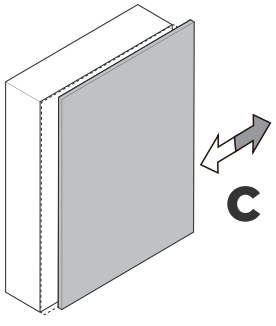The steps are the same, only distinguishing between turning the screwdriver left or right.

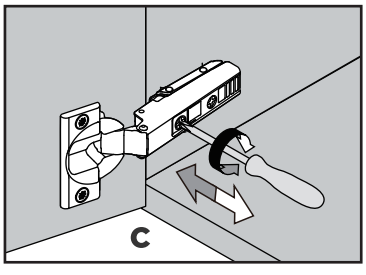






### Adjusting the Mirror Door Horizontal Distance (Left/Right)

1. Rotate the screwdriver inward to move the mirror door to the left.
2. Rotate the screwdriver outward to move the mirror door to the right.
   Counting from outside to inside, rotate the first screw:

The steps are the same, only distinguishing between turning the screwdriver left or right.
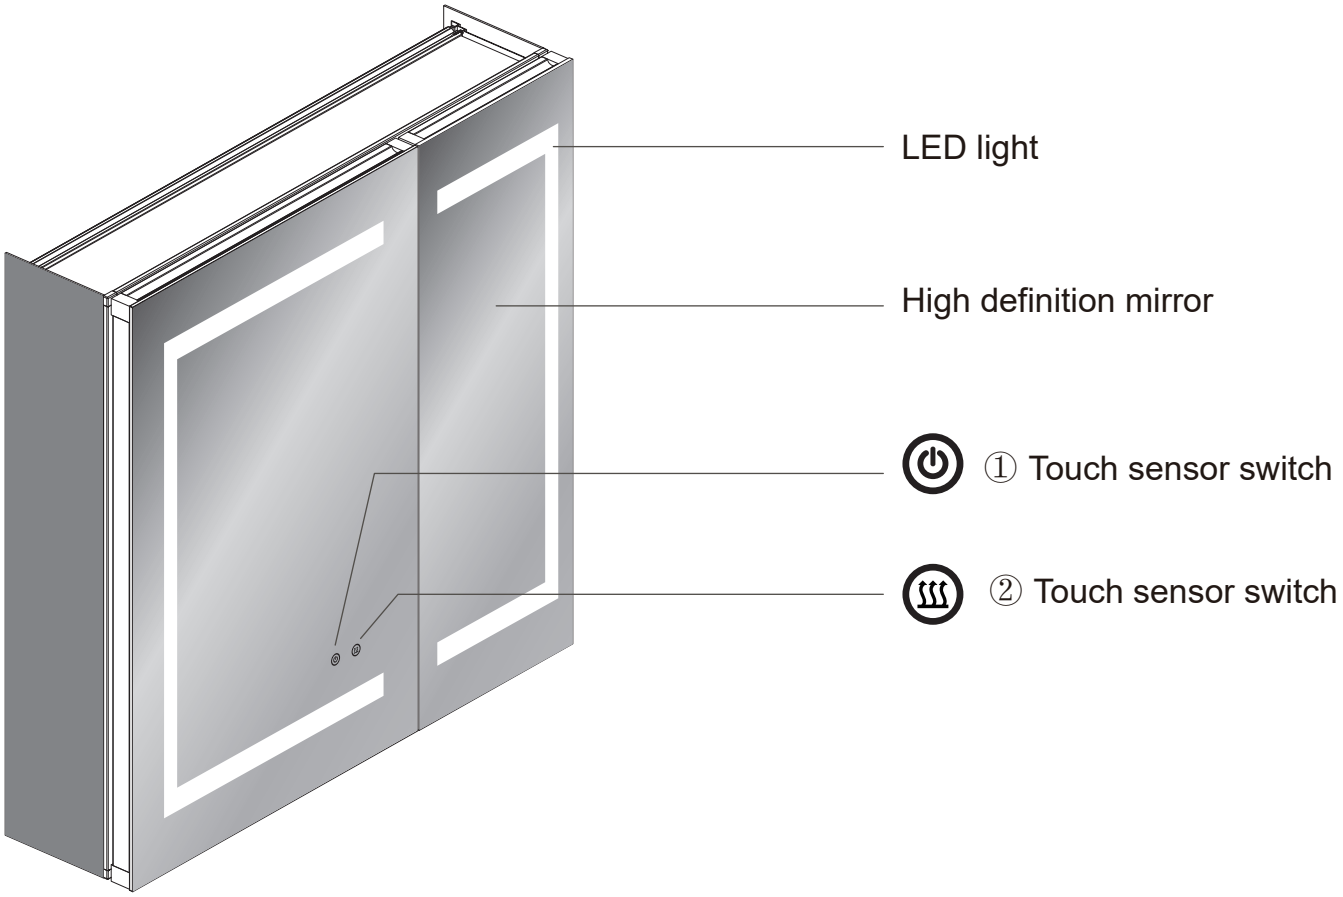
# ILLUSTRATE




**Touch Switch 1 Functions**:

1. After power is applied, the indicator light turns blue, controlling the LED output.
2. Short press once, the indicator light turns white, and the LED light turns white (6500K), press again for warm light (3000K), and press again for natural light (4500K).
3. Short press again to turn off the LED (when the LED is off, the indicator light turns blue).
4. When the LED light is on, long press for stepless dimming (from brightest to dimmest in 2.5 seconds, no flicker during dimming).
5. It has a power-off memory function (remembers the brightness and color of the light when turned off and restores them when turned back on).

**Touch Switch 2 Functions**:

1. Controls the anti-fog function. Touch once to turn on the anti-fog function (indicator light turns white).
2. Touch again to turn off the anti-fog function (indicator light turns blue).

## Thank you for choosing us

Need help? Scan to reach us for step-by-step videos, guides and support.

Phone: 1-844-465-0168(8 AM - 5 PM PST from Mon - Fri)

Email: After-sale-service-QA@outlook.com (Response within 24 hours)