
MODLE: GT23008




Missing parts, damages, and any other problems, please contact us via email.

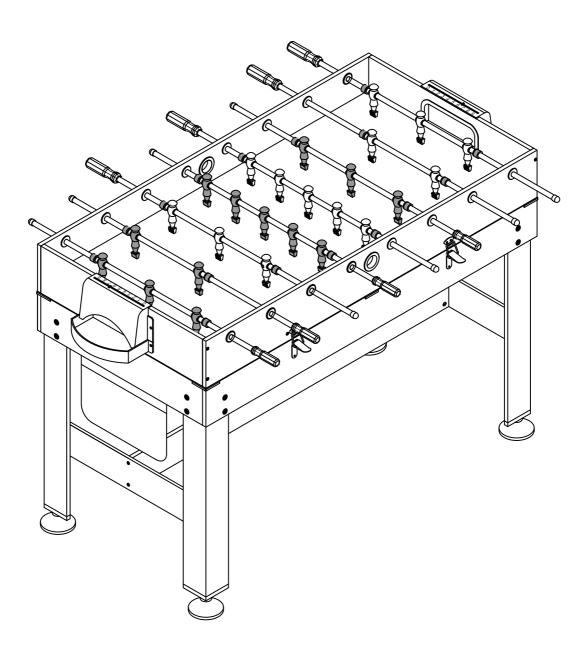


ENGLISH

GT23008 PARTS LIST

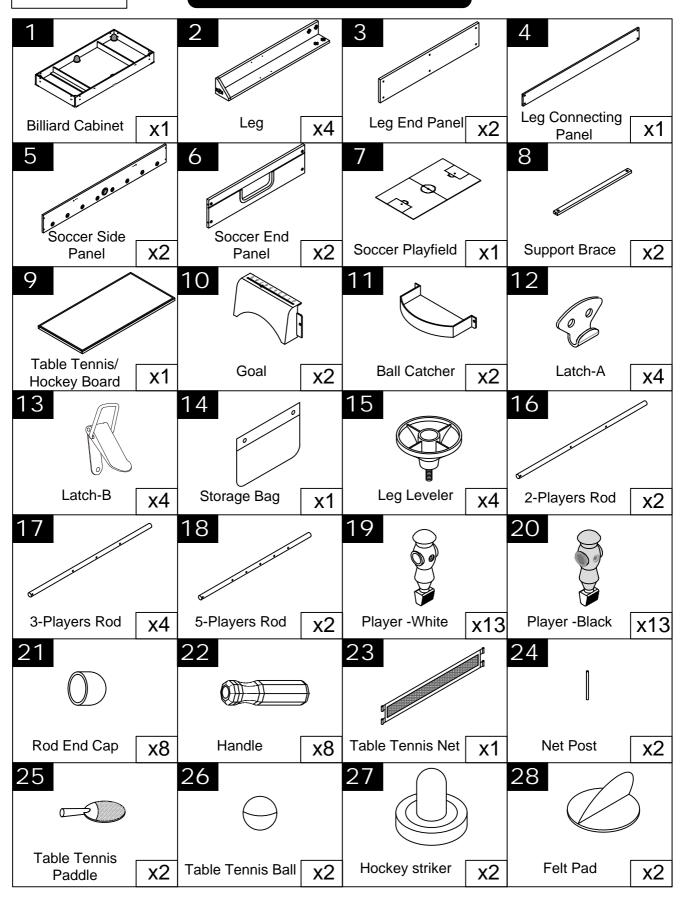


ENGLISH


GT23008 PARTS LIST

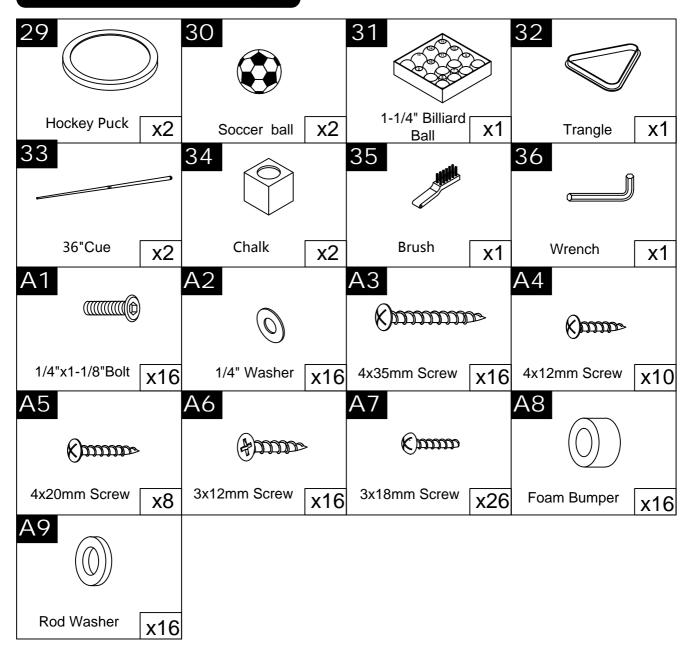

GT23008 PRE-INSTALLED PARTS

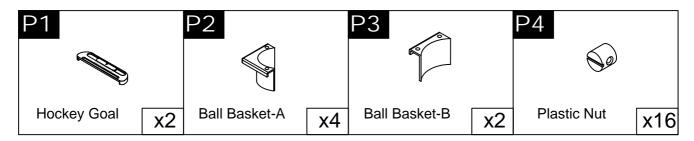

GT23008 PRE-INSTALLED PARTS

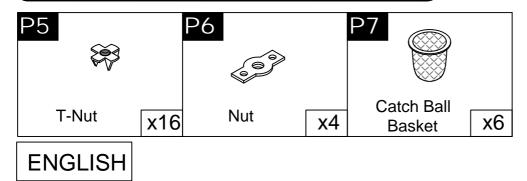

ASSEMBLY INSTRUCTIONS:

- 1. Find a clean, level place to begin the assembly of your Table. The table will be assembled upside down and then turned over on its legs once the assembly completed.
- 2. Remove all the parts from the box and verify that you have all of the listed parts as shown on the parts list Carefully cut or tear the four corners of the box so that the bottom of the box can be used as your work surface.


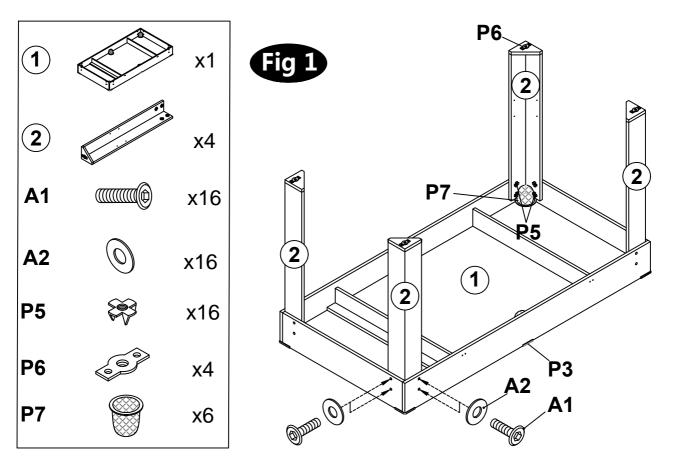


Fig 1

3. Attach the Legs (3) to the Billiard Cabinet (1) using two Bolts (A1) and two Washers (A2) per Leg. See FIG. 1.

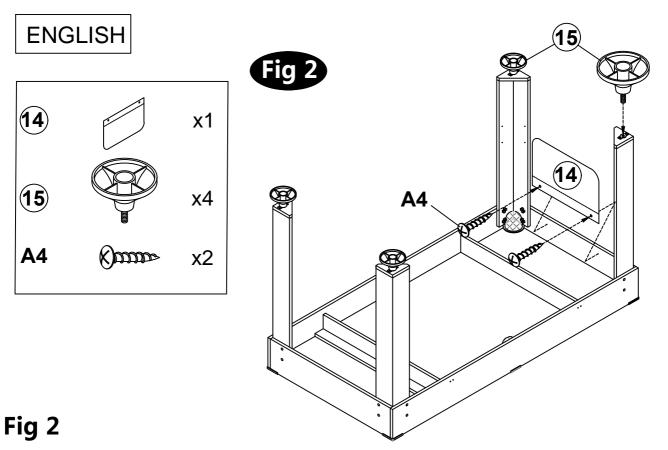

4. Attach the Storage Bag (14) to the Billiard Cabinet (1) using two Screws (A4. See FIG. 2.

5. Screw the Leg Levelers (15) into the bottom of each Leg (2).

Fig 3


A5

A5

Fig 3


Fig 3

6. Attach the Leg End Panel (3) to the Leg (1) using four Screws (A5). See FIG. 2.

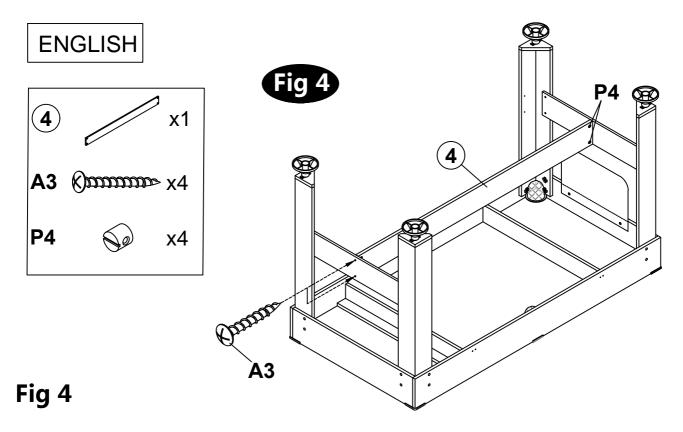


- 7. Attach the Leg Connecting Panel (4) to the Leg End Panel (3) using four Screws (A5). See FIG. 4.
- 8. Lift the table assembly from the floor with two adults, turn it over, and set the table on its leg in the location where you will play.

Go back and make sure that all connections are tight.

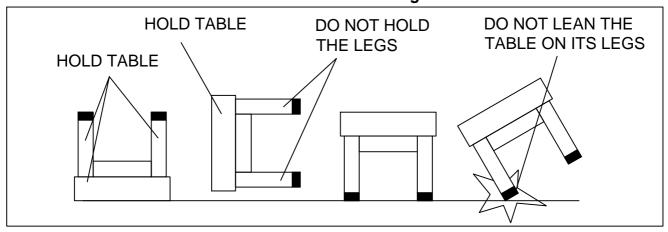


CAUTION: Two strong adults are recommended to turn the table over as shown.


- 1. Lift the table off the ground.
- 2. Turn the table over.
- 3. Place it on all four feet at the same time on the ground.

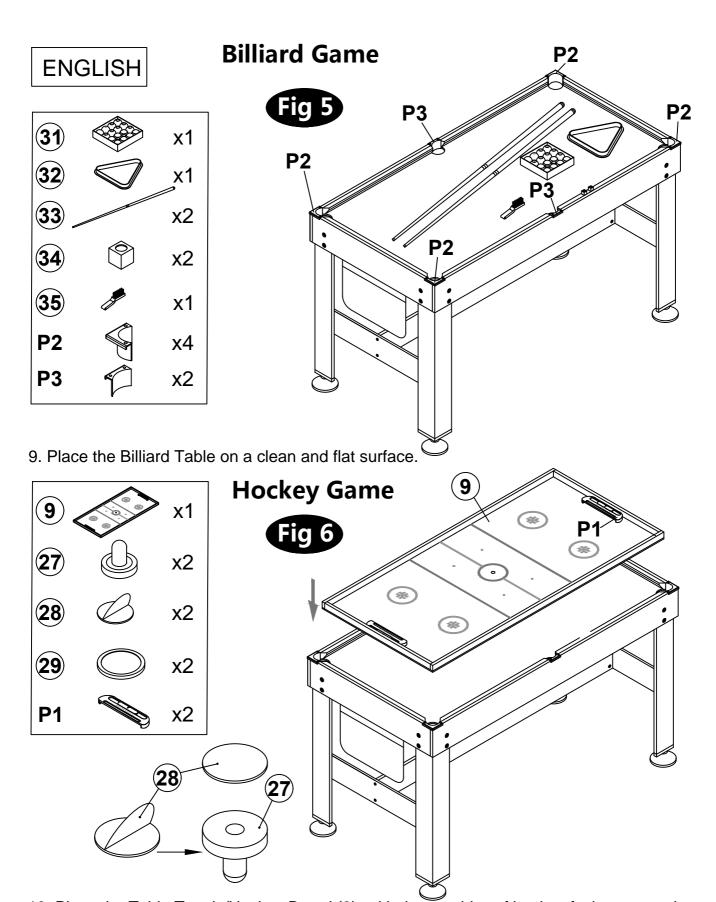

- 10. Place the Table Tennis/Hockey Board (9), with the graphics of hockey facing up, on the surface of the Billiard Table.
- 11. Tear off the backside paper of the Felt Pad (28) and stick them at the bottom of the Pushers (27).

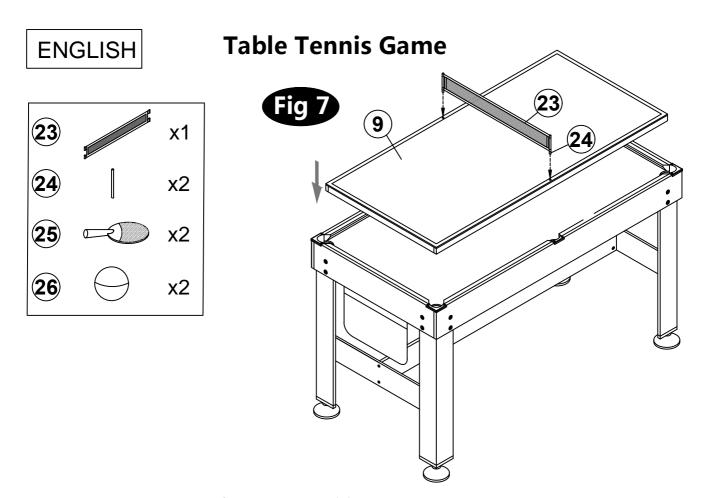

12. Place the Table Tennis/Hockey Board (9), with the graphics of table tennis facing up, on the surface of the Billiard Table.

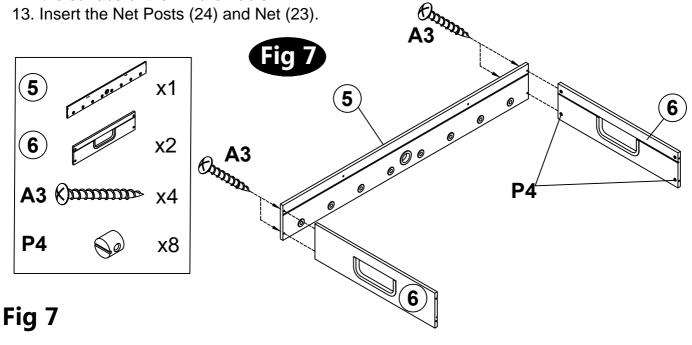

14. Attach one Soccer Side Panel (5) to the Soccer End Panels (6) using four Screws (A3) as shown in Fig.7.

Note: Do not tighten the Screws at this time.


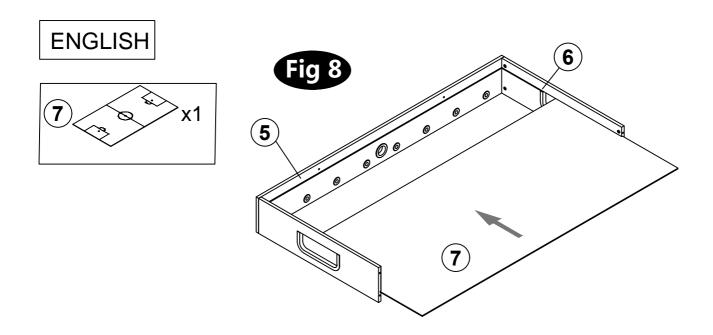



Fig 8

15. Slide the Soccer Playfield (7) into the groove on the Soccer Side Panel (5) and the Soccer End Panel (6) with graphics facing down. See FIG. 8.

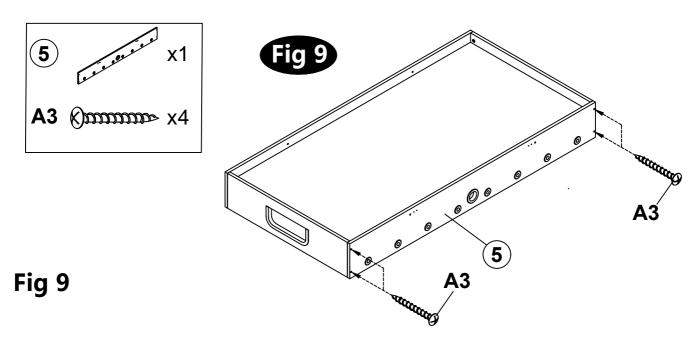


16. Attach the other Soccer Side Apron (5) to the Soccer End Aprons (5) using four Screws (A3).

Note: Do not tighten the Bolts at this time.

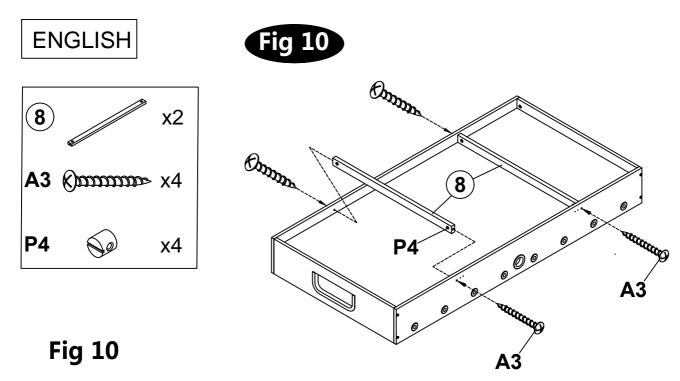


- 17. Place the Support Brace (8) on the Soccer Playfield (7), and then attach it to the Soccer Side Aprons (5) using two Screws (A3) per Support Brace (8).


 Now go back and tighten the Screws (A3) securely
- 18. Turn over the soccer cabinet (pre-assembled).

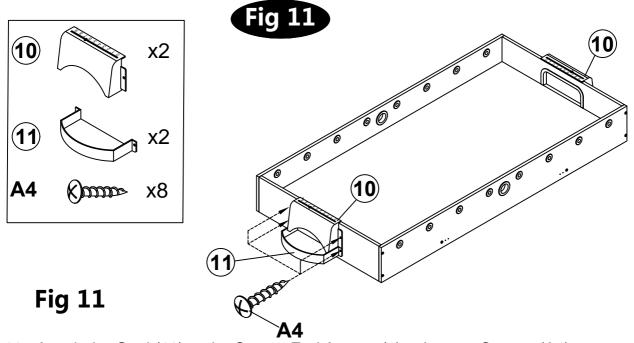

- 19. Attach the Goal (10) to the Soccer End Aprons (6) using two Screws (A4) .
- 20. Attach the Ball Catcher (11) to the Soccer End Aprons (6) using two Screws (A4).

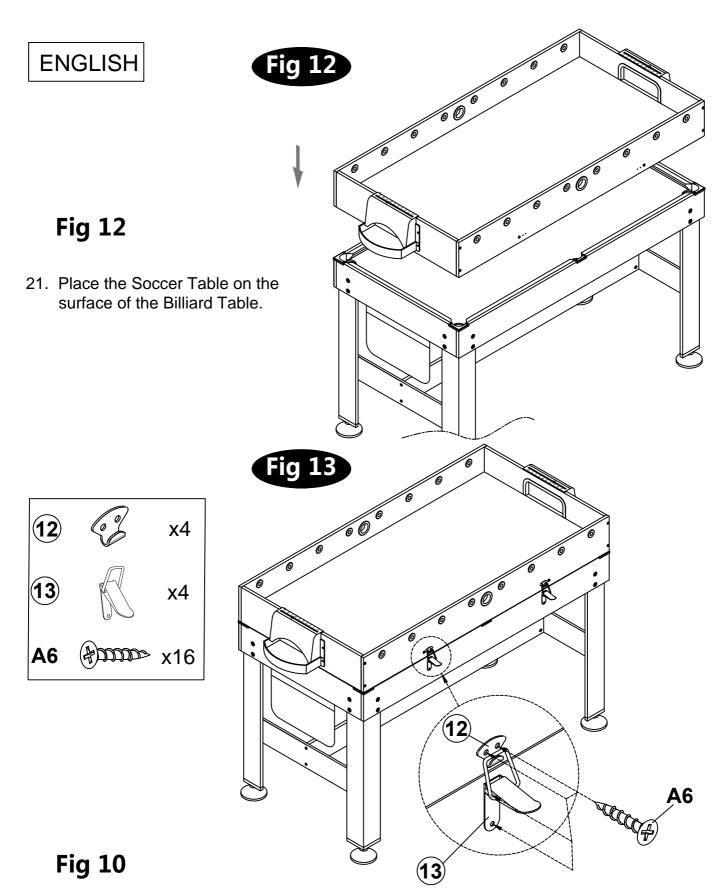

- 22. Attach the Latch-A (12) to the Soccer Side Aprons (5) using two Screws (A6) per Latch-A.See FIG.13.
- 23. Attach the Latch-B (13) to the Billiard Aprons using two Screws (A6)per Latch-B. See FIG.13.

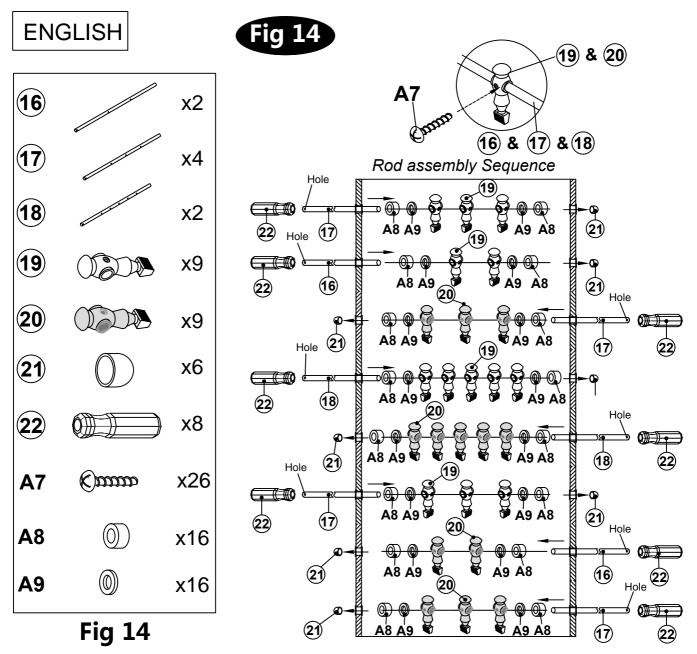

- 24. Push a Handle (22) onto each of the Player Rod(16&17&18) at the end of the rod where there is a hole as indicated in FIG. 14.
- 25. Take the Player Rod (16&17&18) which now has a handle on it. While holding the handle insert the other end through the first side panel only.
- 26. Thread onto the rod a Foam Bumper (A8) ,a Rod Washer(A9), Players-white (19), a Rod Washer(A9), and a Foam Bumper(A8) again. Push the rod through the other side of the table and cover the end with an end cap (21).
- 27. Repeat this process for the remaining rods, keeping team colors consistent on the left and right side of the table. Follow FIG.14 for the correct rod and number of men for each position.
- 28. Attach the Players (19 & 20) to the Player Rods(16&17&18) with screw (A7).