



25"/35"/42" 5-BLADE Ceiling Fan with Light

User Manual

GET MORE SUPPORT

If you experience any issues while operating our products, please directly reach out to our Customer Support via your order number. Or you can send your inquiry to our Official Customer Support at:



support@depuley.com



(001)201-365-0018

please scan the QR code to
watch the installation video.



WS-FPZ194



WARNING

It is prohibited to run the motor without a load. Powering on the motor for testing when the fan blades are not installed or the assembly is incomplete may lead to motor overheating, bearing damage, or circuit failures (the motor of the ceiling fan light is equipped with a built-in sensor that will automatically stop the operation when it is running without a load).

It is recommended to complete all the assembly work according to the installation guide before powering on to avoid damaging the motor.



WARNING

To avoid fire, shock, and serious personal injury, please read the following instructions carefully. Important Safety instructions.

- Before installing the fan, disconnect the power by removing fuses or turning off circuit breakers.
- Make sure the installation site you choose allows a minimum clearance of 7 feet from the blades to the floor and at least 30 inches from the tip of the blades to any obstruction (see the picture at the last page).
- If you are mounting the fan on a ceiling outlet box, use a metal sturdy base. Secure the box directly to the building structure. The outlet box and its support must be able to support the moving weight of the fan at least 45 pounds. Do not use a plastic outlet box. Attach the mounting brackets by winding the hardware provided with the can to the ceiling outlet box.
- If you are mounting the fan to a joist, make sure it is strong enough to support the moving weight of the fan (at least 45 pounds).
- After installing the fan, make sure all the connections are secured. This will prevent the fan from falling.
- Do not insert anything into the fan blades while the fan is operating.
- Turn the fan off and wait for it to stop before reversing fan direction.
- To reduce risk of electrical shock and personal injury, do not install the fan on a sloped ceiling.
- To reduce the risk of electrical shock and personal injury, do not use this fan with any solid-state.
- To reduce risk of personal injury, use only the two steel screws and lock washers provided with the fan for mounting the outlet box.

RISK OF ELECTRIC SHOCK

- Before you start installing this ceiling fan, disconnect the power supply by turning off the circuit breaker.
- All electrical connections must be in accordance with local standard National Electrical Code (NEC) and ANSI/NFPA 70.
- Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections.
- Do not alter, re-locate, or remove wiring when nothing goes wrong with the product.
- Double-check all connections and screws to be sure they are tight and correct.
- Verify whether the supply voltage is correct by comparing it with the product information.

RISK OF INJURY

- Keep all the parts of this product away from children. The package contains many small or heavy parts that may bring children the risk of injury.
- Make sure to install all parts firmly enough in case they fall while running. Carefully check all screws, bolts, and washers on the fan assembly to ensure they are secured.
- Wear safety gloves and safety glasses always when installing or removing the light or the fan, or performing maintenance. Some parts of the components are sharp and may hurt your hands; please make sure you are wearing safety gloves when touching and installing the components.
- Wear rubber-soled shoes and work on a sturdy ladder.

RISK OF ELECTRIC SHOCK


- Periodically cleaning your ceiling fan is the only required maintenance. When a soft brush or lint-free cloth to avoid scratching the paint, please turn off the electrical power before you clean your fan.
- Do not use water when cleaning your ceiling fan. It could damage the motor or the blades or even cause an electrical shock.
- The motor has permanently lubricated ball bearings. No need to oil.

MAKE SURE THE POWER IS OFF IN THE ELECTRICAL PANEL BOX BEFORE YOU DO ANY CLEANING OR REPAIRS.



WARNING

To avoid serious injury or death, turn off the power at the circuit breaker before installing the fan.



TURN OFF

IMPORTANT

To avoid abnormal operation, do not connect the product to the dimmer switch or fan speed switch.



Applicable to only one type of ceiling




Downrod Mount



Sloped Ceiling Mount



Installation distance reference

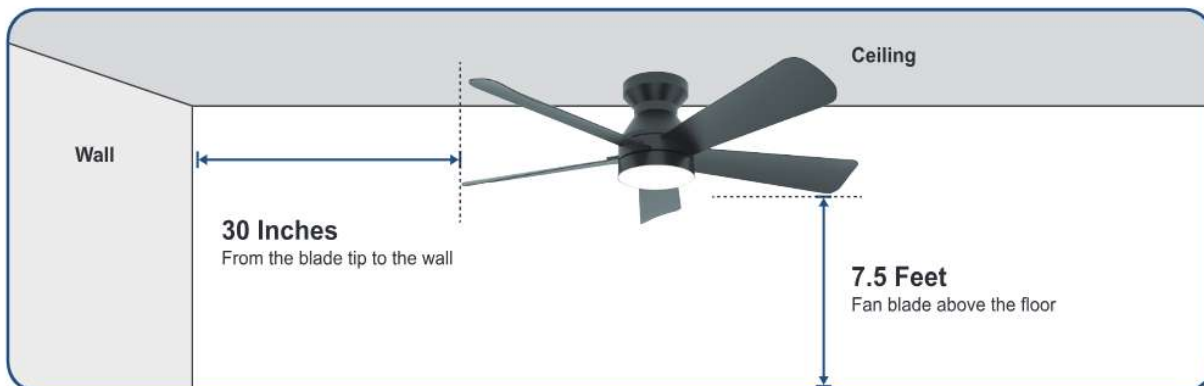

TOOLS NEEDED



Phillips Screwdriver



Wire Stripper



Step Ladder



Safety Gloves



If you have trouble reading the instructions, please scan the QR code to watch the installation video.



01



02



03

Need a Video instruction Guide?
Please scan the QR code

If the QR code is invalid, please contact us for the video.

This instruction manual applies to the following products:





Accessories List

Part 05



01.Receiver



02.Hanging Board



03.Lamp body




04.Motor



Remote Control



05.Blade



Notice:

The quantity listed above is the number required for installation. If there is a missing part in your package, please reach out to us. support@depuley.com

Section 1

Hanger Board



Difficulty Level: ★☆☆☆☆

Let's move towards success with a relaxed start !

Needed Accessories



x1



x4






Installation Steps

Hanger Board Fan Blades & Motor Receiver


Wood Ceiling



Junction Box

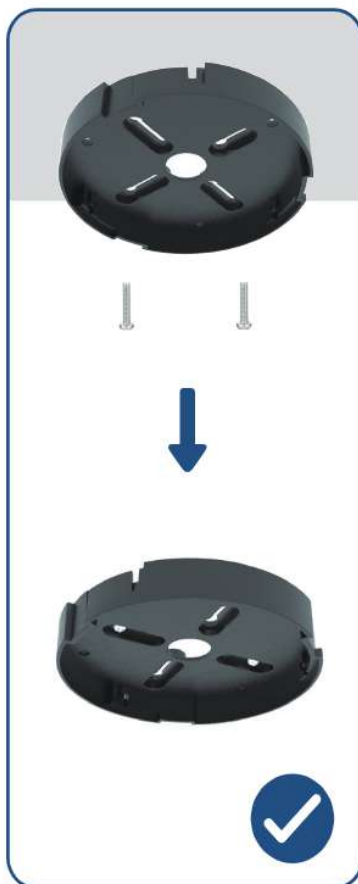

Concrete Ceiling

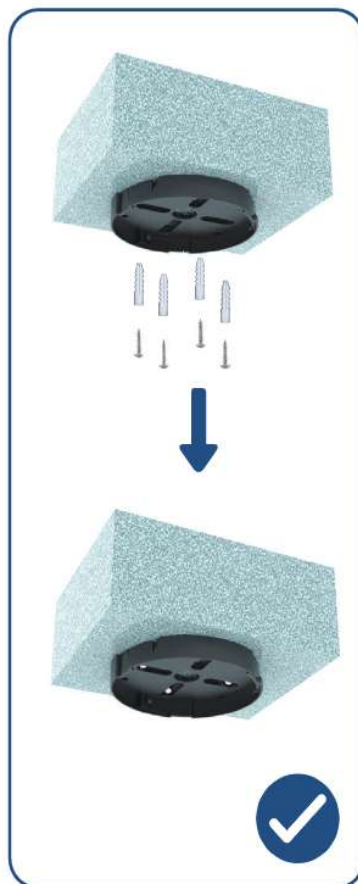

Don't Install On Sloped
Ceiling Mount



Section 2

Fan Blades & Motor



Difficulty Level: ★ ★ ★ ★ ★

There will be some wiring involved, but don't worry,
I'm sure you can do it !

Needed Accessories

M3x8mm



x5



x6



x1



x1



x1



x5







Installation Steps

Hanger Board Fan Blades & Motor Receiver

01

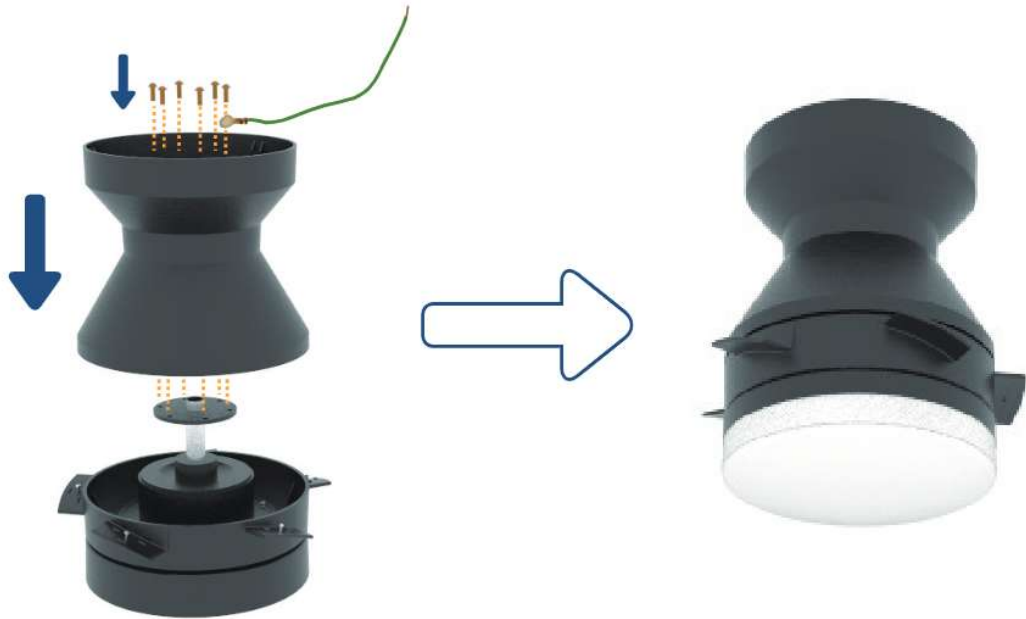

02

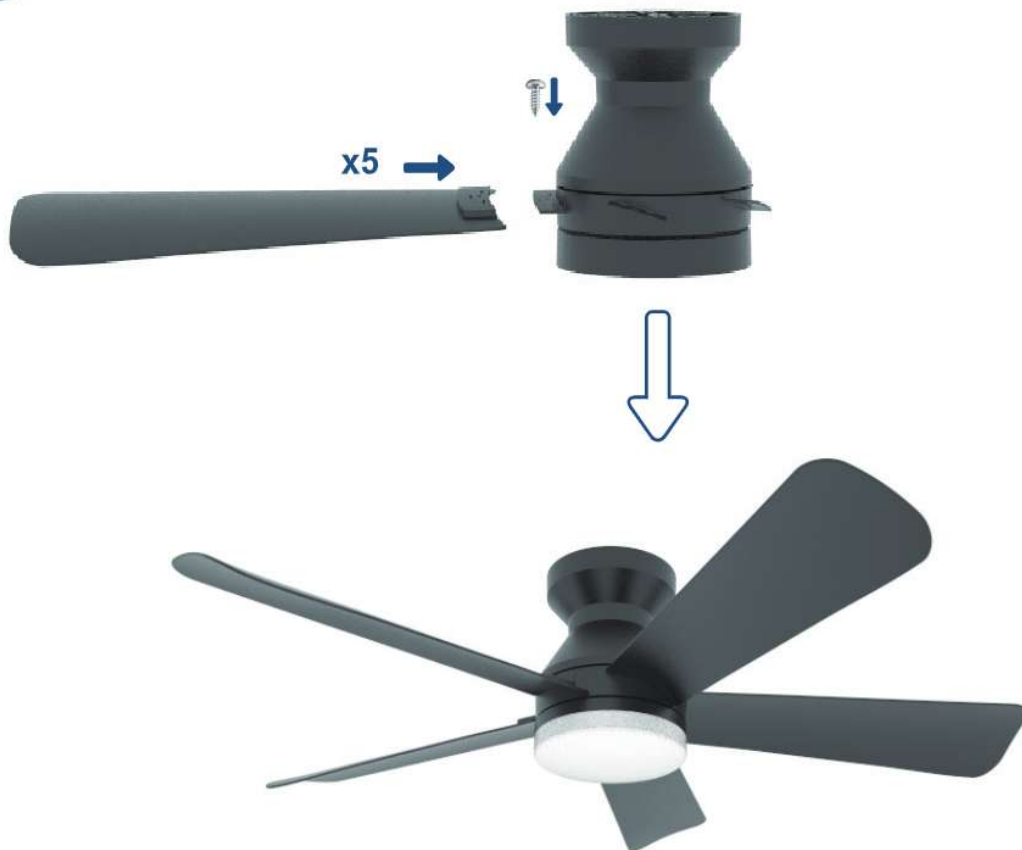

Section 3

Receiver



Difficulty Level: ★ ★ ★ ☆ ☆

Needed Accessories

M4x15mm



x3



x3

M4x8mm



x2



x1



x1






Installation Steps



01



02

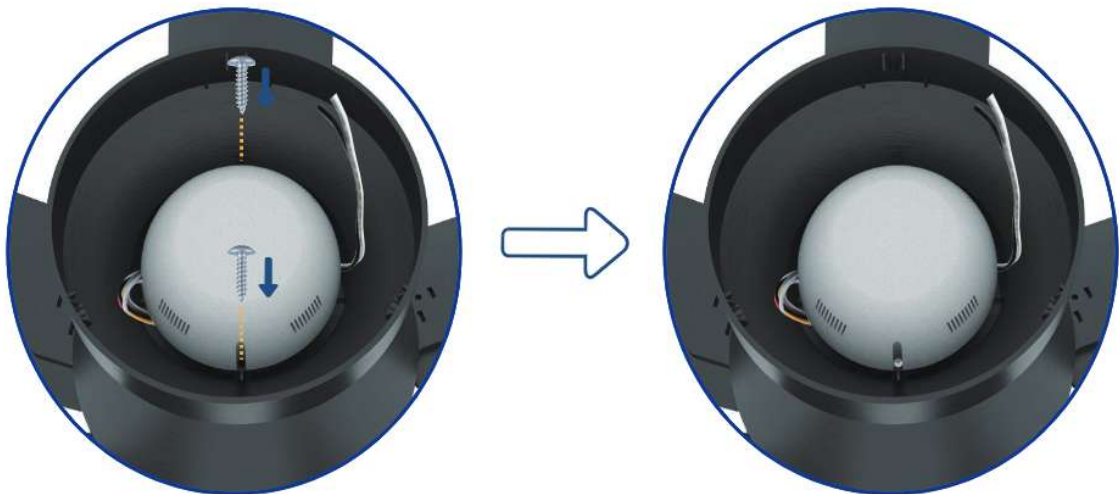




Installation Steps

Hanger Board Fan Blades & Motor Receiver

03

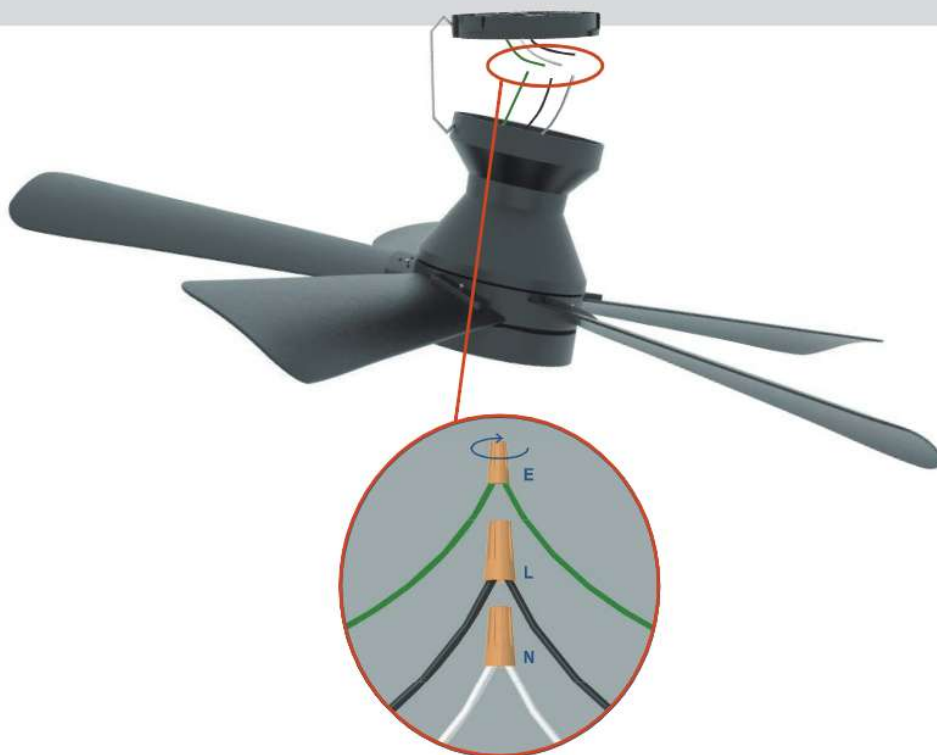

The function of the safety hook is to facilitate the customer to connect the wire, and the hook should be removed after the wire is connected.



Installation Steps

Hanger Board Fan Blades & Motor Receiver

04




05



06



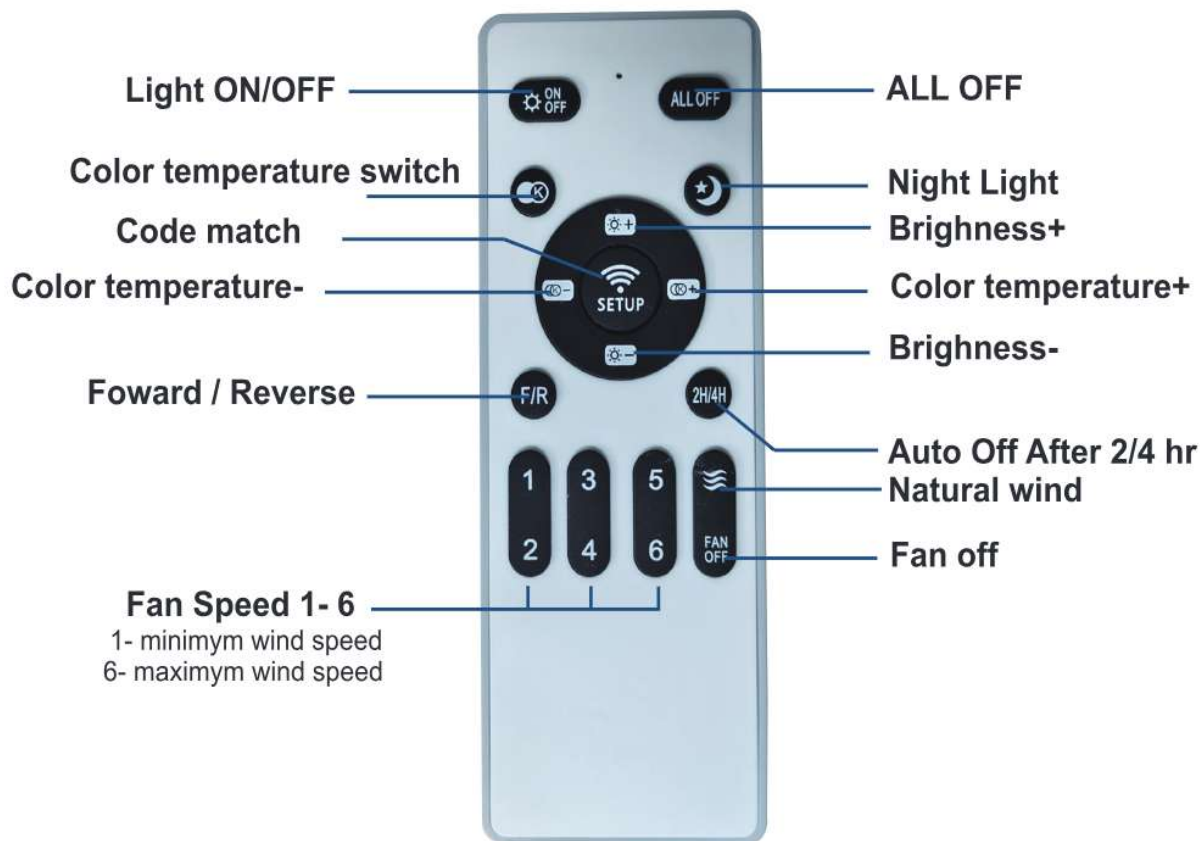

Remote Control

Points For Attention



- **Install 1.5*2 volt battery**(not included)
(To prevent damage to transmitter, remove the battery if not used for a long time)
- **Do not place the remote control in an excessively hot or humid environment**
- **Remote control learning code method:**
Power off the receiver for 5 seconds. Turn on the power and immediately press and hold the key of **SETUP** for 3 seconds. Until the state of the light or motor changes then learn successfully.



Your fan may occasionally jerk forward or backward upon starting up, This is normal and does not affect the fan operation, Try these troubleshooting steps before contacting customer service.

Problem	Solution
Fan not spinning	Make sure the fan is getting power. Check your circuit breaker or fuse panel and wall switch for functionality. Check to make sure the fan wires are correctly connected to the house wires. Remote control must be paired with the fan within 1 minute after connecting the fan to the electrical. Use a multimeter and test the adapter wiring harness to see if there is any electrical output. All the pin wiring on the circuit board must be inserted tight and in the correct position. Make sure the fan blades spin freely. If you're using a wall control, check the power to the breaker from your control and try working your ceiling fan manually. (Normal switch only for the fan power on/off)
Fan light not working	Make sure LED wires are connected to the circuit board. Make sure the whole fan is powered.
The fan is noisy and wobbling	Check if the blade screws are NOT rubbing against any part of motor housing. Check the pin wires are NOT connected against any moving parts. Check the down fan cup is NOT hitting the motor. Confirm the canopy is NOT touching the ceiling while the fan is in operation. Check the down rod is NOT slanted. Tighten any loose screws on the light kit, fan blades, motor coupling, down rod, brackets and mounting hardware. Confirm the hanger ball is firmly seated in the mounting bracket. The ceiling beam must meet the minimum tensile test strength of 30KG for installation. Verify the wire connections are not rattling against each other. Verify the fan blades are not cracked, If the fan blades are cracked, replace the damaged blades with a new blade set from the same brand as your ceiling fan to ensure compatibility. Confirm the light kit is NOT slanting and hitting the motor.
The fan or light automatically turns on/off	Confirm the circuit breaker is not malfunctioning. Verify the wire connections are not frayed. Check the app is not set to a timer or schedule. Cut the fan power for 10 minutes then power on again. All the pin wiring on the circuit board must be inserted tight and correct position.



Note:

English

1. The lamps may only be installed by authorized and qualified technicians according to the valid regulations for electrical installation.
2. The manufacturer does not accept any responsibility for injuries or damage resulting from improper use of the light.
3. Attention! Before starting the installation work, make sure that the mains power line is voltage-free—turn off safety cutout or unscrew the protection fuse. The switch must be “OFF”.
4. Warning! Before drilling the mounting holes, make sure that no gas, water or electricity pipes and wires can be drilled through or damaged in your chosen mounting location.
5. Description of the supply terminals: L = Phase N = Neutral conductor  Earthed conductor.

Notiz:

Deutsch

1. Die Leuchten dürfen nur von autorisiertem Fachpersonal nach den jeweils geltenden Elektro- Installationsvorschriften installiert werden.
2. Der Hersteller übernimmt keine Verantwortung für Verletzungen oder Schäden, die Folge eines unsachgemäßen Gebrauchs der Leuchte sind.
3. Achtung! Vor Beginn der Montagearbeiten die Netzleitung spannungsfrei schalten – Sicherungsautomat ausschalten bzw. Sicherung heraus drehen. Sicherungshalter auf “AUS”.
4. Achtung! Vergewissern Sie sich vor dem Bohren der Befestigungslöcher, dass an der Bohrstelle keine Gas-, Wasser- oder Stromleitungen angebohrt oder beschädigt werden können.
5. Bezeichnung der Anschlussklemmen: L = Phase N = Neutraleiter  = Schutzleiter.

Noter:

Français

1. Les lampes doivent être installées par un personnel spécialisé uniquement, en suivant les instructions d'installation électronique en vigueur.
2. Le fabricant n'est pas responsable des blessures ou des dommages résultant d'une utilisation incorrecte des lampes.
3. Attention! Avant de commencer les travaux de montage, éteindre la tension du cordon d'alimentation— éteindre le disjoncteur ou dévisser les fusibles. Placer le commutateur sur “OFF”.
4. Attention ! Avant le perçage des trous de fixation, assurez-vous qu'il n'y ait aucun dommage causé aux conduites de gaz, d'eau ou électriques à l'endroit du forage.
5. Description des bornes serre-fils : L = Phase N = Conducteur neutre  = Câble de protection terre.



EU: G store

EU	REP	Company: E-CrossStu GmbH Address: Mainzer Landstr. 69,60329 Frankfurt am Main Email: E-CrossStu@web.de Nr.202406215376
Above address is ONLY for EU representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: foshanshigulakejinchukouyouxiangongsi Address:Danzaozhen jianshalu dongerqu1hao Liandongyoububeiyuan13zuo103shisiceng402 Foshanshi Nanhaiqu Guangdongsheng 52800 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

EU: N store

EU	REP	Company: E-CrossStu GmbH Address: Mainzer Landstr. 69,60329 Frankfurt am Main Email: E-CrossStu@web.de Nr.202406581022
Above address is ONLY for EU representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: Foshanshi wansiguangdian kejiyouxian'gongsi Address: Jun'anzen Jun'anshequ Juminweiyuanhui Baiannanlu 279 hao zhi san Foshanshi Shundequ Guangdongsheng 528300 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

EU: P store

EU	REP	Company: E-CrossStu GmbH Address: Mainzer Landstr. 69,60329 Frankfurt am Main Email: E-CrossStu@web.de Nr.202406311414
Above address is ONLY for EU representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: Foshan BeiMa ZhaoMing KeJi Youxian Gongsi Address:Danzao Town, Jinshadonglianakaifu 2 hao chenhairuichangfang 2 lou Foshan City Nanhai District Guangdong Province 528225 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		



EU: V store

EU	REP	Company: E-CrossStu GmbH Address: Mainzer Landstr. 69,60329 Frankfurt am Main Email: E-CrossStu@web.de Nr.202406422650
Above address is ONLY for EU representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: guangzhoushi wansi guangdian keji youxiangongsi Address: huadidadaozhong 295hao erlou guangzhoushi liwanqu guangdongsheng 510000 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

EU: A store

EU	REP	Company: E-CrossStu GmbH Address: Mainzer Landstr. 69,60329 Frankfurt am Main Email: E-CrossStu@web.de Nr.202507560865
Above address is ONLY for EU representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: guangzhoushiliwanquaodingdianqidian Address: Huadidadaozhong No.449 Zibian10-2A(erceng) Liwanqu Guangzhoushi 510385 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

UK: A store

UK	REP	Company name: YH Consulting Limited Address: C/O YH Consulting Limited Office 147 Centurion House, London Road Staines-upon-Thames, Surrey, TW18 4AX Email: H2YHUK@gmail.com No.202507385279
Above address is ONLY for UK representative purpose. NOT INVOLVINGIN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: guangzhoushiliwanquaodingdianqidian Address: No. 449 Huadi Avenue Middle, Liwan District, self compiled 10-2A (second floor) Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		



UK: P store

UK	REP	Company name: YH Consulting Limited Address: C/O YH Consulting Limited Office 147 Centurion House, London Road Staines-upon-Thames, Surrey, TW18 4AX Email: H2YHUK@gmail.com No.202406580247
Above address is ONLY for UK representative purpose. NOT INVOLVING IN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: Foshan BeiMa ZhaoMing KeJi Youxian Gongsi Address: Danzao Town, Jinshadongliankaifu 2 hao chenhairuichangfang 2 lou Foshan City Nanhai District Guangdong Province 528225 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

UK: G store

UK	REP	Company name: YH Consulting Limited Address: C/O YH Consulting Limited Office 147 Centurion House, London Road Staines-upon-Thames, Surrey, TW18 4AX Email: H2YHUK@gmail.com No.202406818374
Above address is ONLY for UK representative purpose. NOT INVOLVING IN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: foshanshigulakejinchukouyouxiangongsi Address: Danzaozhen jianshalu dongerqu 1 hao Liangdongyougubeiyuan 13 zuo 103 shisiceng 402 Foshanshi Nanhaiqu Guangdongsheng 52800 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		

UK: V store

UK	REP	Company name: YH Consulting Limited Address: C/O YH Consulting Limited Office 147 Centurion House, London Road Staines-upon-Thames, Surrey, TW18 4AX Email: H2YHUK@gmail.com No.202406424460
Above address is ONLY for UK representative purpose. NOT INVOLVING IN ANY SALE OR PRODUCT RETURN. Only manufacturer, importer or seller shall be solely held responsible for product quality or after sale issues.		
Importer: guangzhoushi wansi guangdian keji youxiangongsi Address: huadidadaozhong 295 hao erlou guangzhoushi liwanqu guangdongsheng 510000 CN Manufacturer: Foshan Vance Photoelectric Technology Co.Ltd. 2nd Floor, No 279, Baiannan Road, Junan Town, Shunde District, Foshan, Guangdong, China Contact: Shixi Ding Email: support03@dingliled.com		



GET MORE SUPPORT

We believe that after-sales service is an integral part of the customer experience, and we are dedicated to making it as seamless and hassle-free as possible. If you experience any issues while operating our products, please directly reach out to our Customer Support via your order number. Or you can send your inquiry to our Official Customer Support at:

 support@depuley.com

 (001)201-365-0018