

LED Bathroom Mirror User Manual

IMPORTANT SAFETY INSTRUCTIONS

- 1) Please carefully read these instructions before installation and retain for your future reference.
- 2) It is the company's policy to recommend the use of a qualified electrician for the installation of these fittings.

DANGER: To reduce the risk of electrical shock

- 1) For safety reasons always ensure that the mains supply switch is isolated before attempting installation;

WARNING: To reduce the risk of burns, fire, electrical shock or injury to persons:

- 1) We recommend that the surface fuse is withdrawn to prevent accidental switching on while work is in progress;
- 2) Close supervision is necessary when the mirror light is used by or near children, invalids or disabled.
- 3) Use mirror light only for its intended use as described in these instruction. Do not use attachments not recommended by the manufacturer.
- 4) Never operate the mirror light if it has a damaged wire . If it is not working properly. If it has been dropped or damaged or dropped into water. Return the furnishing to a service center for examination or repair.
- 5) Keep the wire away form heated surfaces.
- 6) Never drop or insert any object into any opening.
- 7) This product contains glass parts. Care must be taken when fitting or handling these parts to prevent personal injury or damage to the products.
- 8) Ensure the mounting surface is dry and strong enough to allow for the safe fitting of this fixture.
- 9) Ensure that current building regulations are adhered to at all times should an additional electrical supply be required.
- 10) Care must be taken before drilling fixing holes to avoid any existing wiring or paperwork that may be concealed;
- 11) Finish the installation as following steps:
- 12) Do not use outdoors
- 13) Mounting distance from ground do not exceed 1.5m


WARNING:

- 1) **Risk of Electric Shock-Connect this furnishing to a properly grounded outlet only.**
- 2) **Grounding Instructions:** This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product."

Specification

Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight (kg)
20"X28"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	4520	90	48	110V	6.9
24"X32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5480	90	60	110V	8.8
24"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5960	90	60	110V	9.68
24"X40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6125	90	60	110V	10.5
28"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6251	90	60	110V	11
36"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.5
32"X40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.3
32"X48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9074	90	100	110V	15.4
36"X48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9660	90	100	110V	17.2
28"X60"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9500	90	100	110V	16.8
32"X72"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12210	90	150	110V	22.5
55"X30"	1.5"	3	2835 3 colors 192LED	3000/4000/	9500	90	150	110V	19
60"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	10500	90	155	110V	17.5
72"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12000	90	150	110V	12.5
84"X32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	14920	90	150	110V	28
96"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	18620	90	150	110V	32

Installation

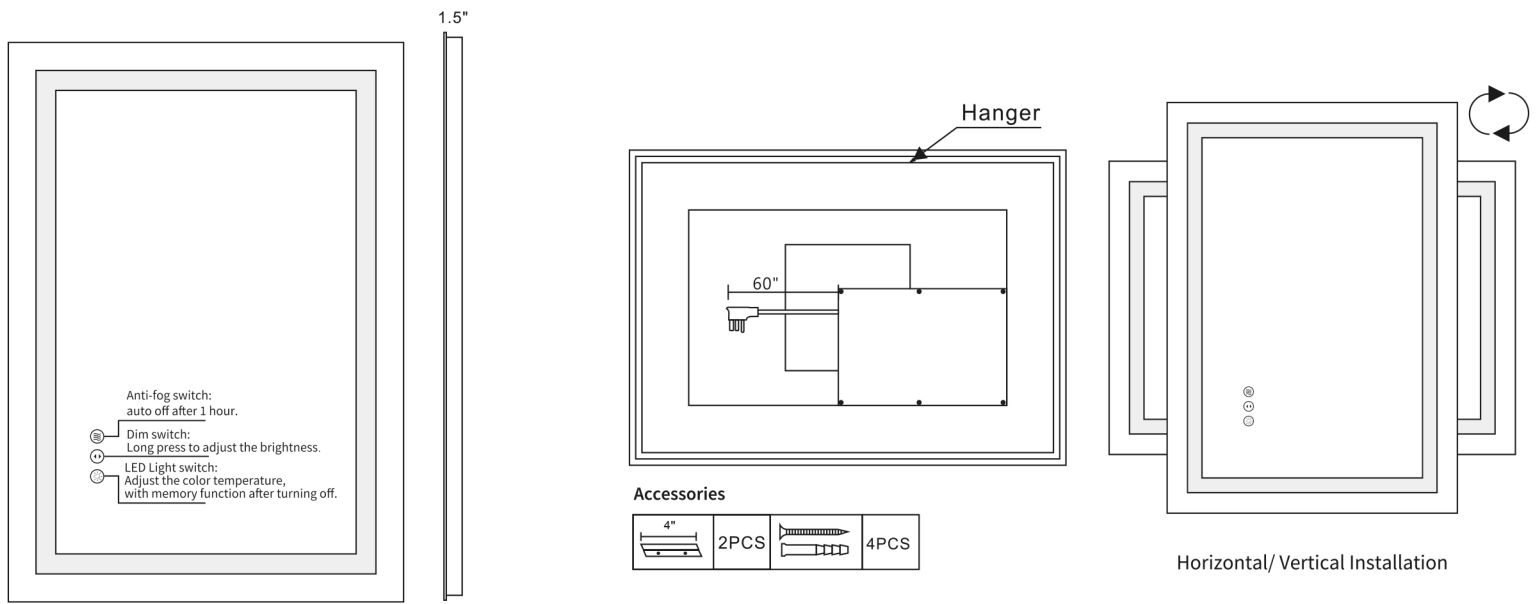

<p>Power Method 1 (Plug in)</p>	<p>Power Method 2 (Hardwire)</p>	<p>Step 3</p>	<p>Step 4</p>
<p>Step 1</p> <p>Draw a straight line with a ruler to keep the mirror horizontal</p>	<p>Step 2</p> <p>Drill 2 holes or 4 holes according to screws you received.</p>	<p>Step 5</p>	<p>Step 6</p>

Maintenance

- 1) Mirror(s) should only be cleaned with clean chamois leather moistened with warm water and given a final polishing buff with a soft, lint free cloth.
- 2) Do not use any chemical or abusive cleaners.