


ELECTRONIC GUNSECURITY CABINET









INSTRUCTION MANUAL

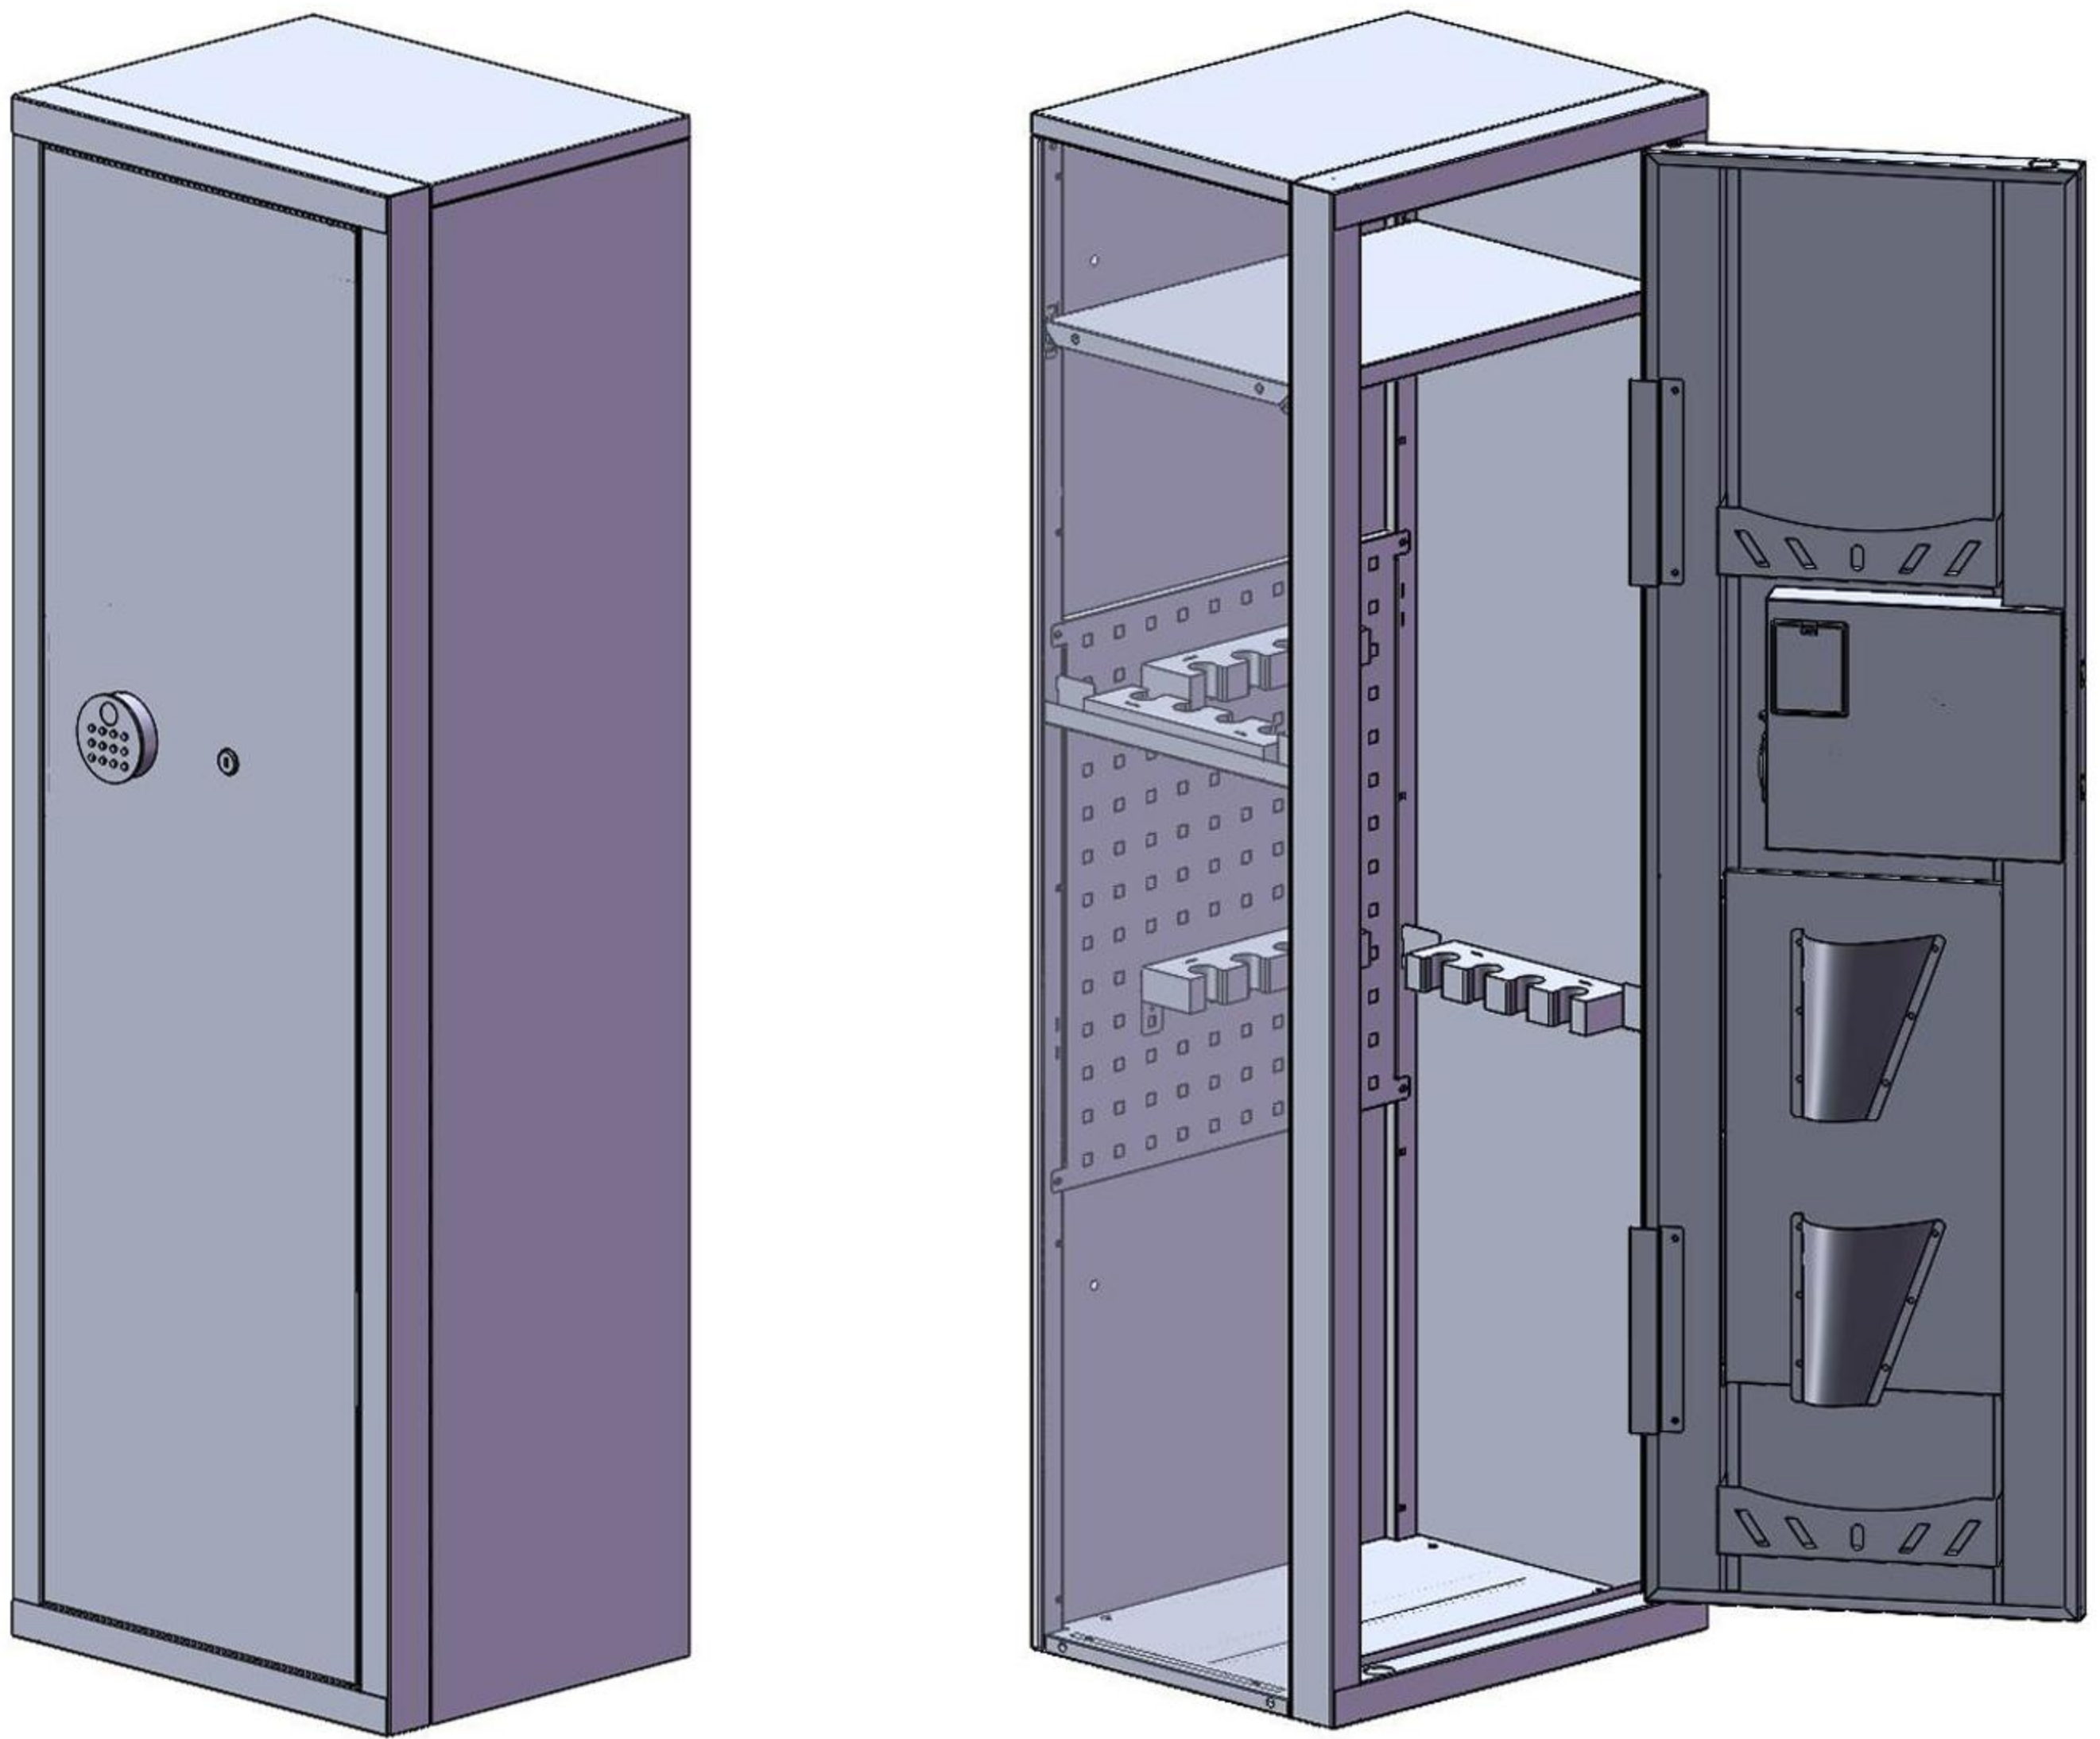


KEEP CHILDREN OR UNAUTHORIZED INDIVIDUALS AWAY YOUR GUN


COMPONENT DESCRIPTION

Hi friend,
Thank you for your purchase, please take a few minutes to read the instruction manual for better use of the product, if you have any questions please contact the seller for your service.

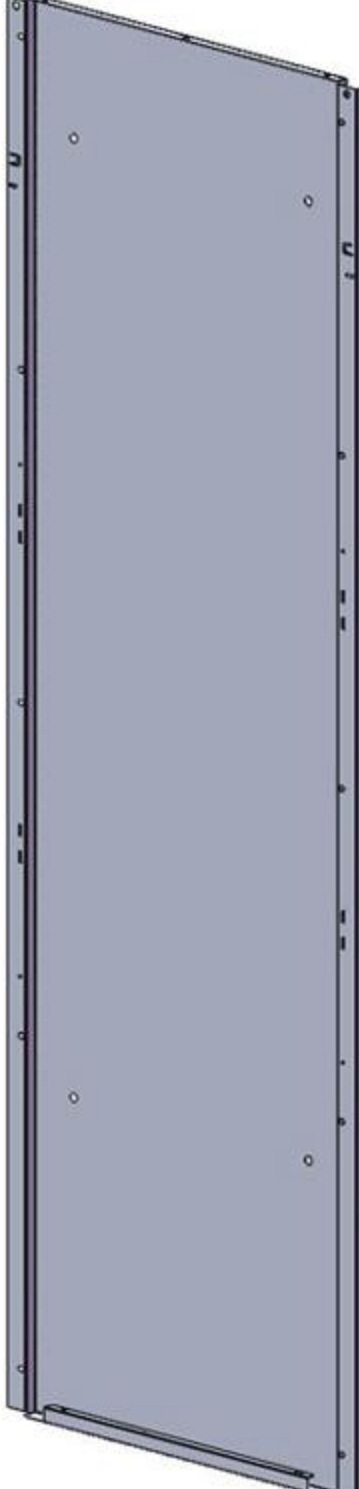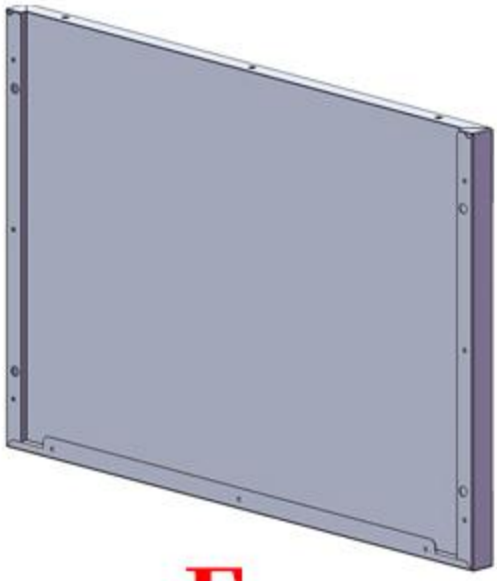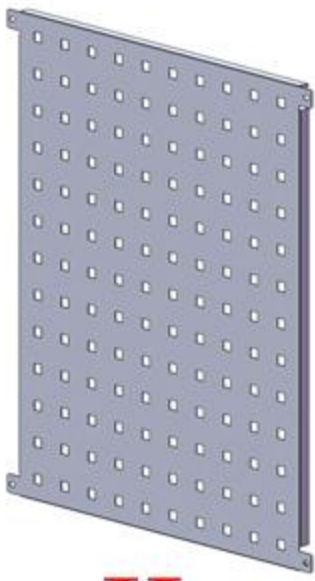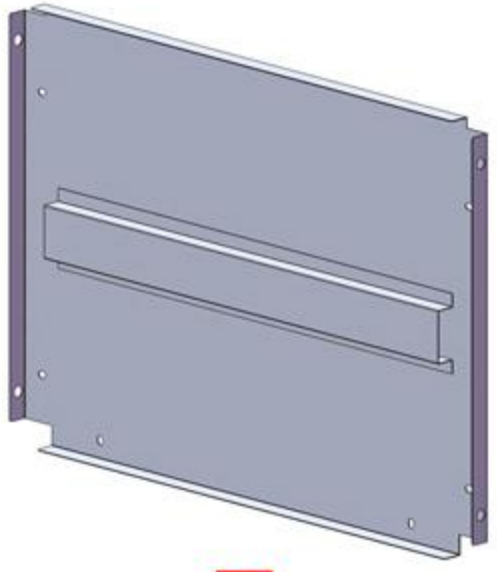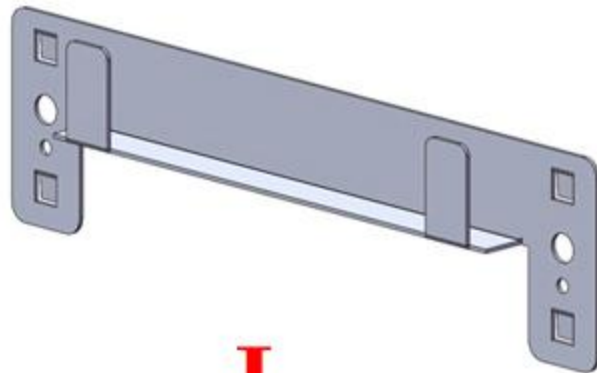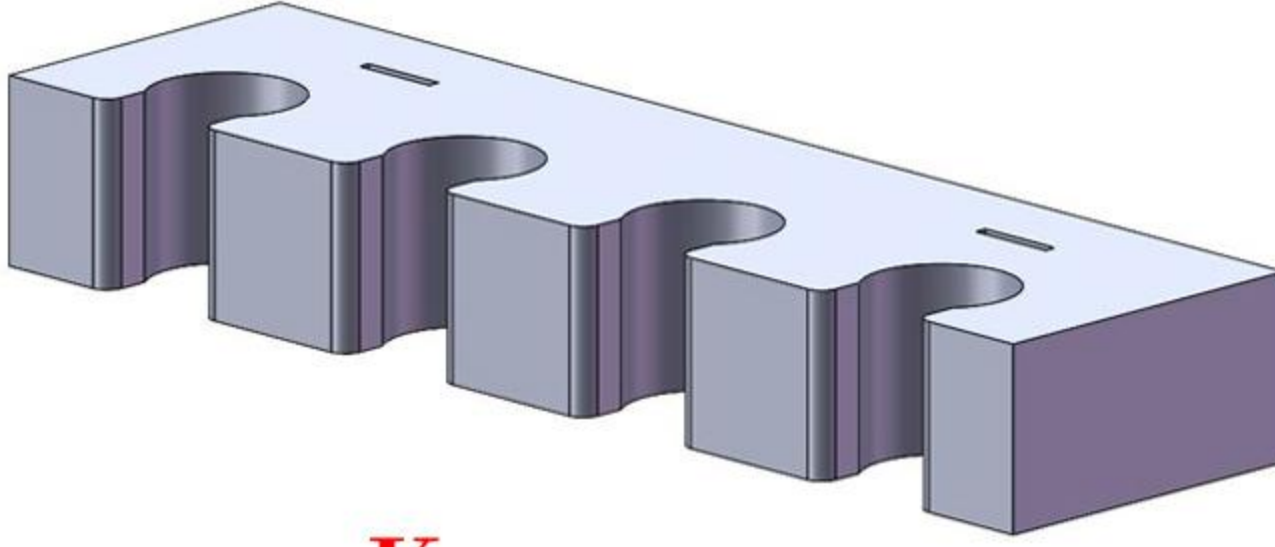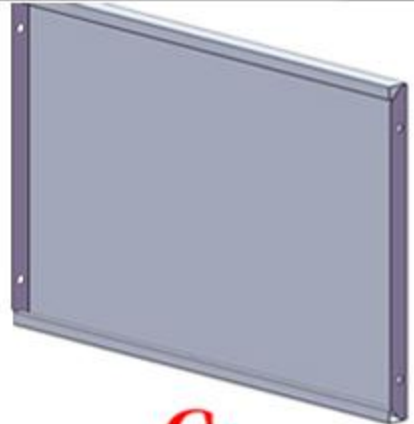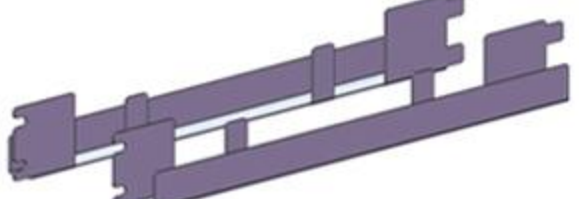					
A 1 PC	B 1 PC	C 1 PC	D 1 PC	E 1 PC	H 1 PC
					
				F 1 PC	I 2 PC
					
K 4 PC				G 1 PC	J 2 PC
					
					S 1 PC

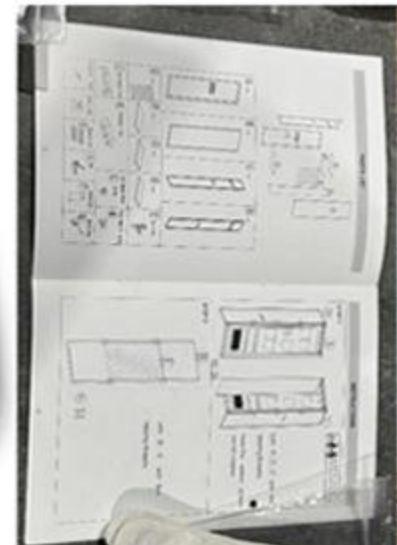L	M	N*46	O*4	P*4	Q	R	T
							

STRUCTURAL SCHEMATIC

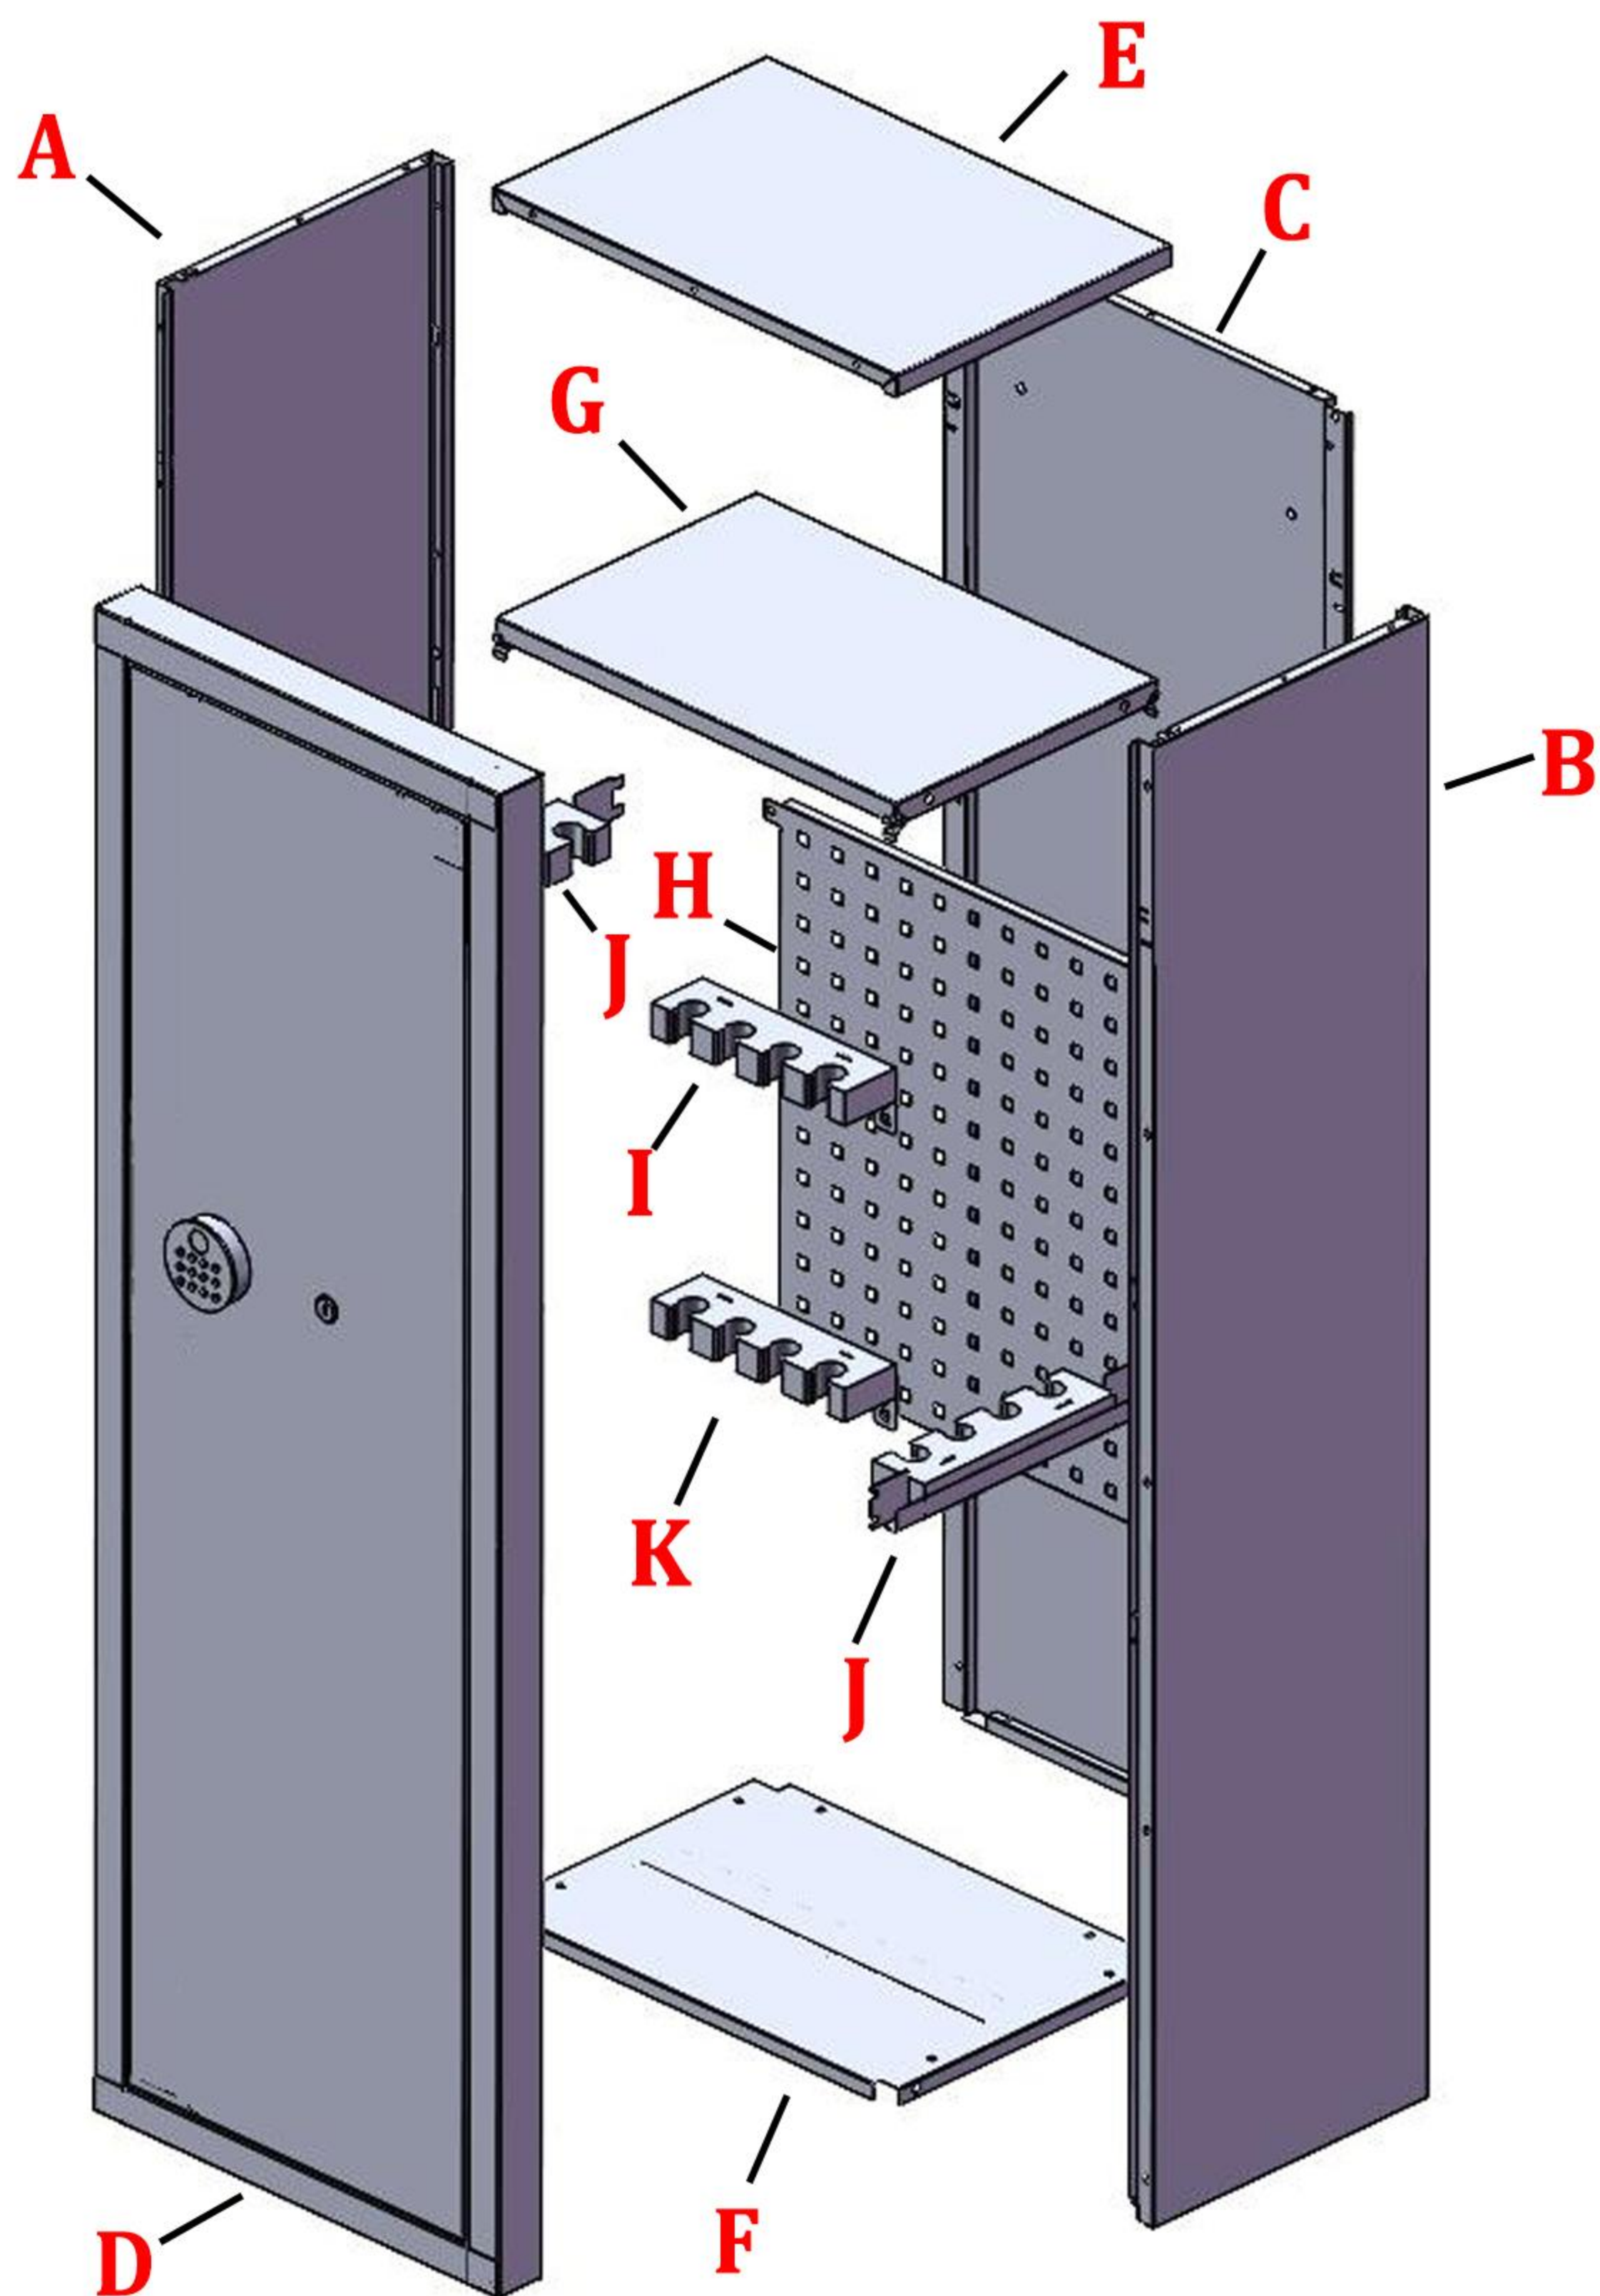

- Check the materials to make sure they are working correctly and are not damaged.
- Refer to the illustrations to identify the parts and accessories of the gun cabinet.
- If any parts are missing or goods are damaged, please contact us, and we will provide you with a satisfactory solution.



WARNING





Tip Over Hazard

- Please secure the gun safe to a wall or floor before use to prevent children or adults from tipping the safe over and causing death or serious injury.
- Children should not play around the safe at any time.

INSTALLATION INSTRUCTIONS

Step1 :

1. Bring protective gloves with the feeding bag;
2. Use a screwdriver inside the material package to securely connect and tighten clockwise N (M5 * 10 self tapping) between A and B and D;

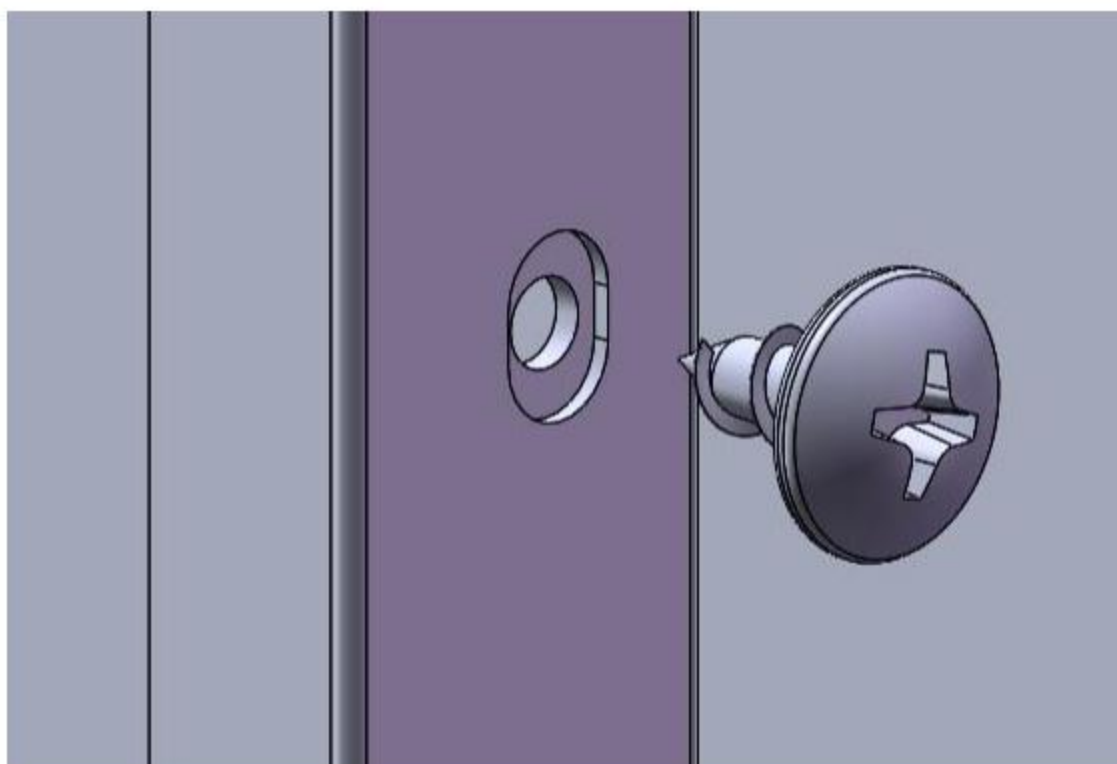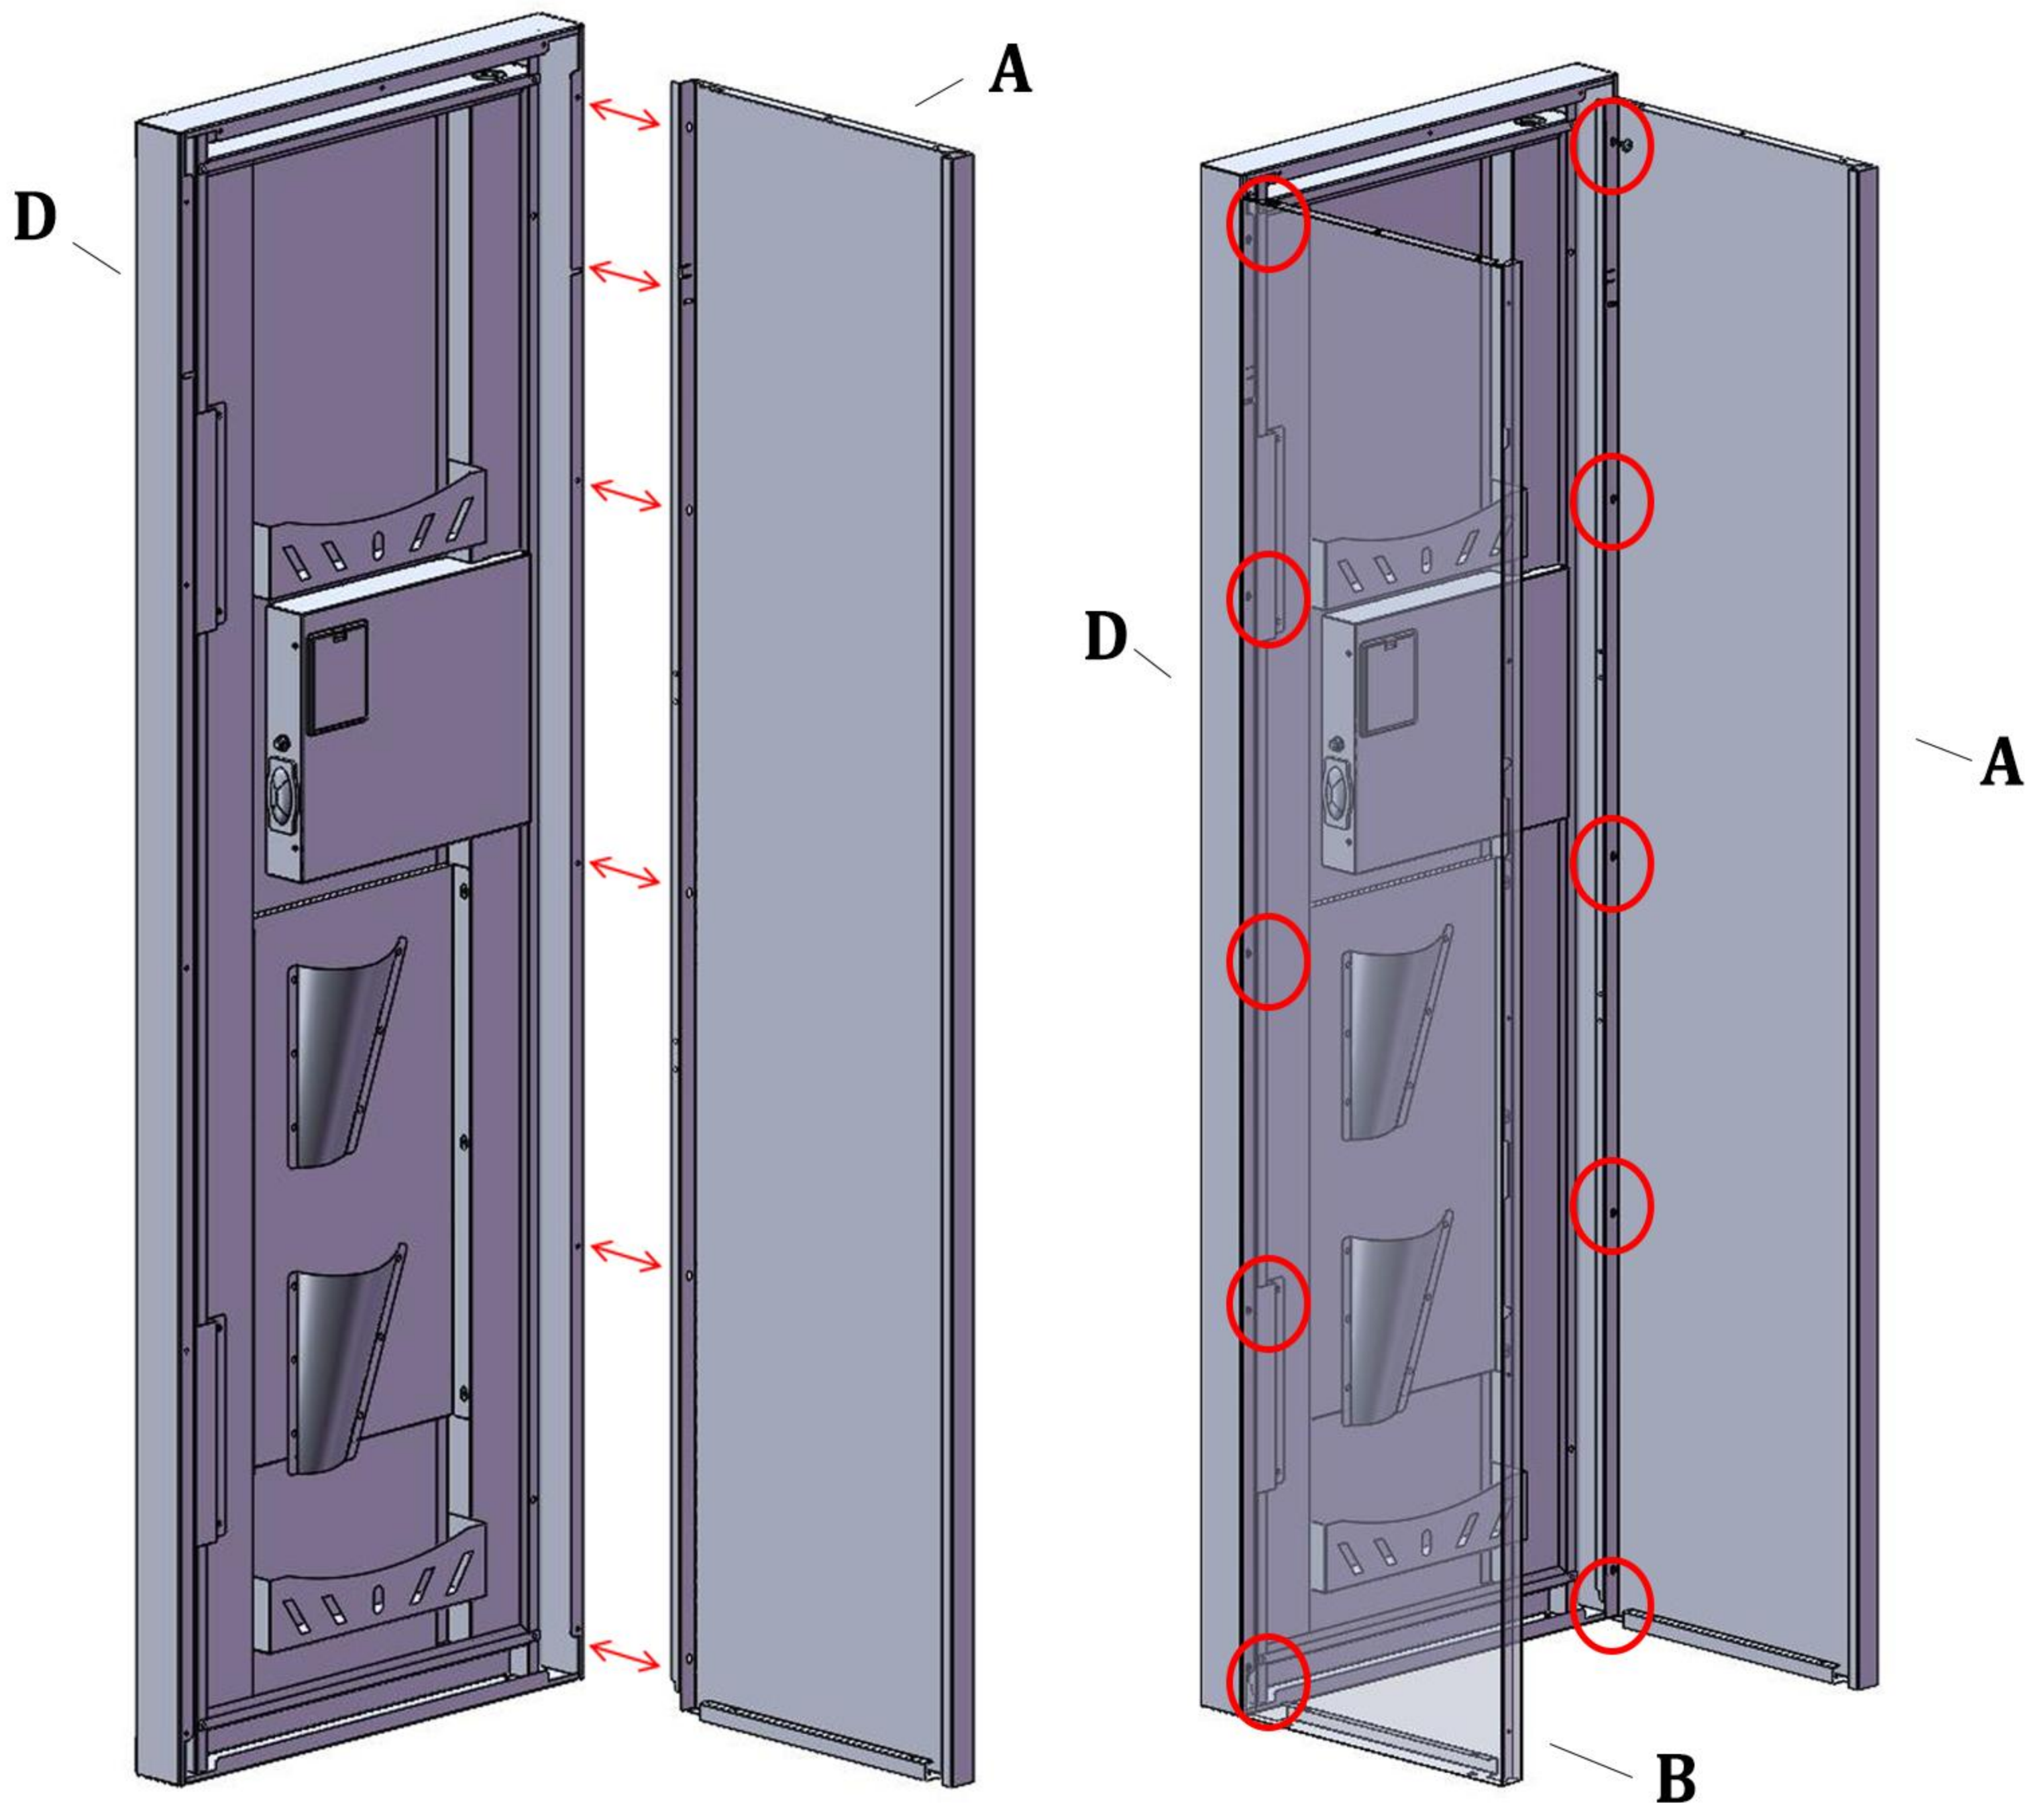




N*10

INSTALLATION INSTRUCTIONS

Step 2:

**Insert component C into the cabinet and push it back, pressing it tightly against A and B,
And use the screwdriver inside the package to turn clockwise N (M5)**

***10 self tapping) connection and tightening;**

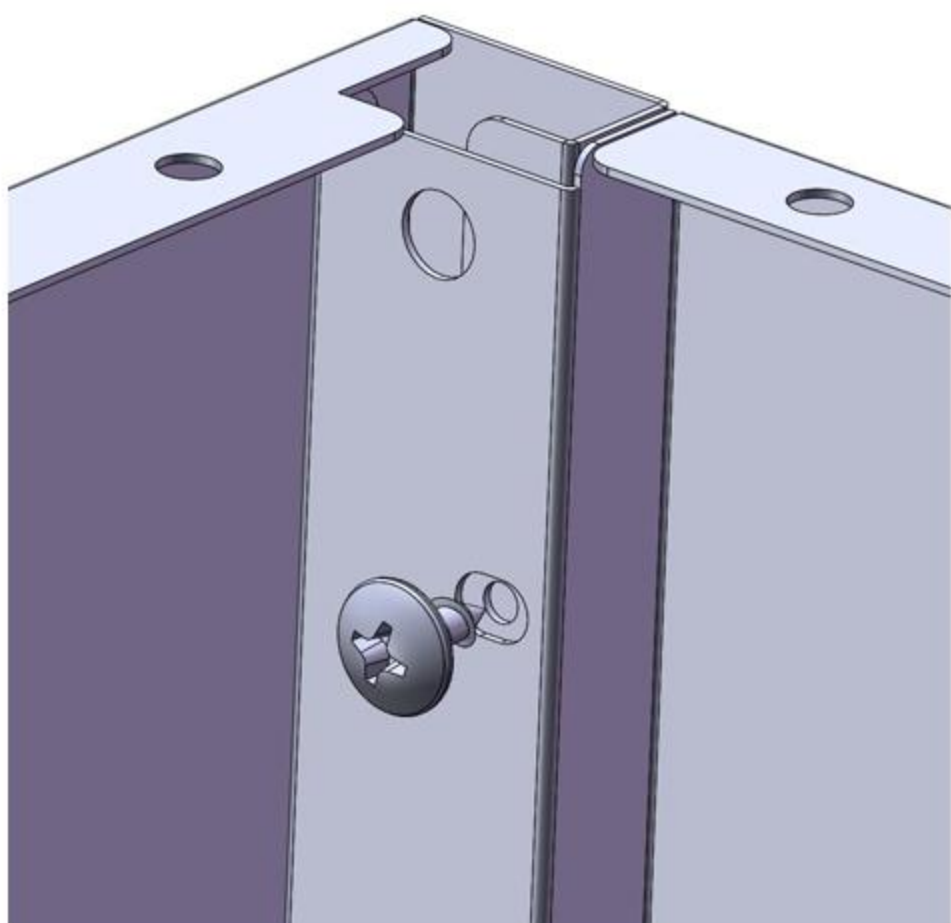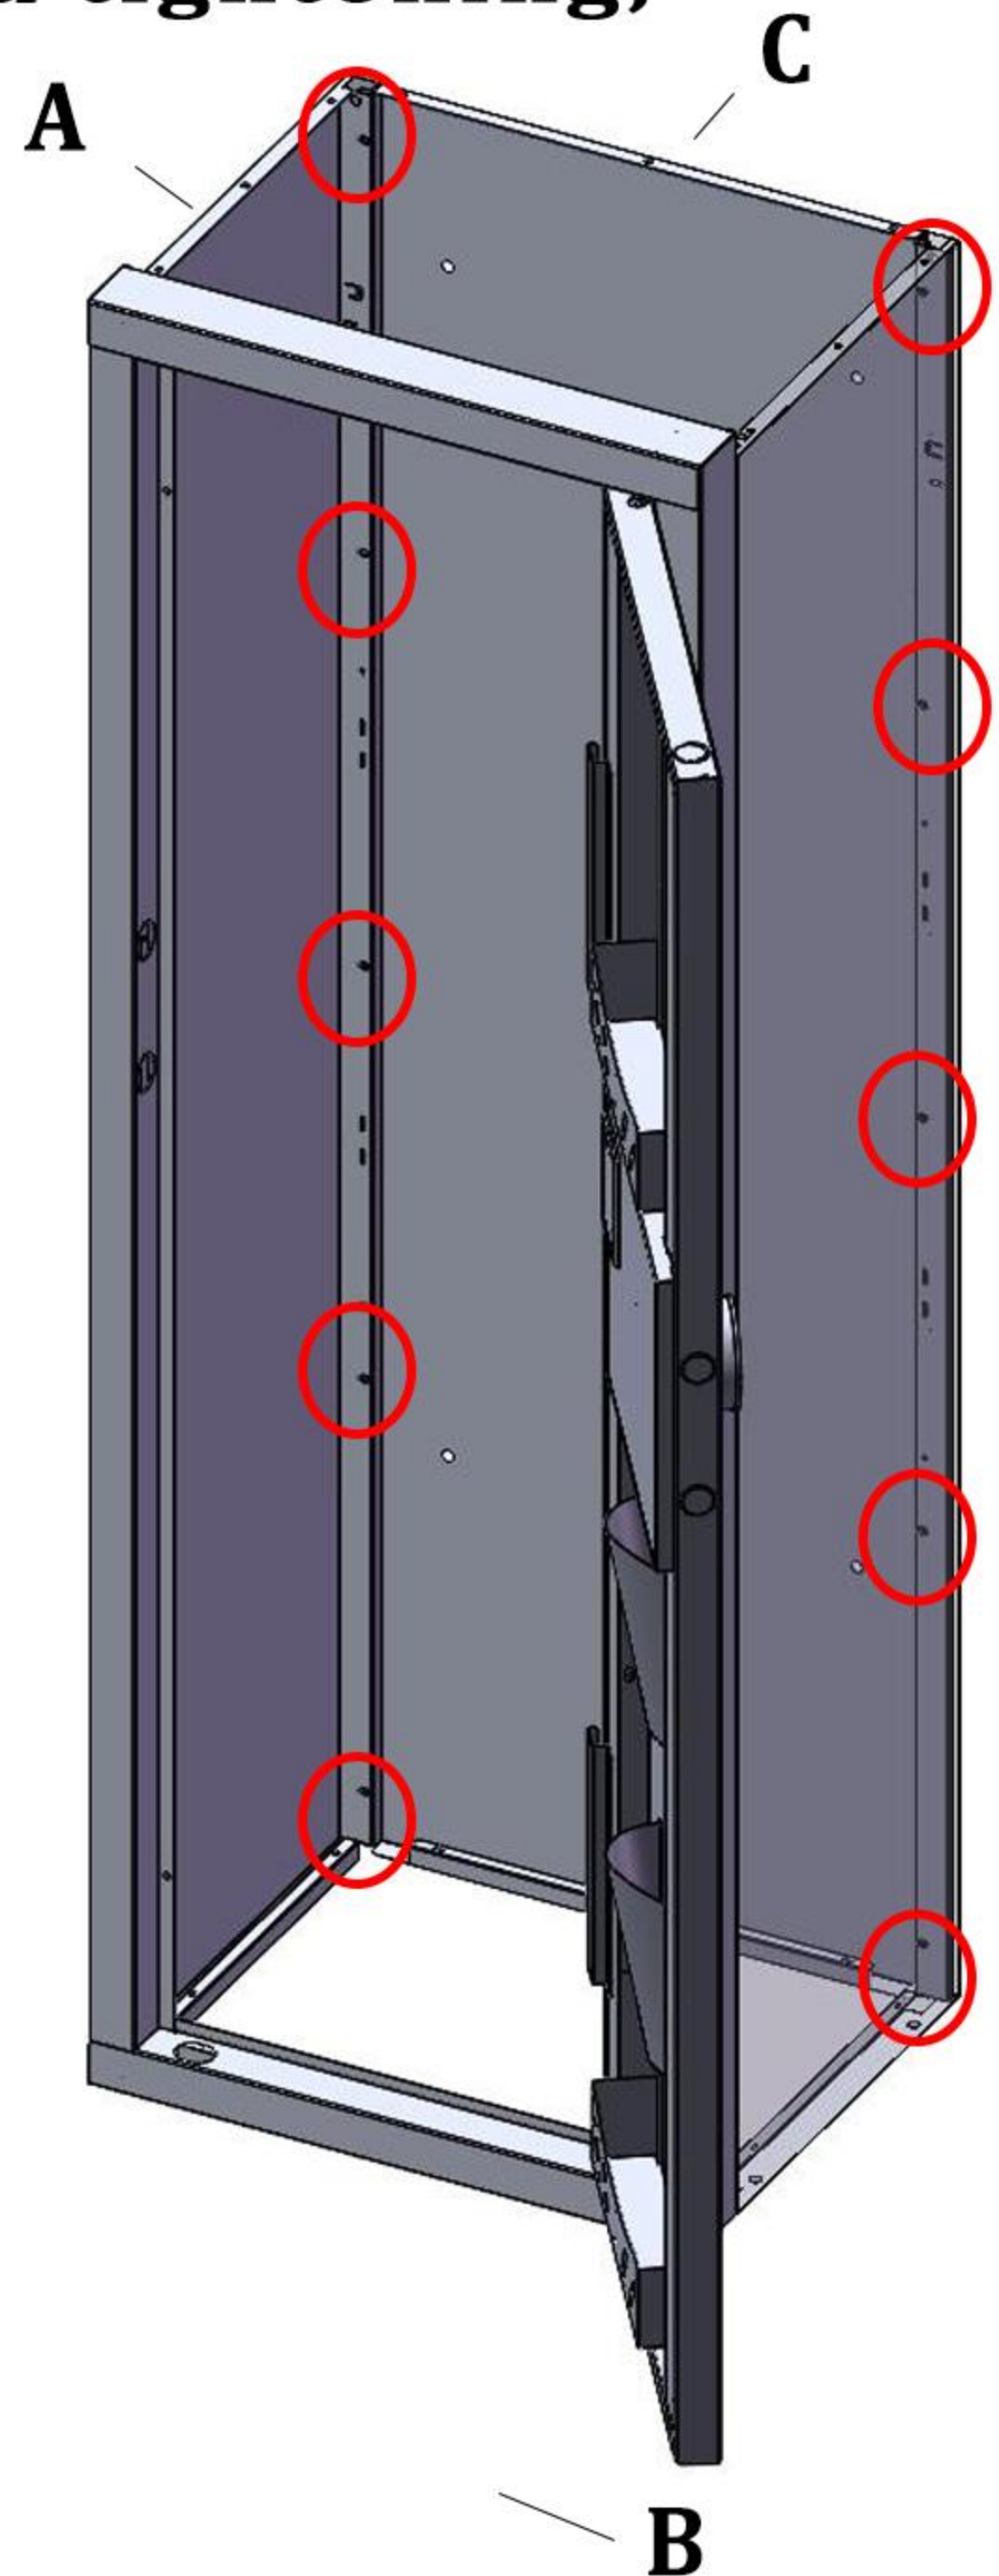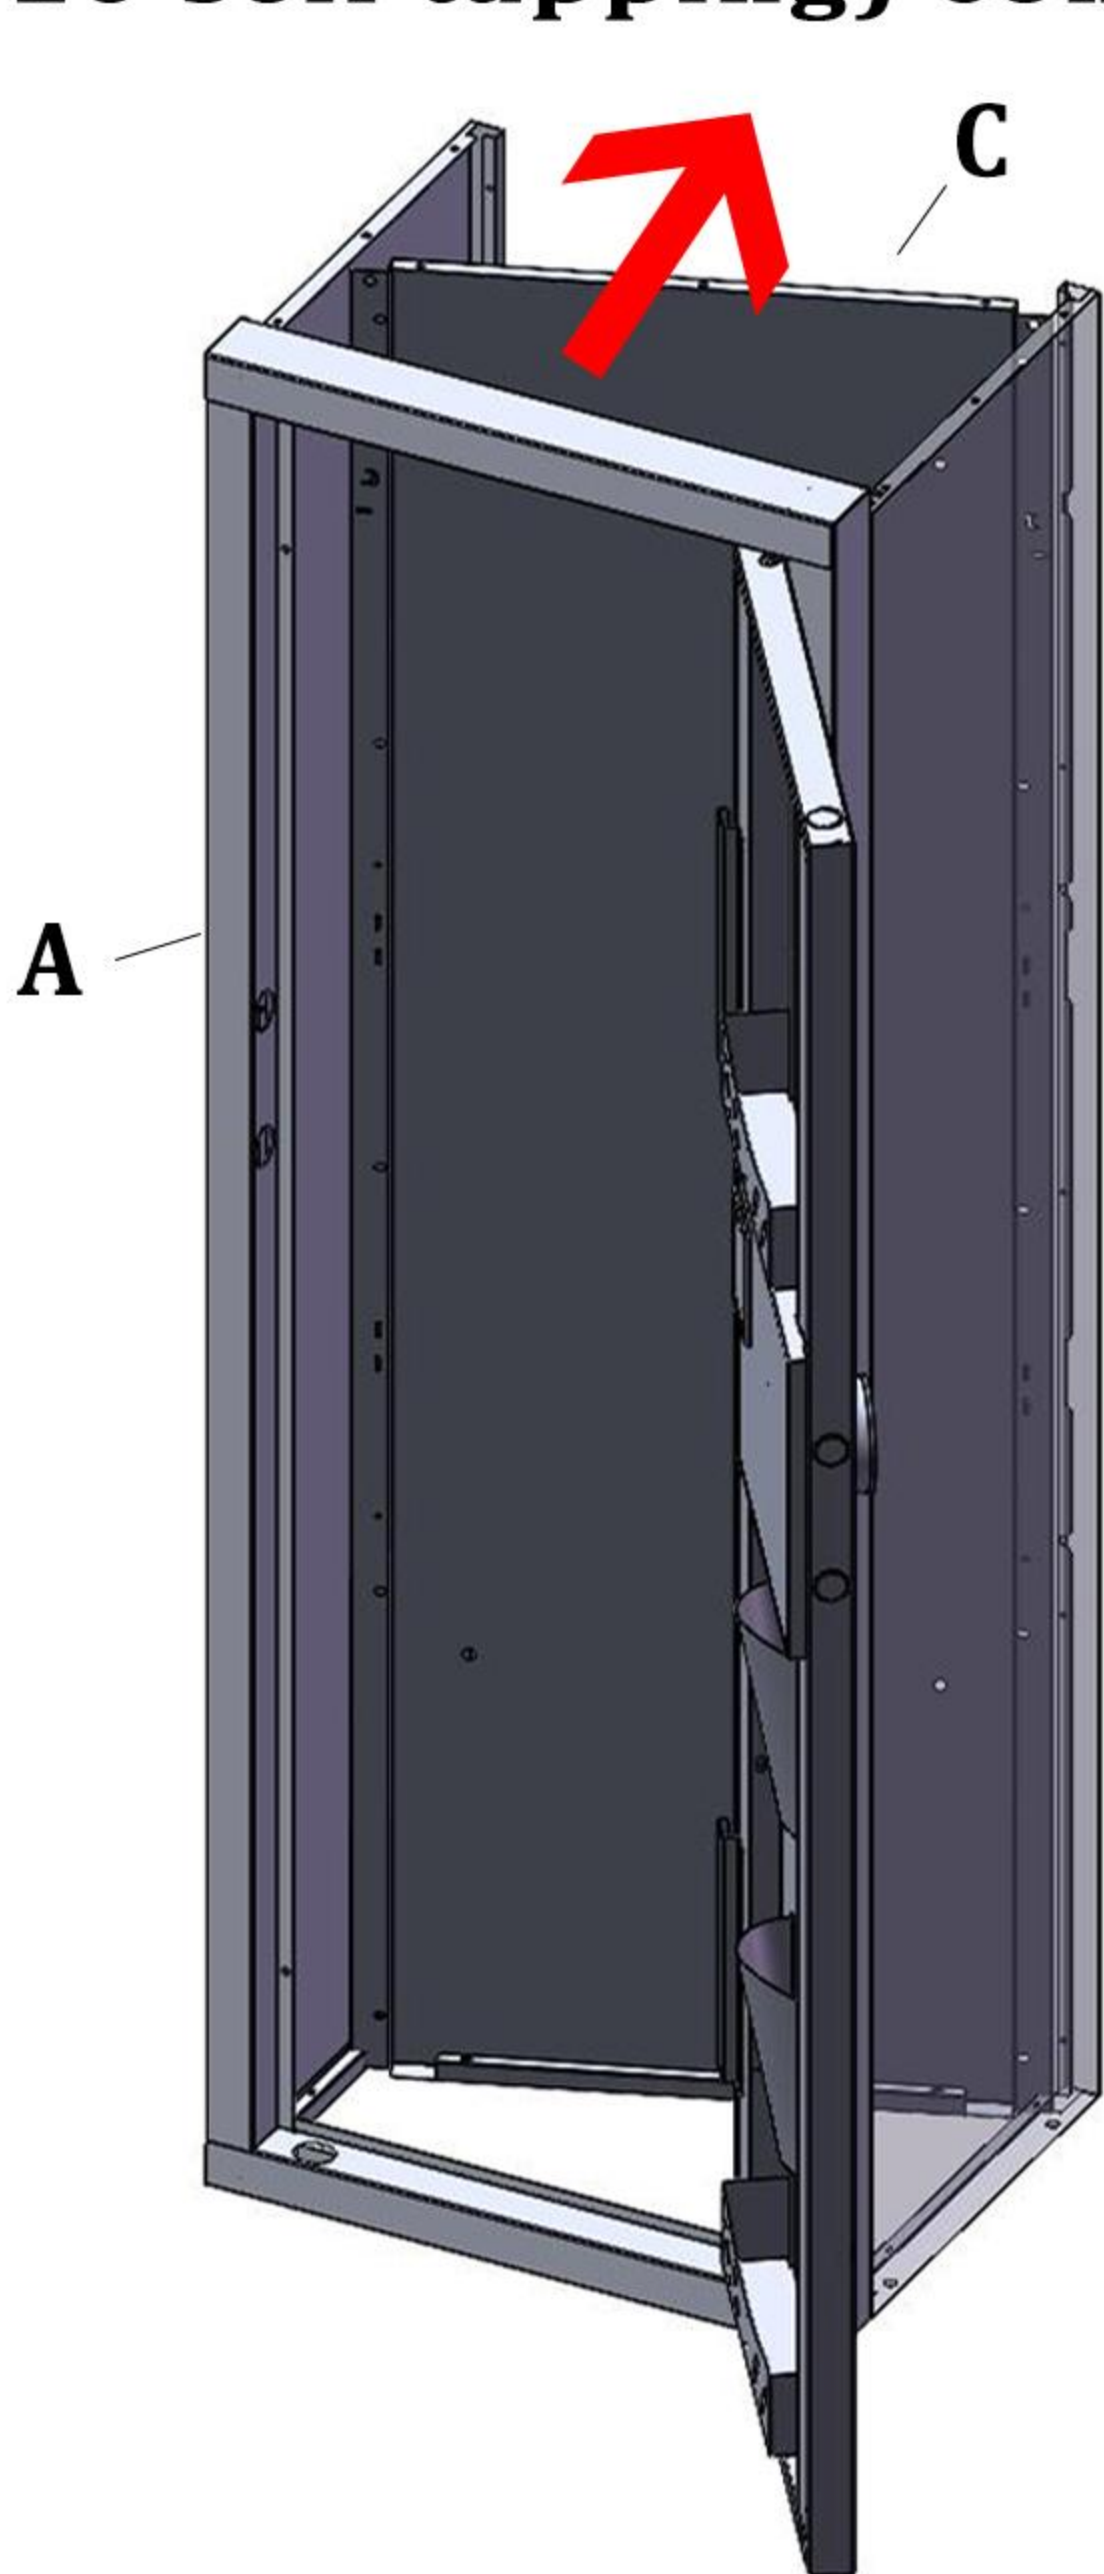


N*10

INSTALLATION INSTRUCTIONS

STEP 3 :

PUSH COMPONENT E (TOP) FORWARD FROM THE BACK, ALIGN WITH THE MOUNTING HOLE,
AND USE N (M5 * 10)

USE A SCREWDRIVER TO SECURELY CONNECT AND TIGHTEN
EACH COMPONENT USING SELF TAPPING SCREWS;


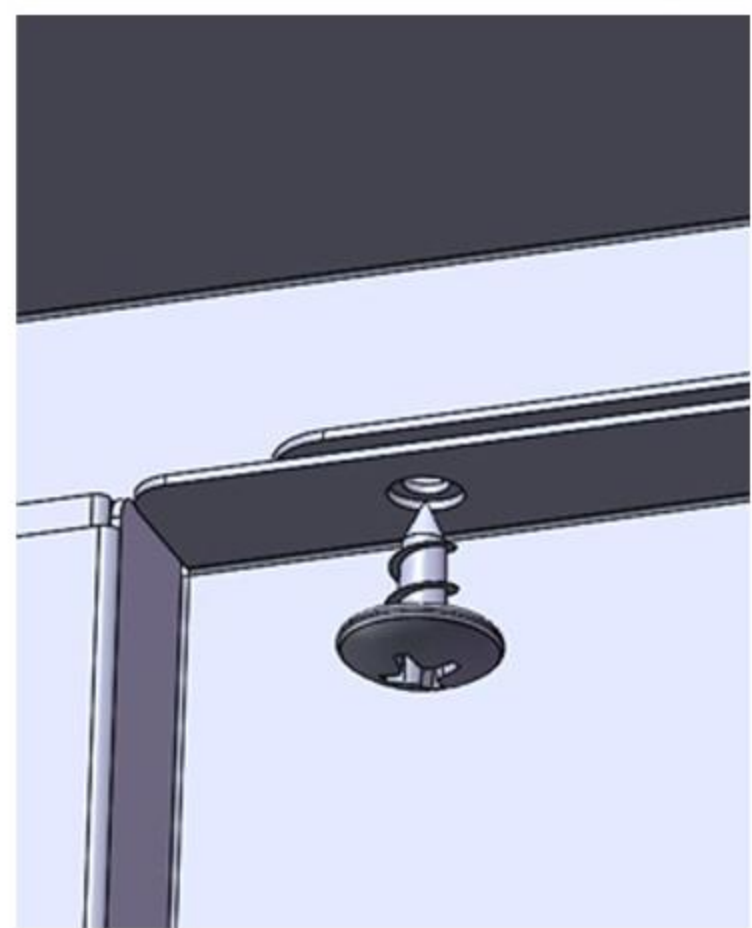


N*12

INSTALLATION INSTRUCTIONS

STEP 4 :

INSERT COMPONENT F INTO THE CABINET, ALIGN THE INSTALLATION
HOLES DOWNWARDS, AND USE N
(M5 * 10 SELF TAPPING) FOR FIXED CONNECTION AND TIGHTENING;

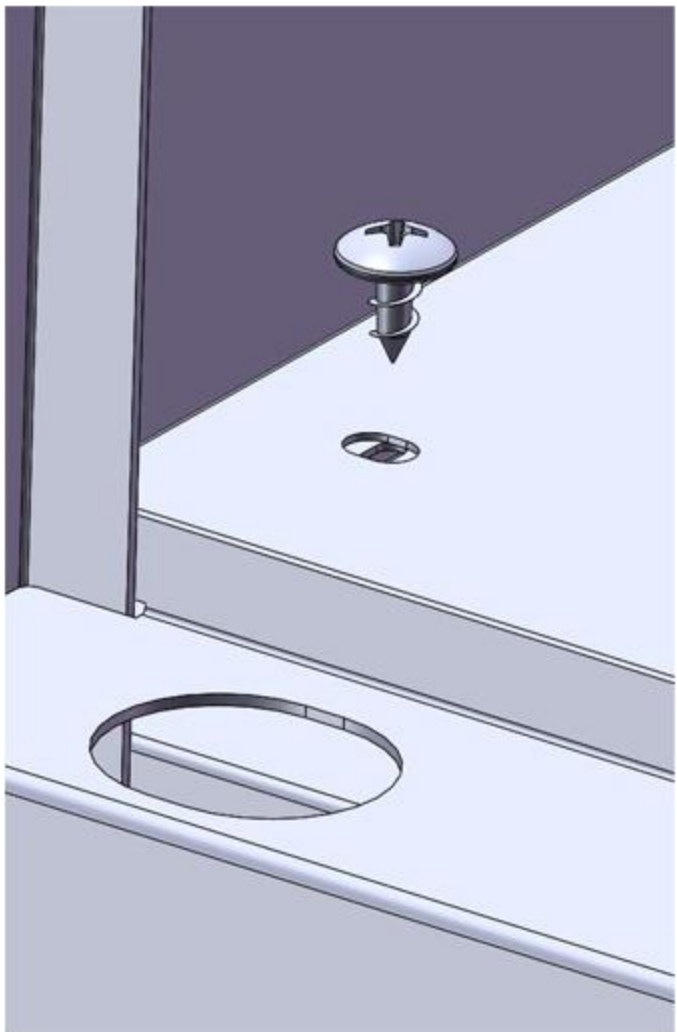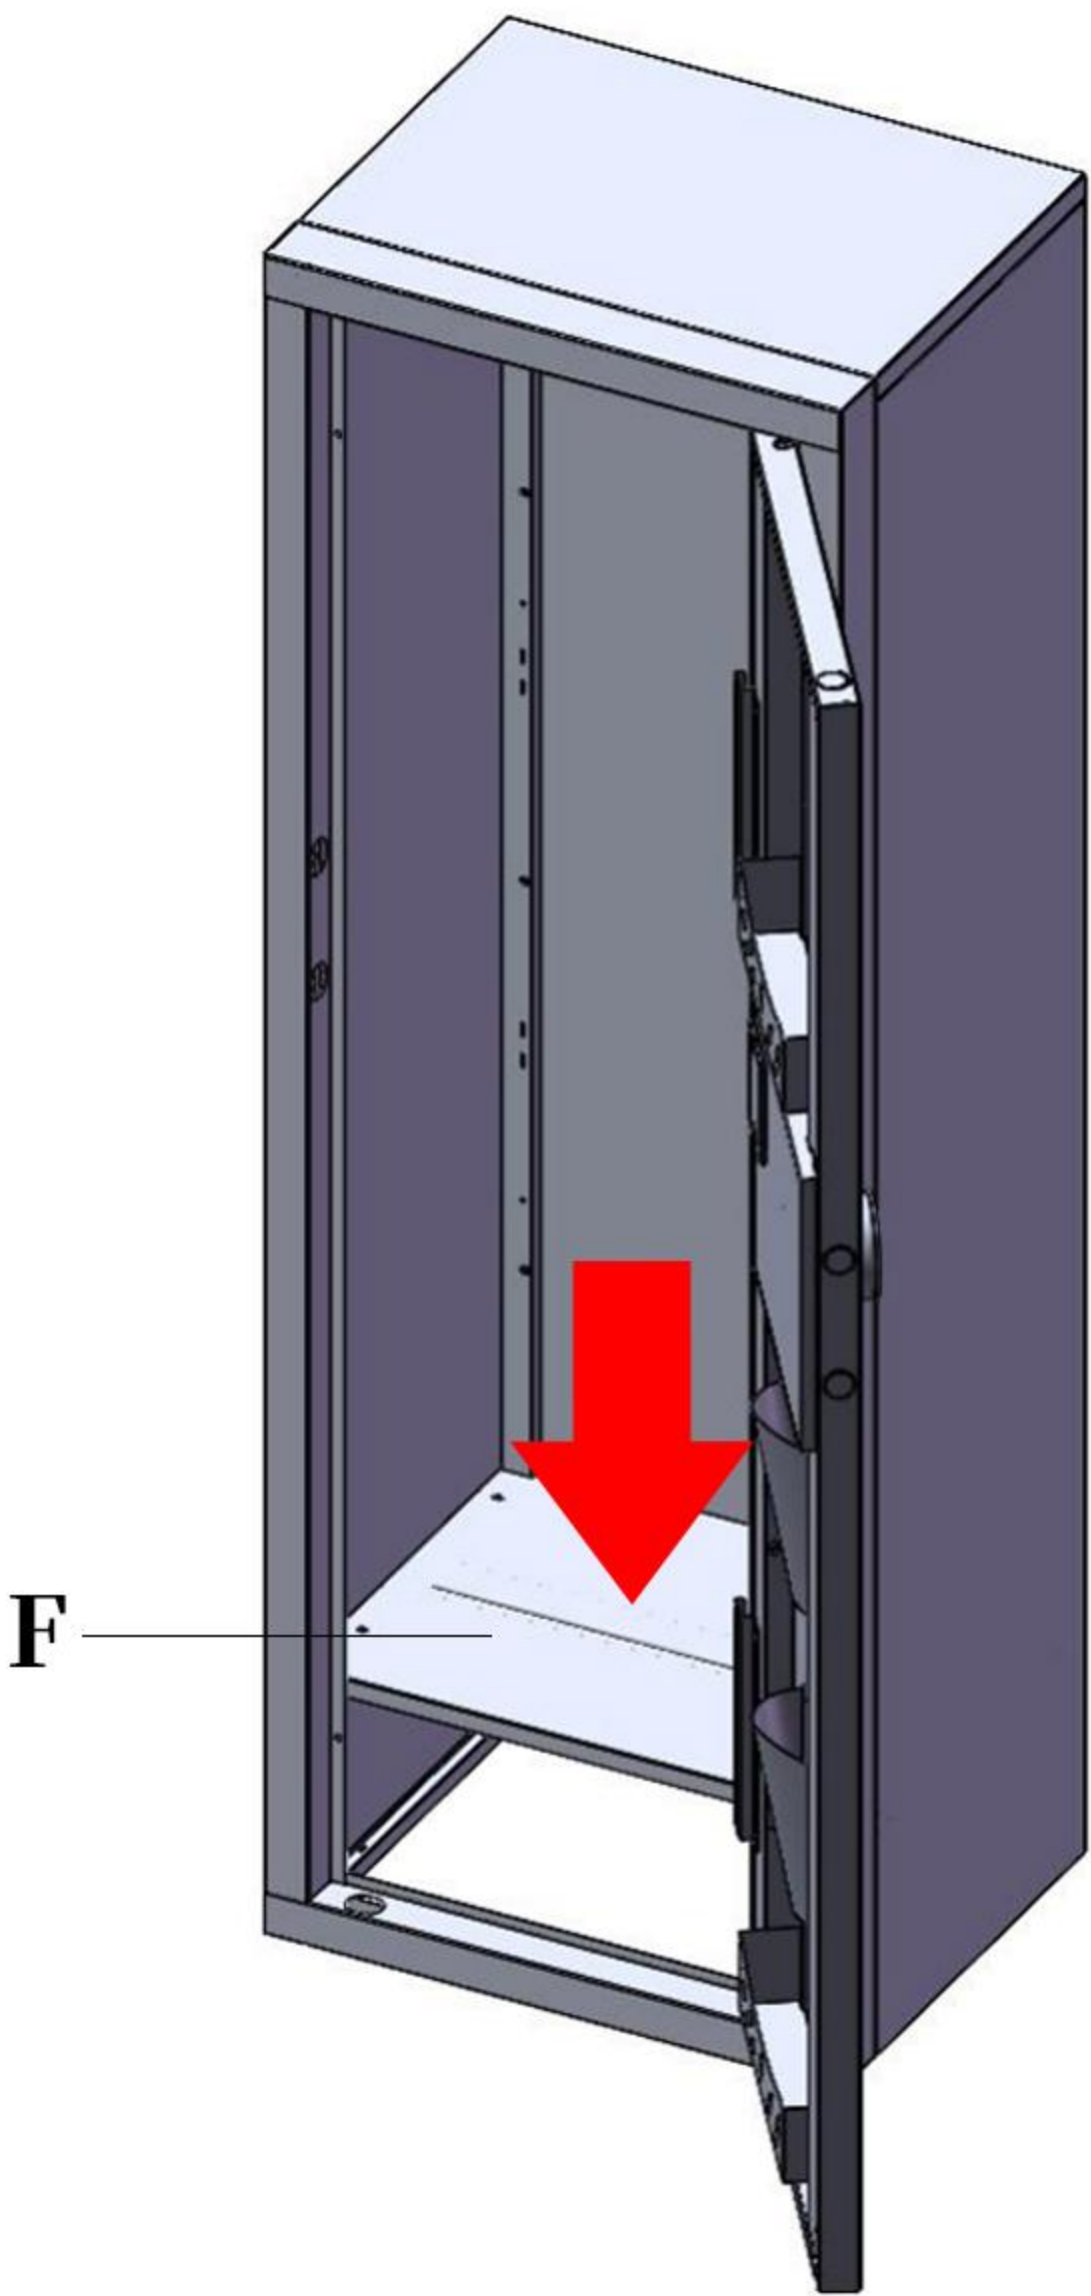




N
9*6

INSTALLATION INSTRUCTIONS

STEP 5 :

INSERT COMPONENT H INTO THE CABINET, PUSH IT CLOSE TO THE BACK,

AND USE N TO SECURE THE CONNECTION

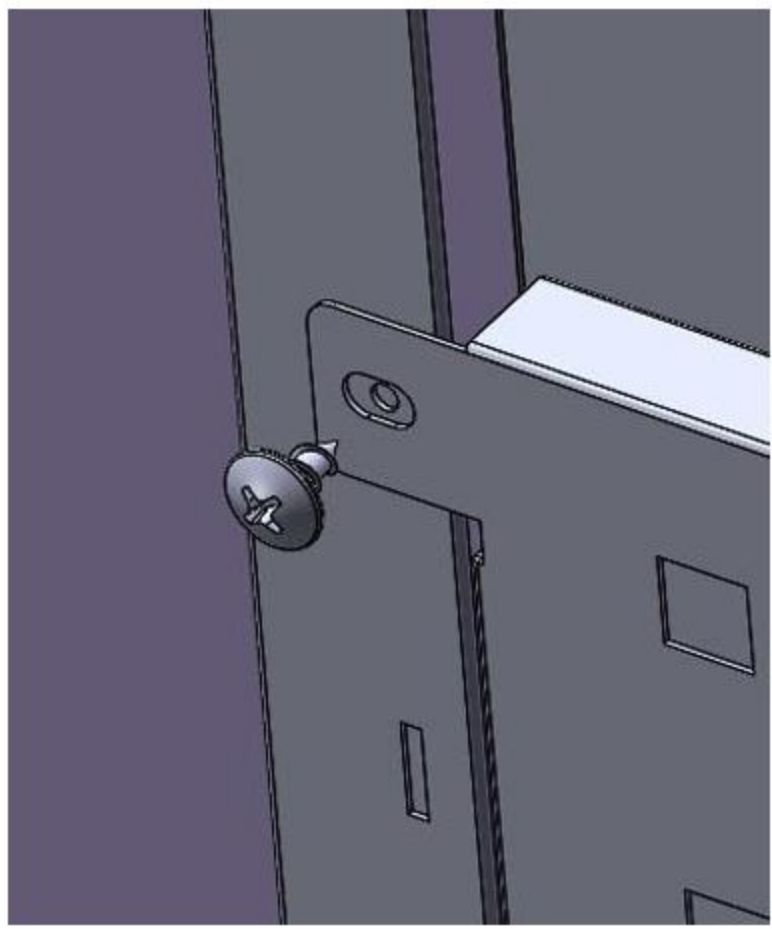
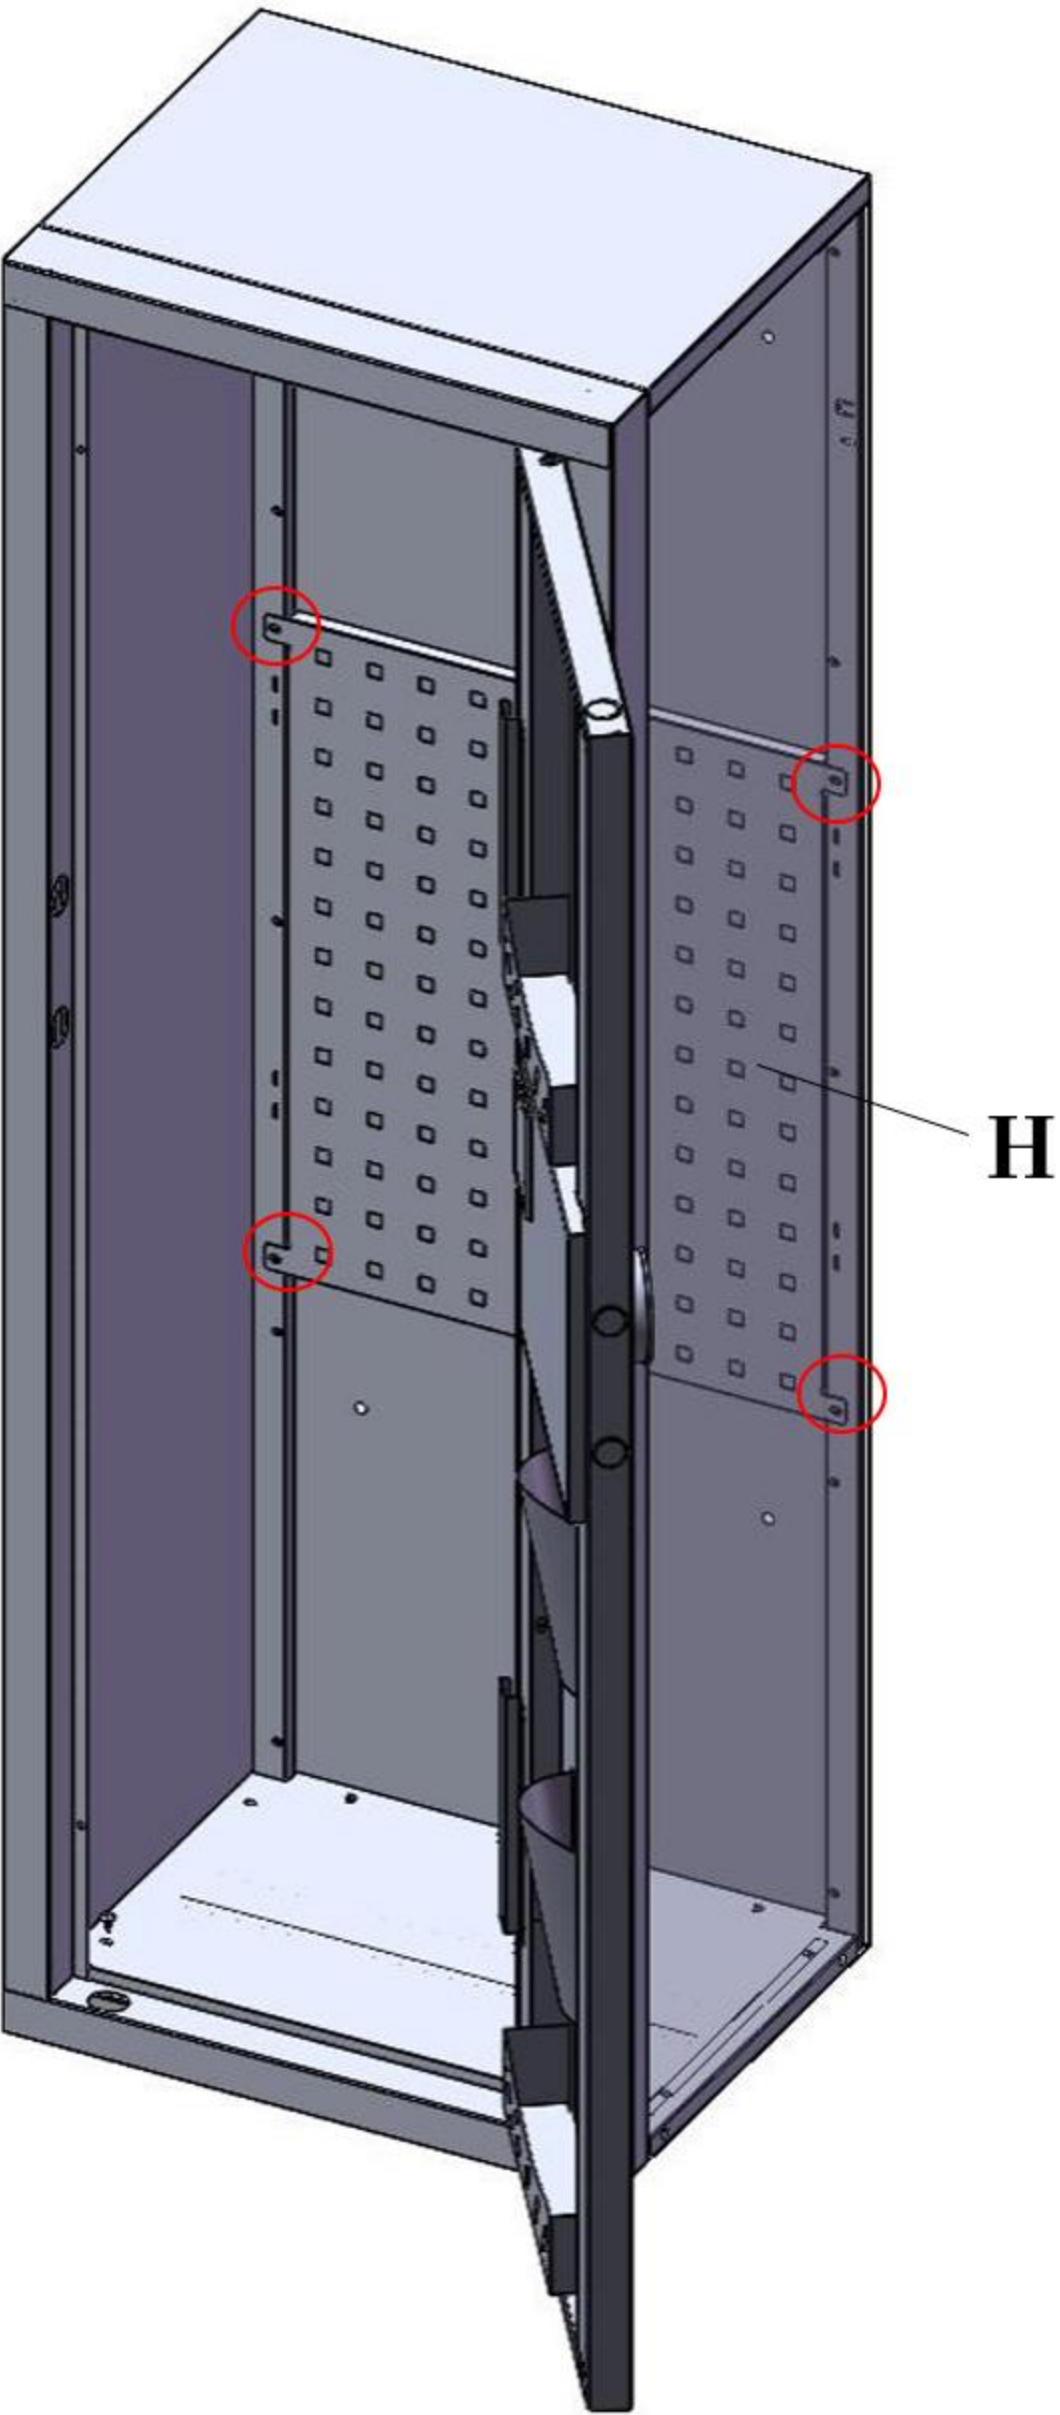
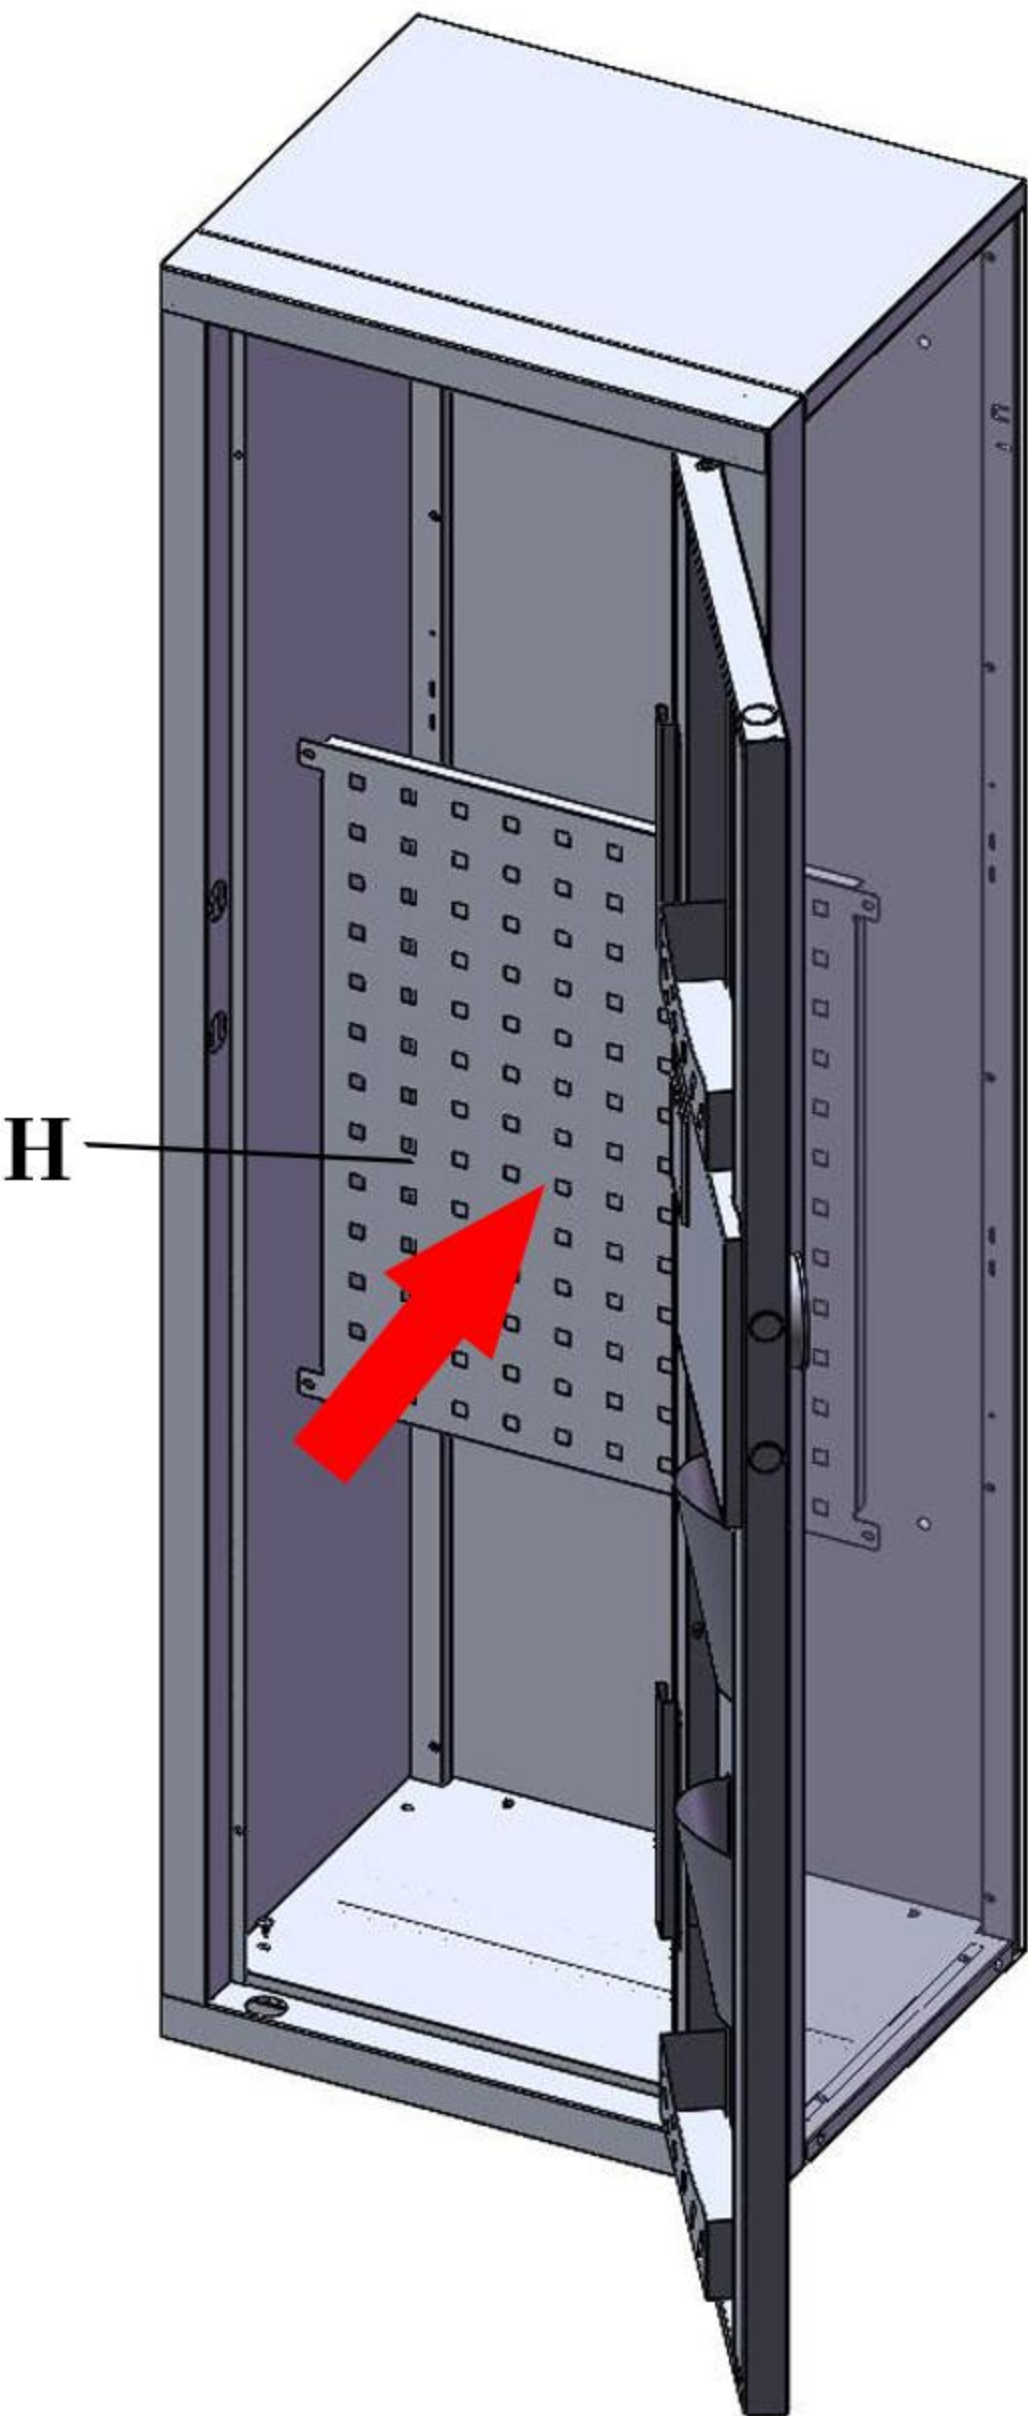


N*4


INSTALLATION INSTRUCTIONS

STEP 6 :

**INSERT J (ONE ON EACH SIDE) INTO THE RESERVED HOLE AT THE BACK AS SHOWN IN THE PICTURE, AND PLACE IT IN THE FRONT
ALIGN THE INSTALLATION HOLES IN FRONT OF THE SIDE PANEL
HORIZONTALLY, USE N * 4 FIXED CONNECTIONS, AND INSTALL THEM
LOADING STOCK**

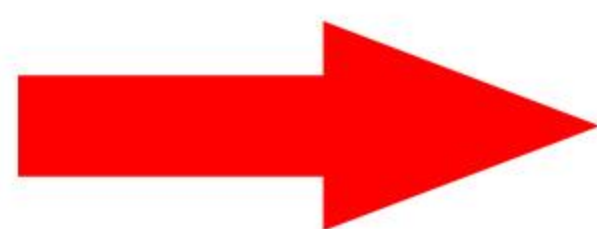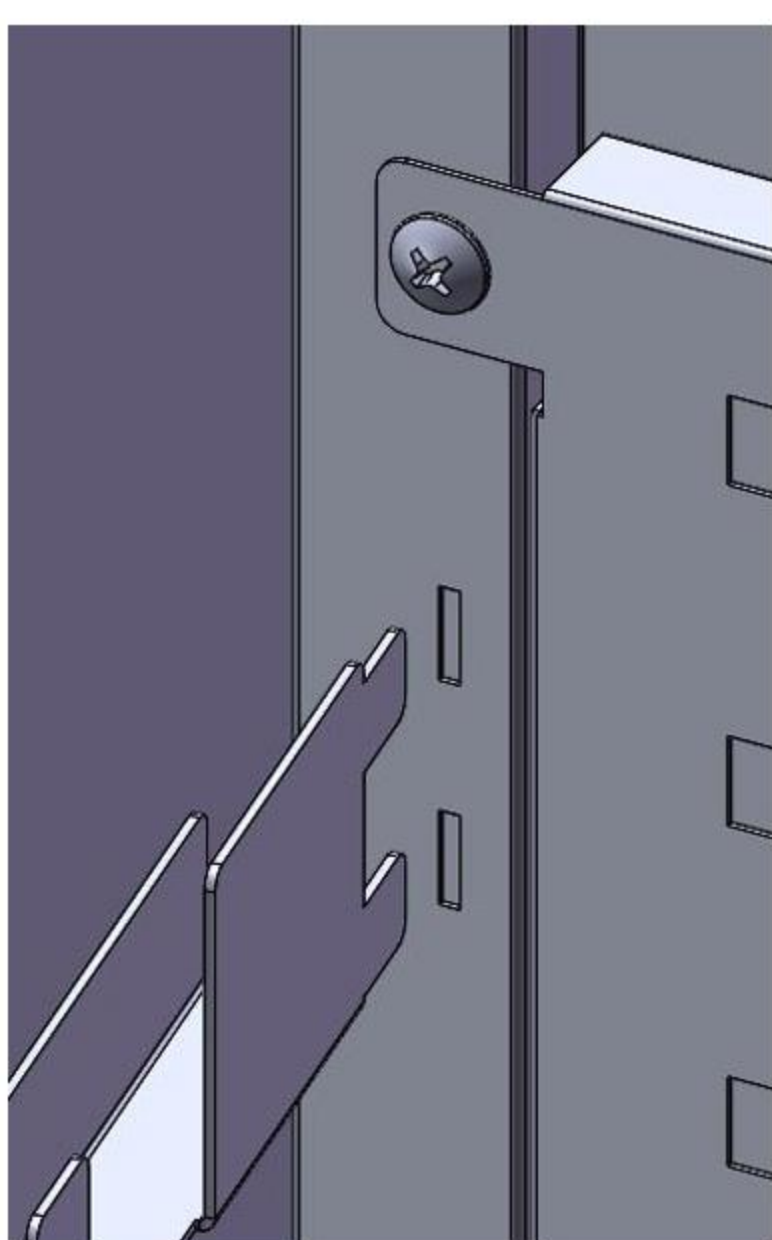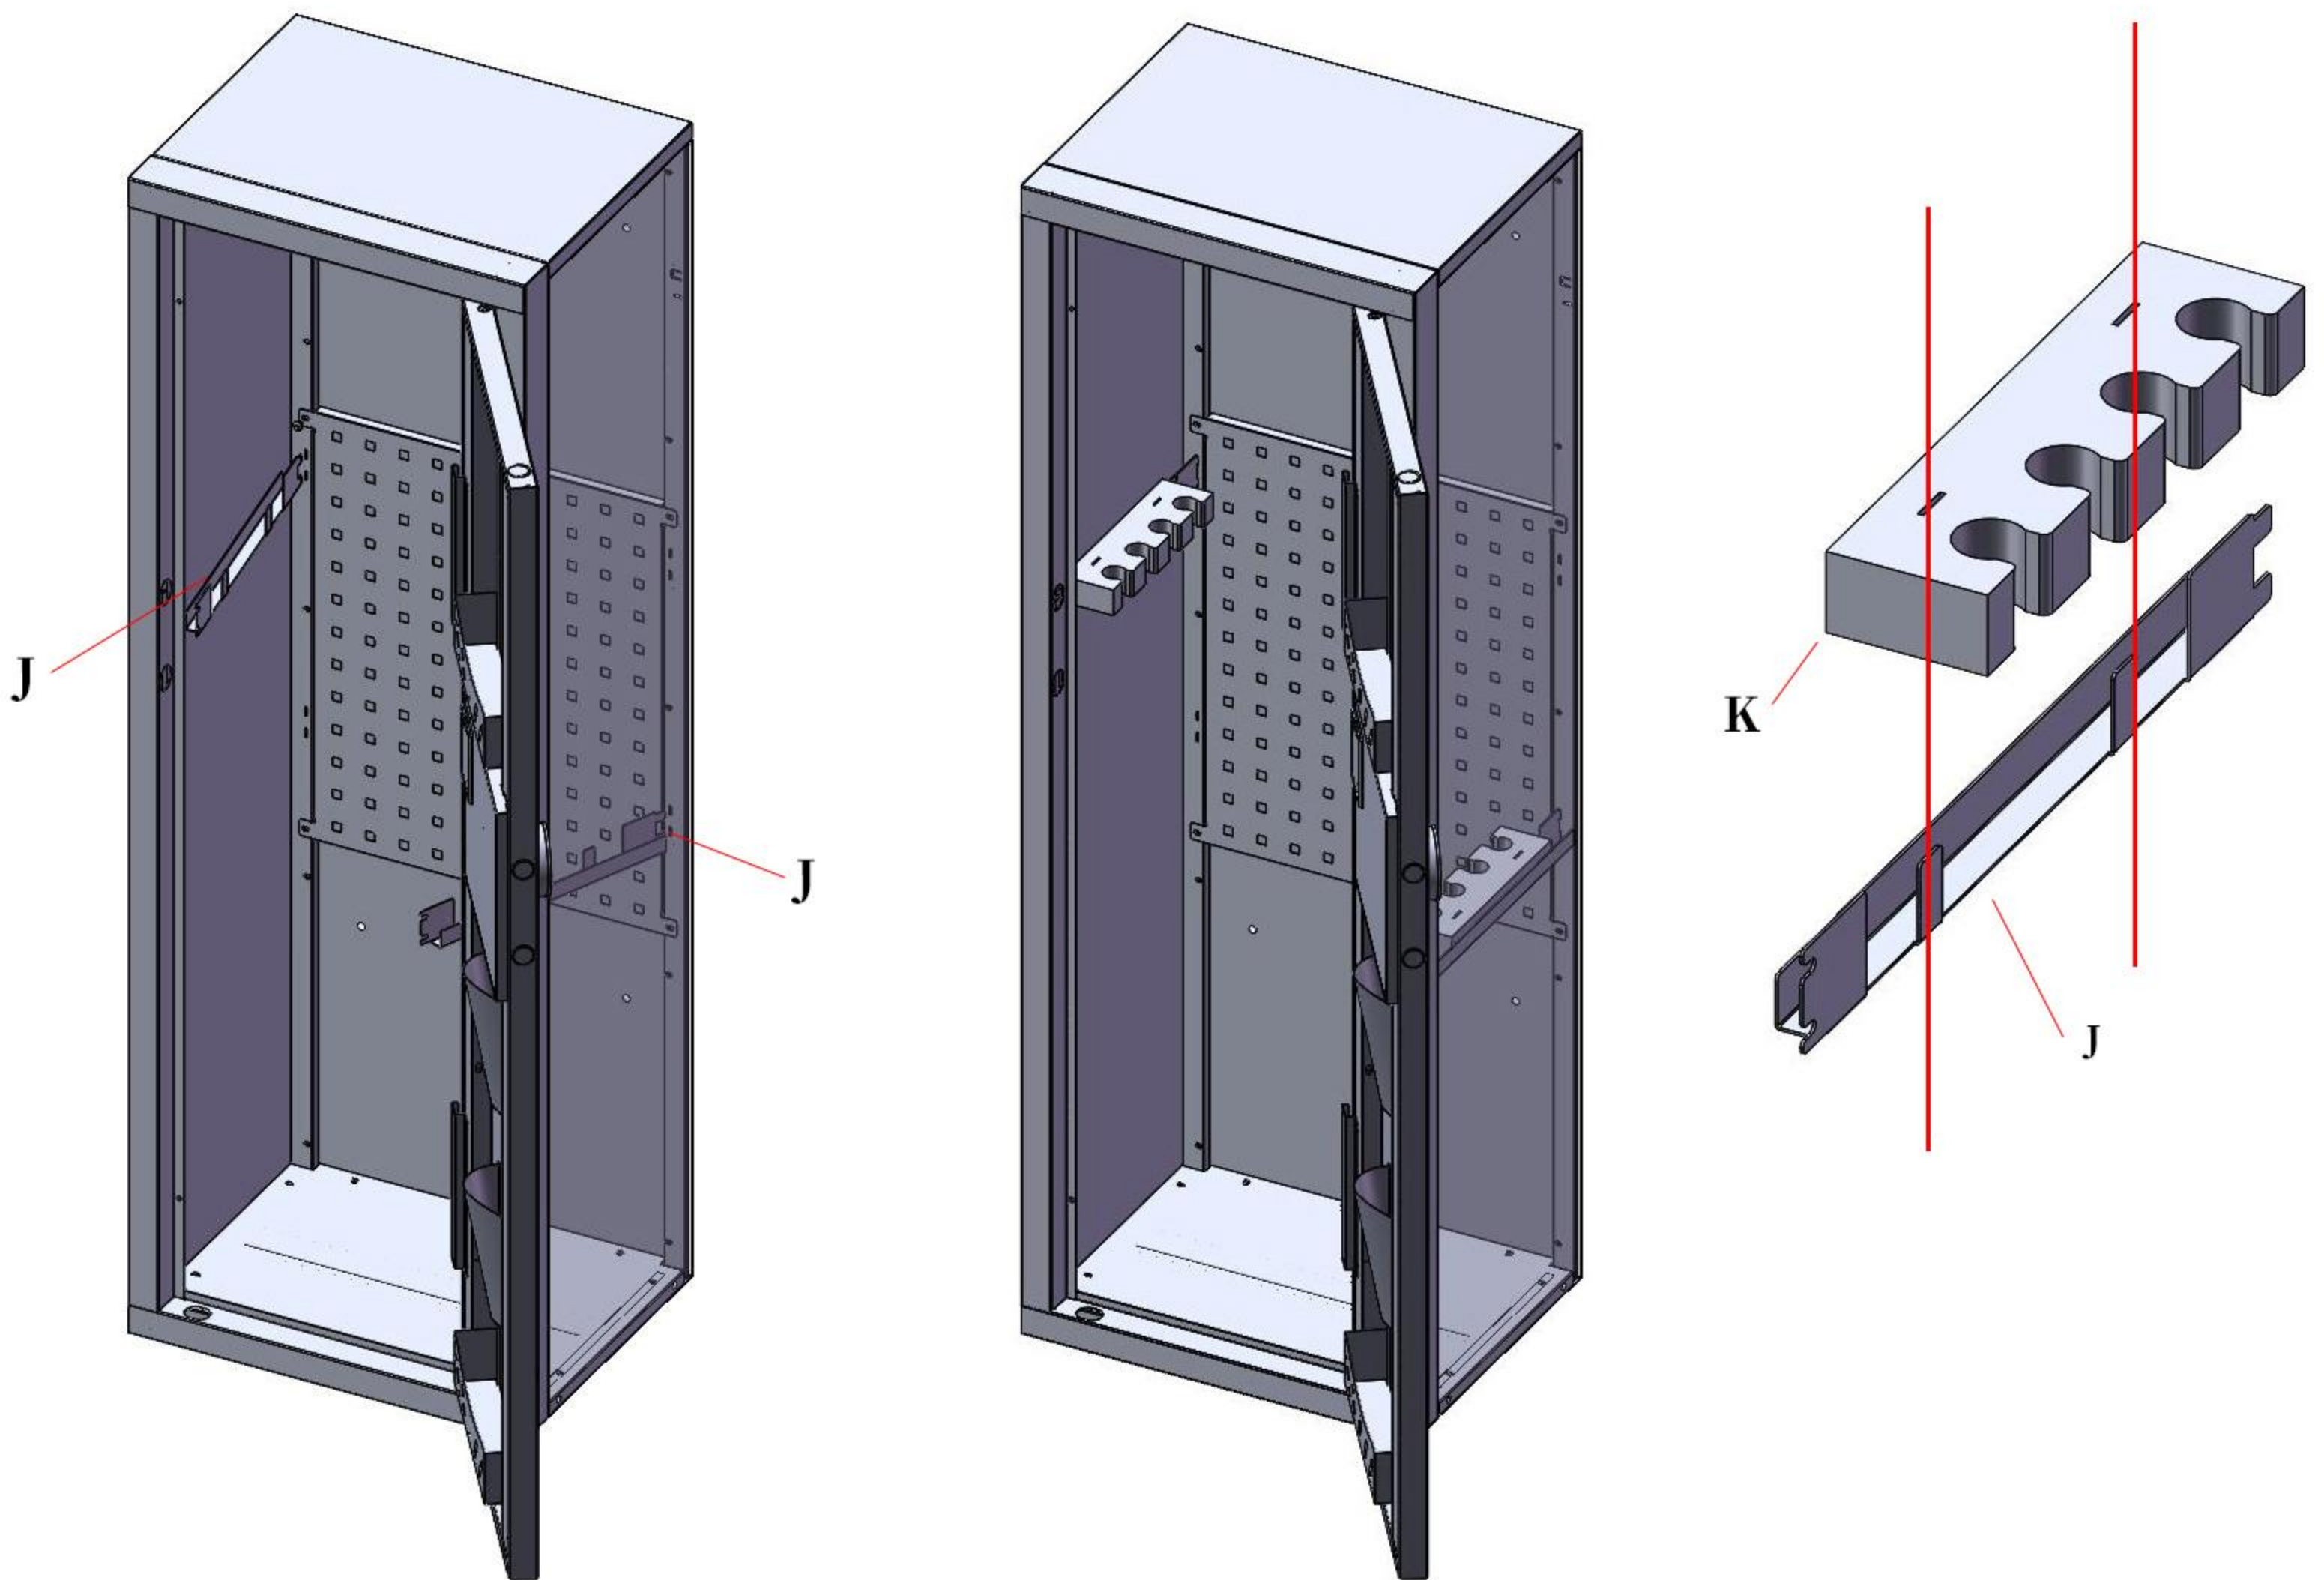


N*4

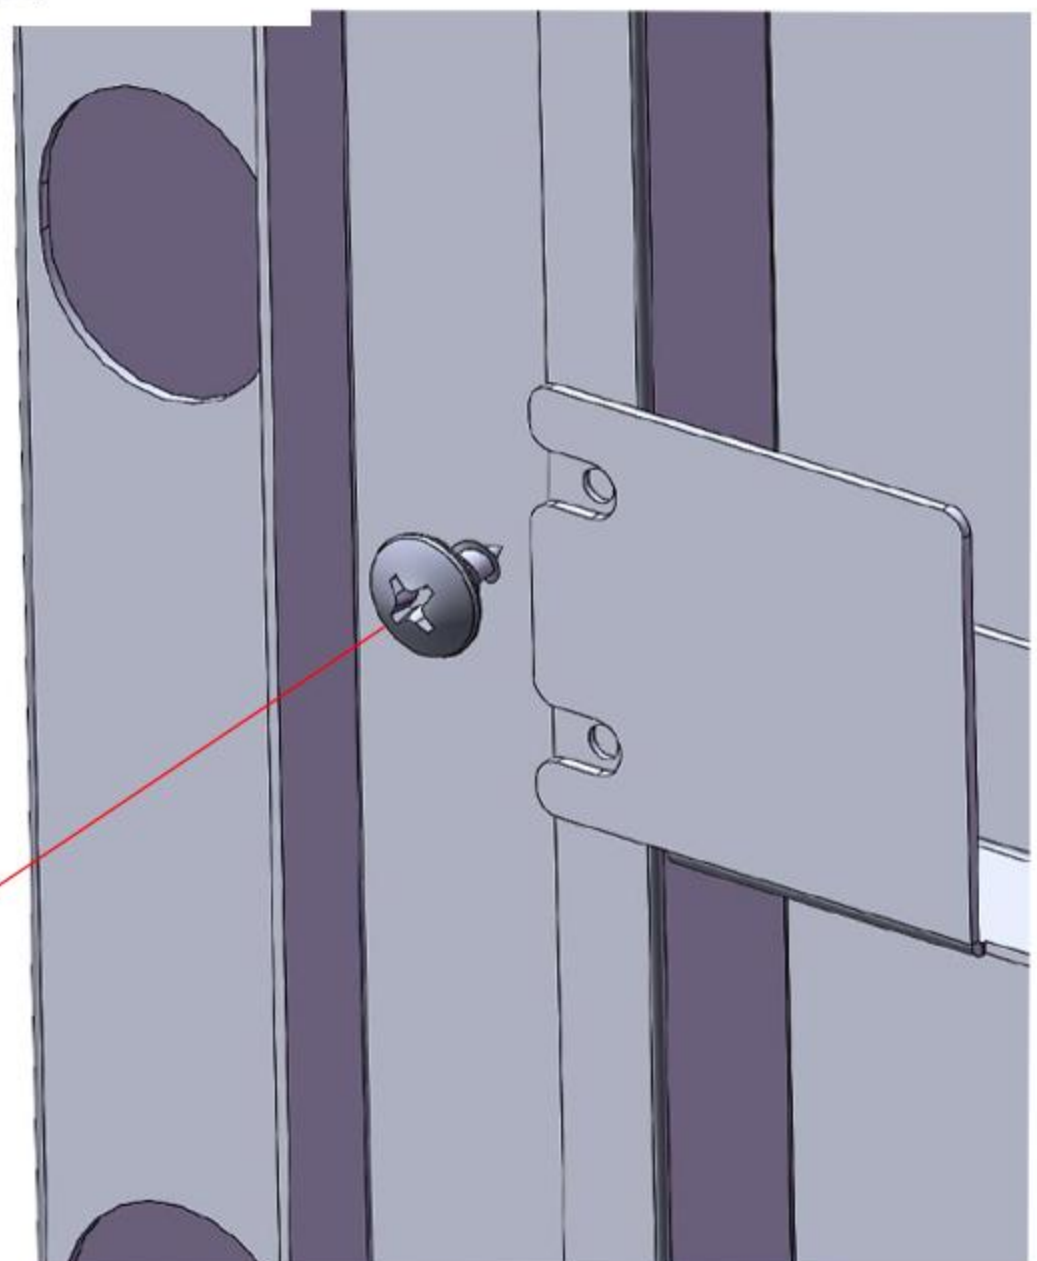

INSTALLATION INSTRUCTIONS

STEP 7:


INSTALL COMPONENT O IN PARALLEL POSITIONS AROUND THE CABINET AS SHOWN IN THE FIGURE, THEN PLACE COMPONENT G INSIDE THE CABINET AND PLACE IT PARALLEL TO THE PLANE OF COMPONENT O THEN TWIST THE COMPRESSION PLATE TO COMPRESS G

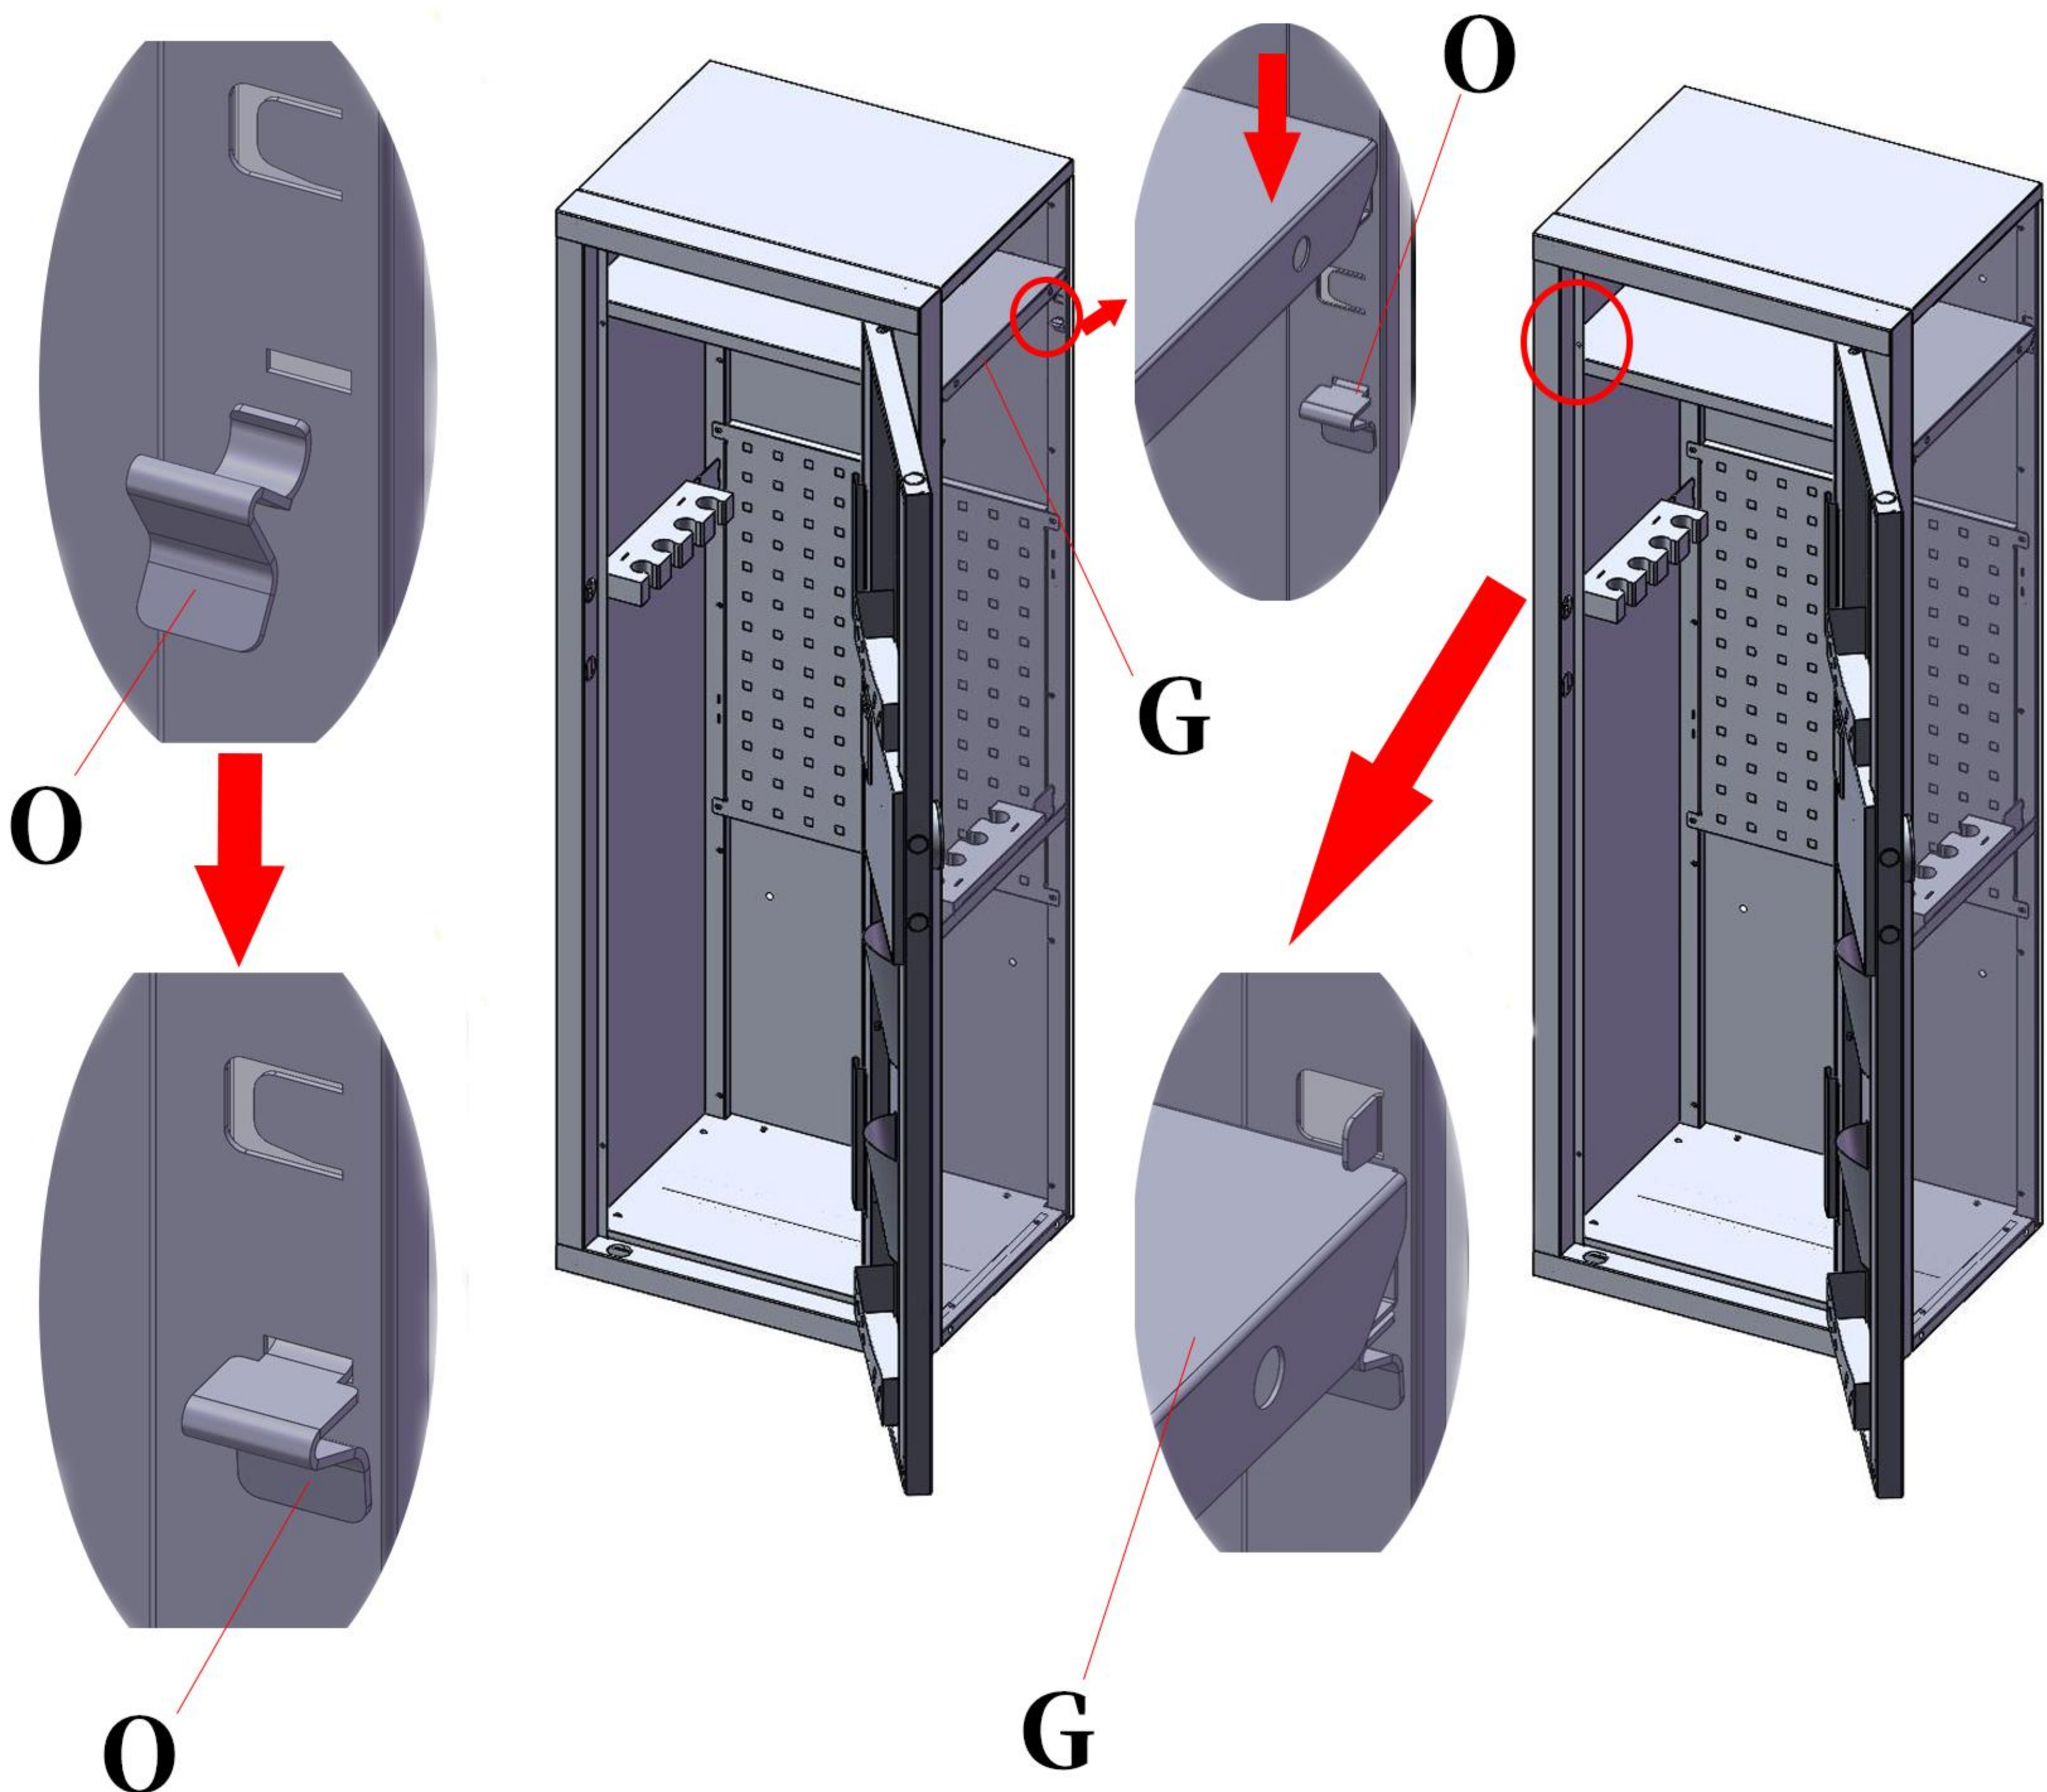



INSTALLATION INSTRUCTIONS

STEP 8 :

**ASSEMBLE COMPONENTS K AND I TOGETHER AS SHOWN
IN THE DIAGRAM, THEN
HANG IT IN A SUITABLE POSITION ON THE BACK
MESH BOARD H AS SHOWN IN THE FIGURE,
AND LAY THE FELT, INSTALLATION COMPLETED**

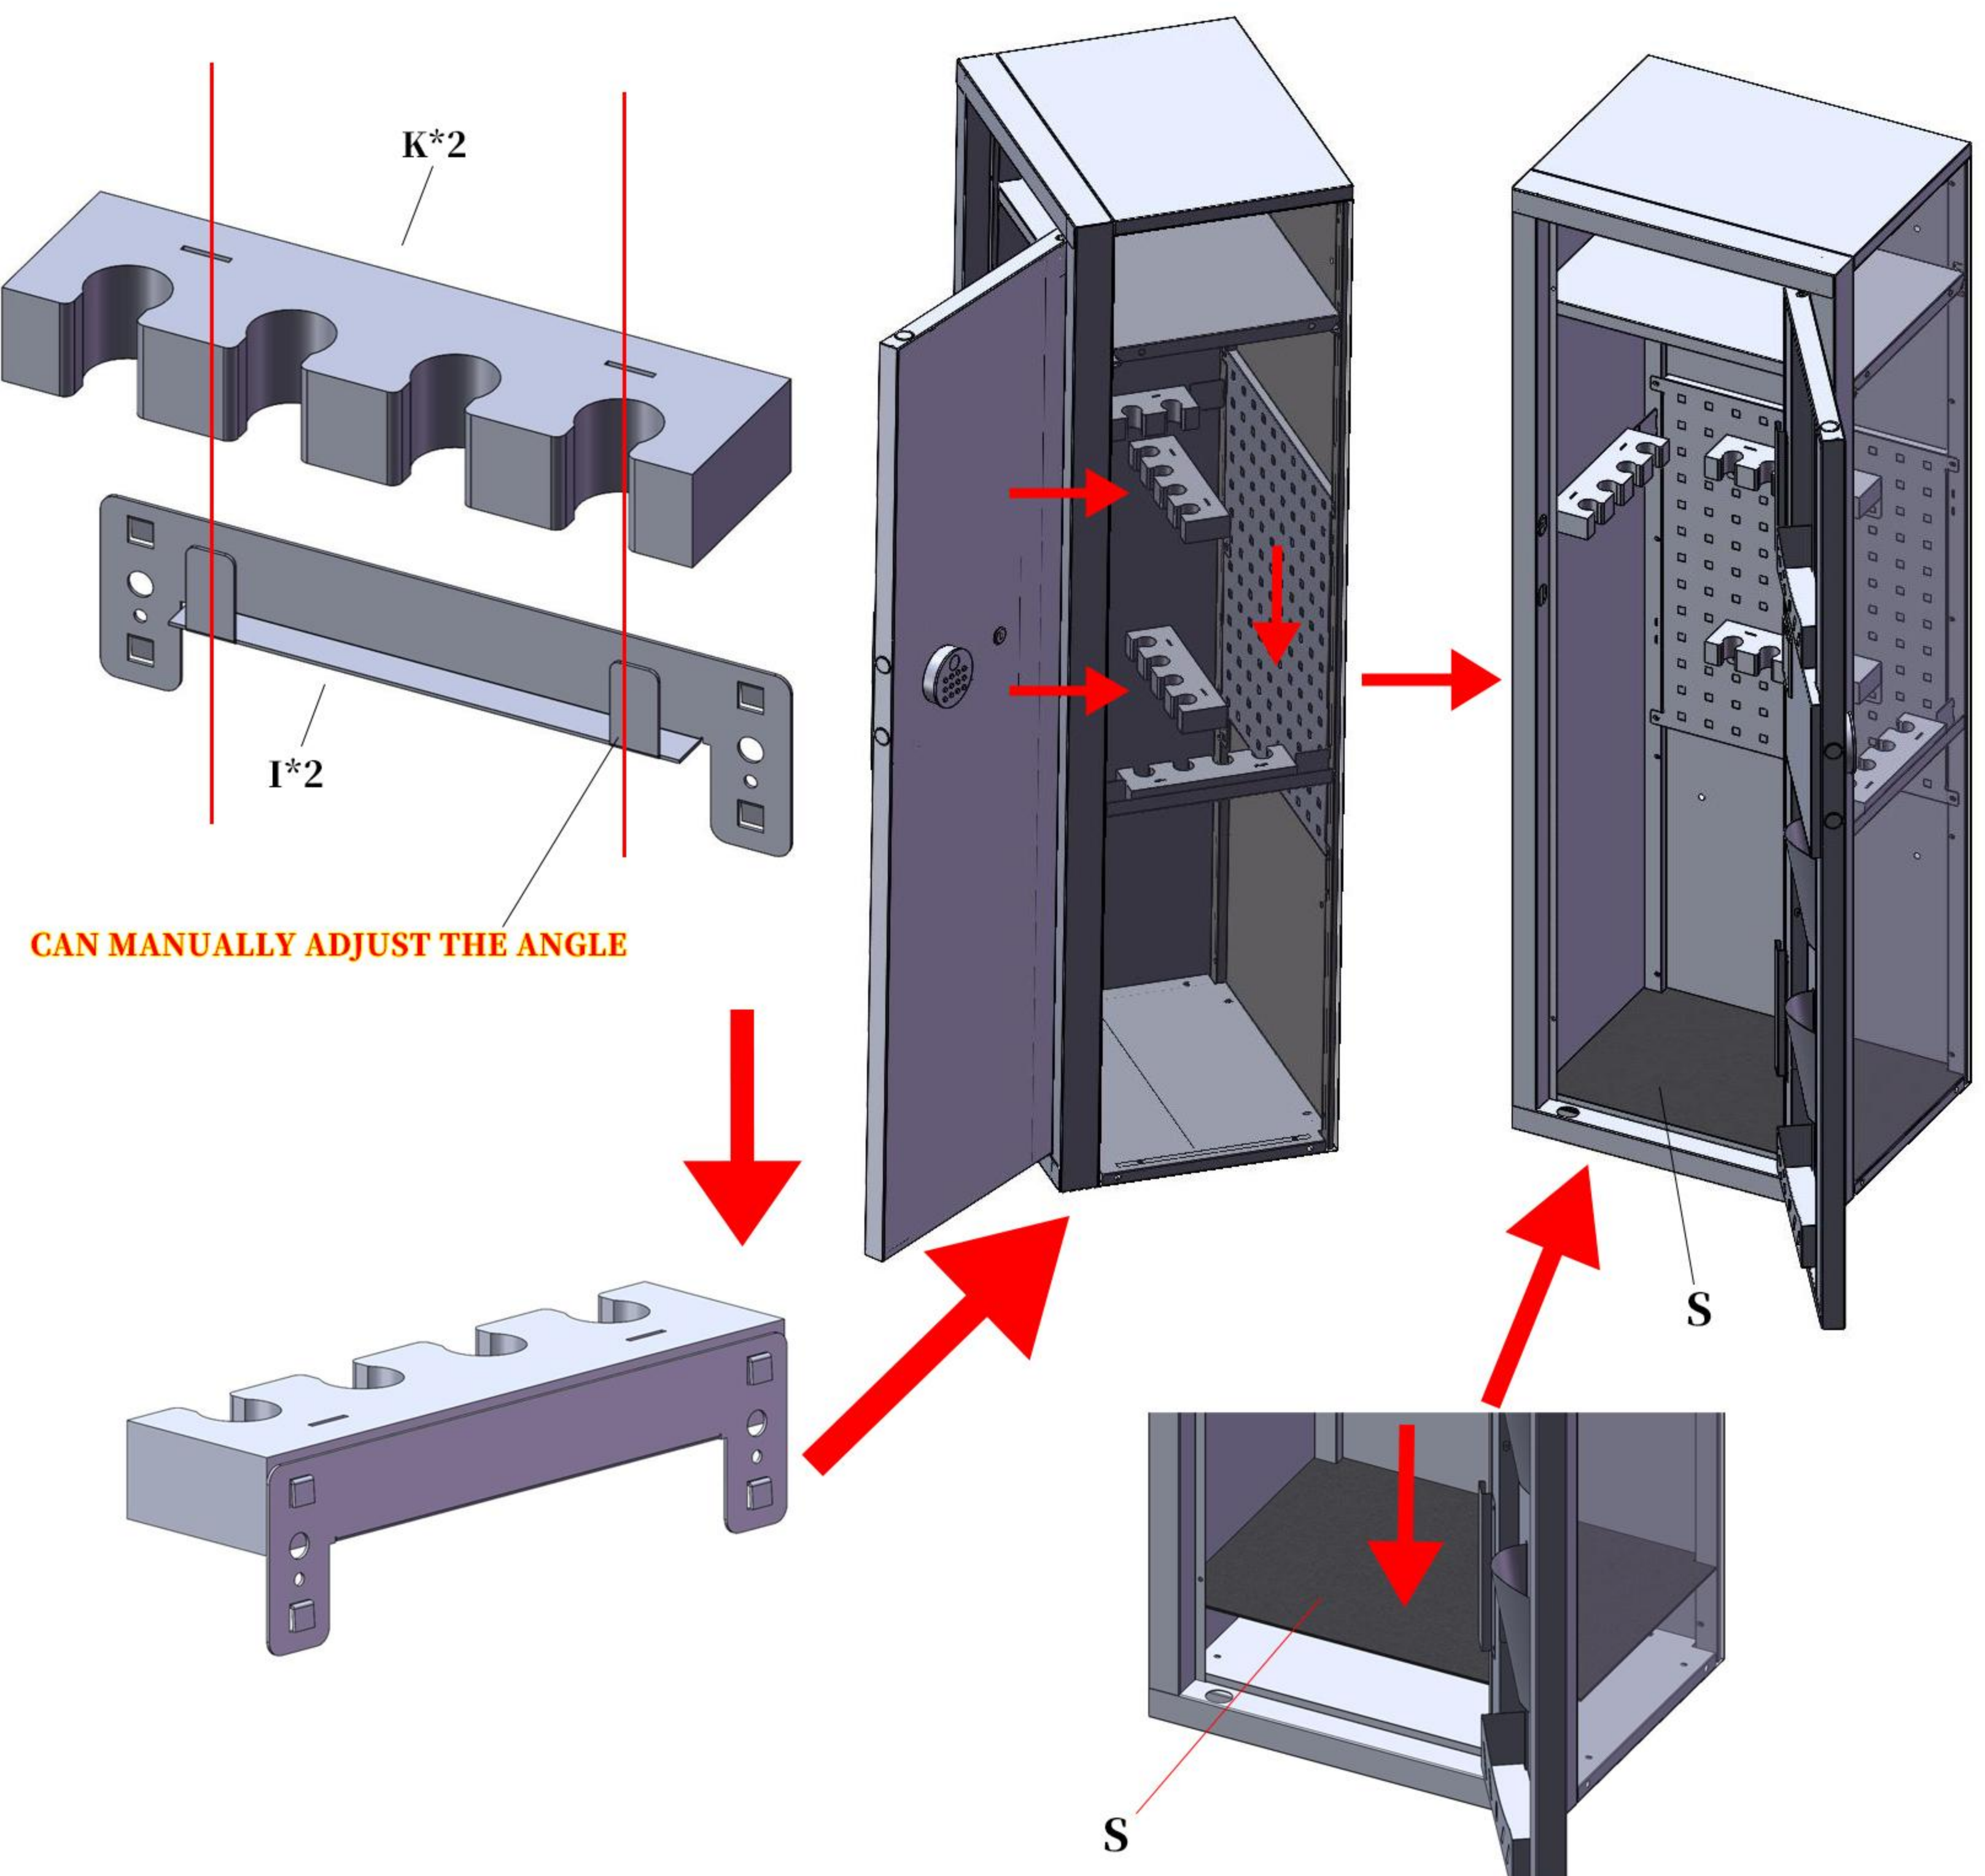


P*4

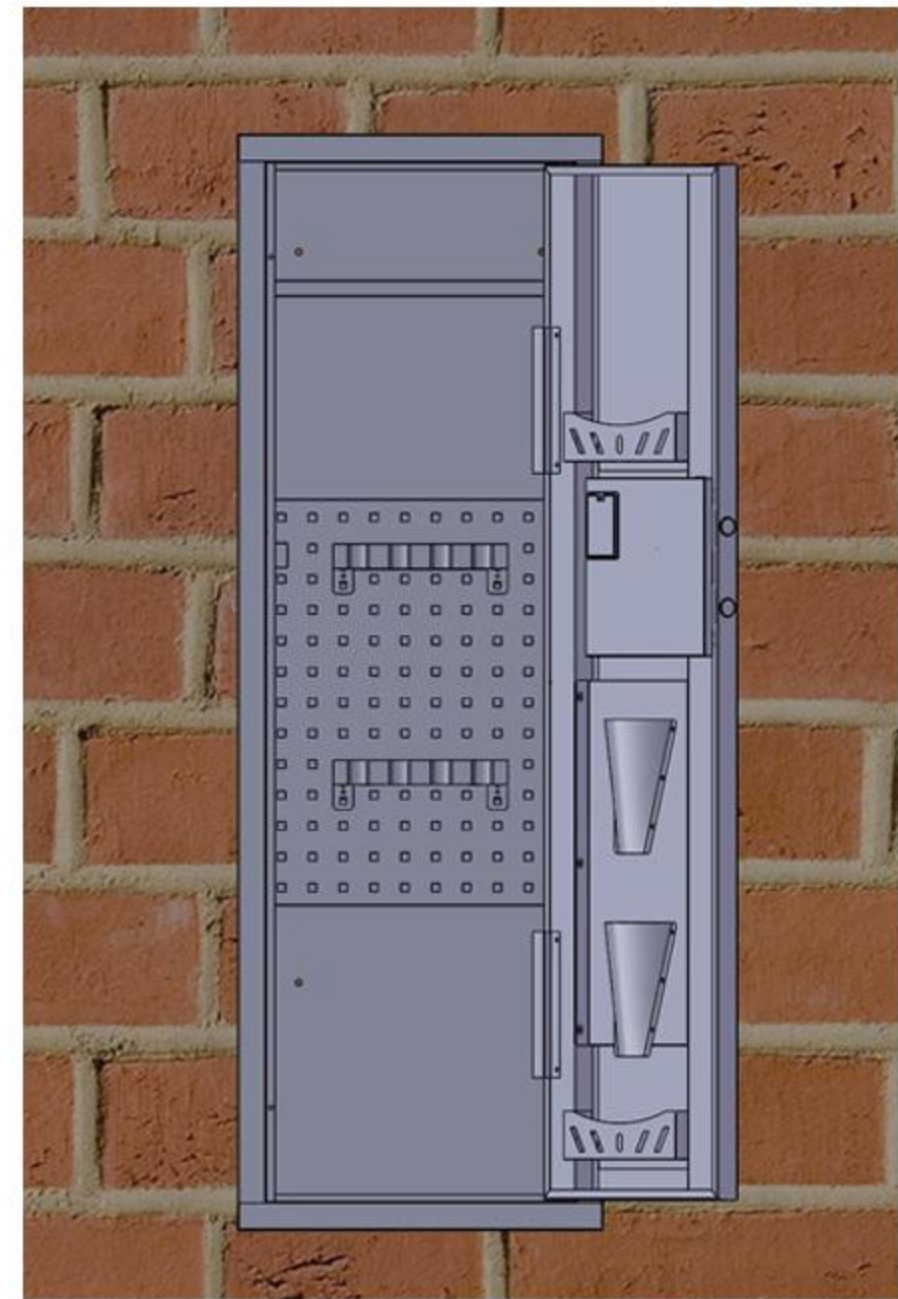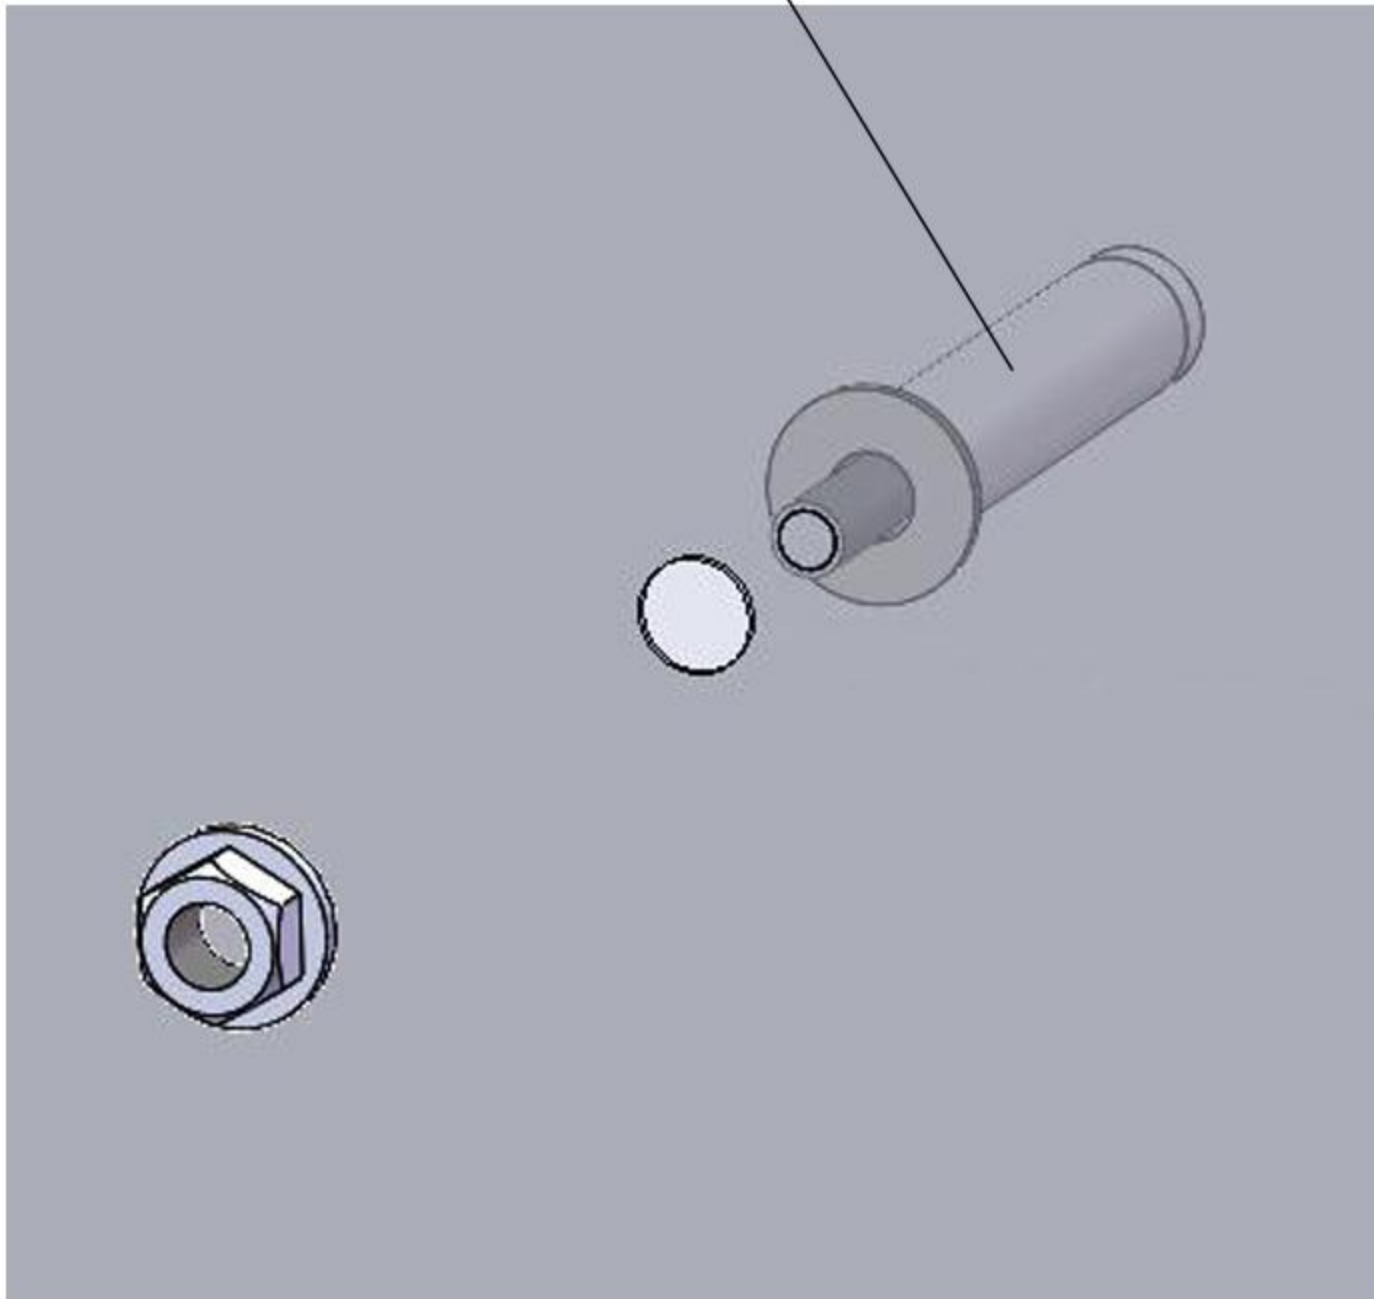

Easy Installation

1. Drill appropriately sized holes wherever you like.
2. Hand thread the expansion screws through the pre-drilled holes in the safe.
3. Tighten the screws and check that they are secure.

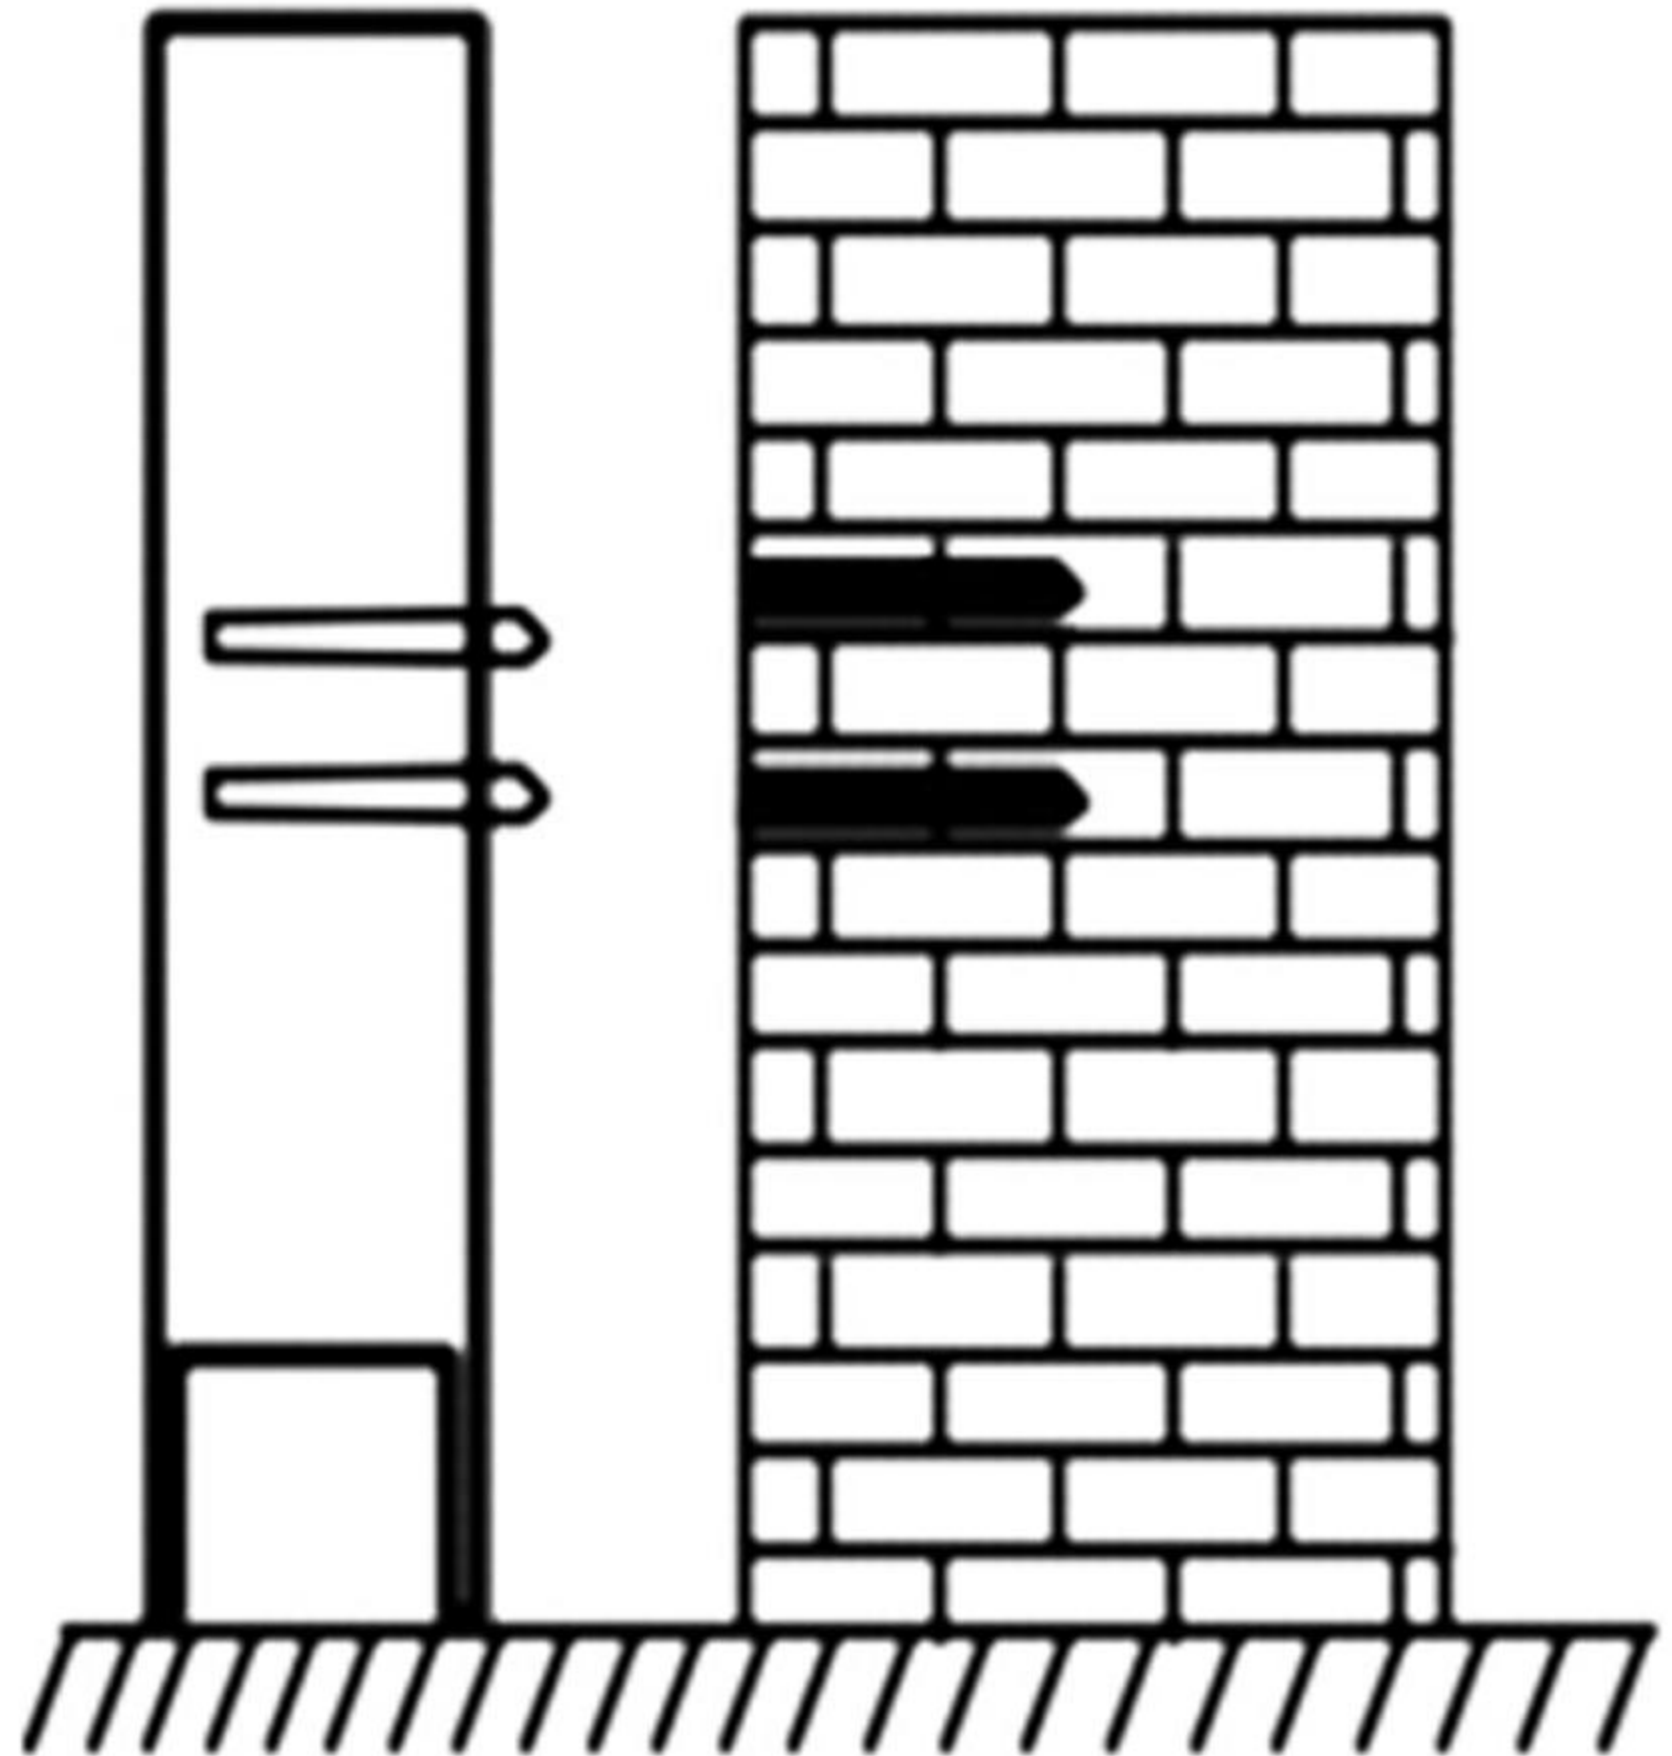

WARNING



Tip Over Hazard

- Please secure the gun safe to a wall or floor before use to prevent children or adults from tipping the safe over and causing death or serious injury.
- Children should not play around the safe at any time.

FINGERPRINT MANUAL

1. HOW TO ENTER MANAGEMENT MODE

FIRST, PRESS THE GREEN SETTINGS BUTTON INSIDE THE BOX,

THEN ENTER THE MANAGEMENT PASSWORD

123456 # TO ENTER THE MANAGEMENT MODE

2. SET MENU INDEX

(WAIT FOR THE PANEL INDICATOR LIGHT TO TURN OFF BEFORE OPERATING)

PLEASE PRESS "**1**" TO SET THE USER PASSWORD

PLEASE ENTER A 3-8-DIGIT USER PASSWORD AND END WITH THE # KEY.

- INPUT SUCCESSFUL

PLEASE ENTER ONCE

- SUCCESSFULLY SET UP

-INPUT ERROR (BEEP SOUND)

PLEASE PRESS "**2**" TO ADD FINGERPRINTS

REGISTERED SUCCESSFULLY

REGISTRATION FAILED (BEEP SOUND)

PLEASE PRESS "**3**" TO DELETE FINGERPRINTS

SHAN SUCCESSFULLY ELIMINATED

SHANQU FAILED (BEEPING SOUND)

PLEASE PRESS "**4**" TO SET THE MANAGEMENT PASSWORD

PLEASE ENTER A 3-8-DIGIT MANAGEMENT PASSWORD

AND END WITH THE # KEY.

- INPUT SUCCESSFUL

PLEASE ENTER ONCE

SUCCESSFULLY SET UP

-INPUT ERROR (BEEP SOUND)

PLEASE PRESS "**5**" TO SET THE DOOR OPENING MODE

PLEASE PRESS "**1**" TO SET IT AS THE COMMON DOOR OPENING MODE. IT CAN BE ACTIVATED WITH EITHER A SINGLE FINGERPRINT OR A SINGLE PASSWORD OF TO SET IT TO SAFE MODE, PLEASE PRESS "**2**" FOR SAFE MODE. ONLY WITH A PASSWORD AND FINGERPRINT CAN IT BE TURNED ON. ENTER THE PASSWORD AND FINGERPRINTS ARE NOT IN ANY PARTICULAR ORDER PLEASE PRESS THE * KEY TO EXIT

3. ALARM SETTINGS

1. PRESS THE * KEY TO ACTIVATE THE ALERT, VIBRATE TO SOUND AN ALARM, ENTER THE CORRECT PASSWORD OR FINGERPRINT TO CLEAR THE ALARM, 2. INCORRECT PASSWORD ERROR 3 TIMES OR FINGERPRINT ERROR 3 TIMES, HORN ALARM, ENTER CORRECT PASSWORD OR FINGERPRINT, ALARM CLEARED

PRECAUTIONS

1

THE ABOVE OPERATION WILL HAVE A FULL VOICE PROMPT, AND YOU CAN FOLLOW THE VOICE PROMPT TO OPERATE

2

MANAGEMENT PASSWORD DIGITS: 3 TO 8 DIGITS. WHEN LEAVING THE FACTORY, THE INITIAL MANAGEMENT PASSWORD IS "**123456**".

3

RESTORE FACTORY SETTINGS: THE GREEN BUTTON INSIDE THE BOX SHOULD BE CONTINUOUSLY PRESSED FOR AT LEAST 6 SECONDS.

4

THE NUMBER OF FINGERPRINTS IS **60**.

5

AFTER INSTALLATION, IT IS RECOMMENDED TO CHANGE THE MANAGEMENT PASSWORD (EMERGENCY KEY) AND (SPARE BATTERY BOX) MUST BE DO NOT PUT IT IN THE CABINET, PLEASE KEEP IT SAFE