#### **OVERVIEW**

- This vanity is comprised of:
- 1x Back plate
- 2 1x Front plate
- Bulb(s)
- Bulb protector(s)
- Shades(s)


## **TOOLS**

Items required for installation include: a Philips head screwdriver and one person.









• Turn off all power - if you have any doubt

about electrical work, consult a licensed

ALWAYS OBSERVE LOCAL BUILDING CODES

ALWAYS WEAR EYE PROTECTION

electrician.

# MOUNTING STEP BY STEP INSTRUCTIONS


#### STEP 1


Turn off all power – if you have any doubt about electrical work, consult a licensed electrician.

Fasten back plate to outlet box and make sure fixture is level. **Note:** For multi-light installation applications the fixture can also be attached to the wall using anchors and screws (not included).

### STEP 2


Pull the three wires (green, black & white) from the electrical outlet box in the wall through the centre hole in the back plate. Join the wires from the front plate to the wires from the outlet box using the supplied plastic connectors. *Remember:* black to black, white to white, green is ground.

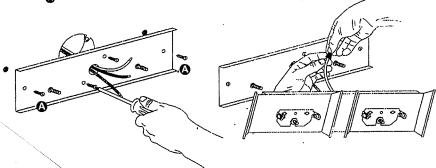




#### STEP 3

Join front plate to back plate with nuts provided. *Note:* When joining the front plate to the back plate ensure that the tabs **3** on the glass holders are on the bottom.




#### STEP 4

Hold bulb with tissue or dry cloth **(A)** and insert one end of the bulb into the closed socket **(3)** and gently push in, then fit the other end of the bulb into the open socket **(4)** 



## STEP 5

Snap on bulb protectors over sockets.



### STEP 6

Slide front glass into glass holders from top.