



# Corner Shed & Summerhouse

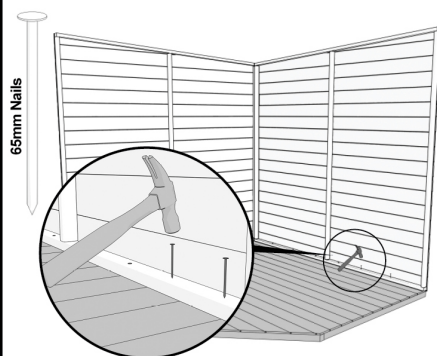


## 1. Base


## 3. Door

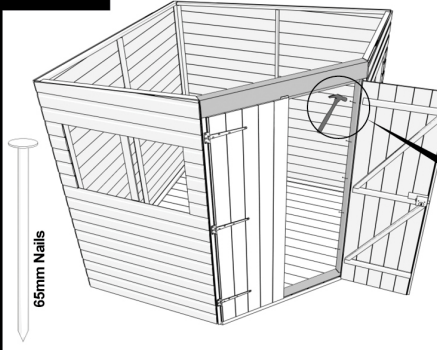

## 6. Bargeboards & Finials

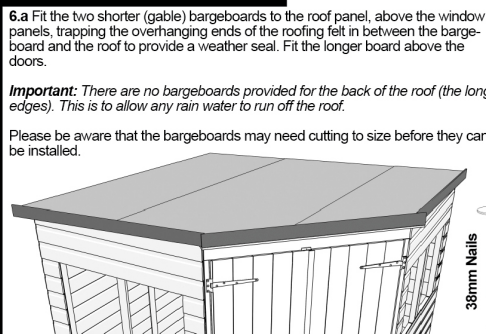


- 1.a Lay the floor down in the desired position.
- 1.b Check that the floor is level using a spirit level before proceeding.
- 1.c Each floor joist should be as near as possible supported along its full length to prevent the floor from dipping.
- 1.d Ensure 65mm nails are driven through the side and gable panel base rails, through the floor boards in a position where they will finally penetrate the floor joist.

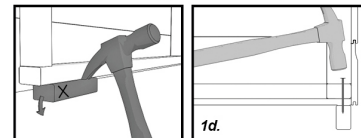


**Important**

- The floor panel must be laid on a firm level base.
- The underside of this floor must be treated with a quality wood preserver.
- Before starting assembly, you may have to remove transport blocks (marked x) from the bottom of some panels.

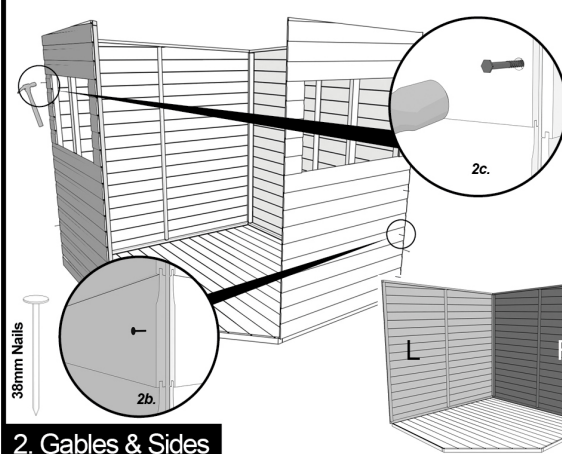


## 2. Gables & Sides

## 4. Roof

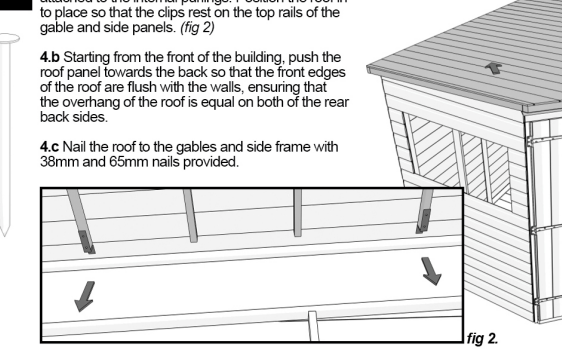


- 2.a Position the left rear side (blank) panel on to the edge of the floor panel.
- 2.b Offer up a side wall panel and secure this to the gable by using the 38mm nails through the sides into the gables.
- 2.c Then use the coach screws provided, through the pre-drilled holes in the gable, from the outside.
- 2.d Place a window gable panel in position and secure this to the side panel. Again using the coach screws provided to secure in place. Repeat this for the second window panel.




**Important**

Check that the sides are at right angles to the gables and to the floor, then tighten all coach screws to secure the sides and the gables. (fig 1)


The floor panel must be laid on a firm and level base.

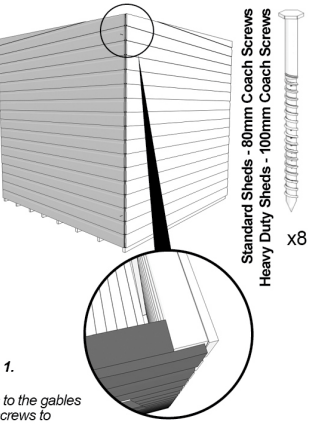


## 5. Felt

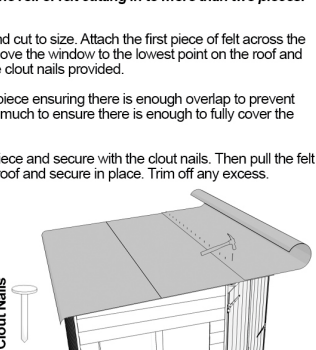

## 8. Corner Strips




## 7. Windows

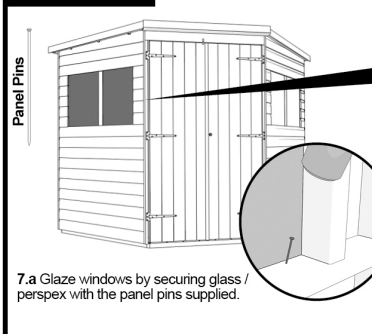

**Important:**

All windows must be sealed inside and out with silicone, putty or any other water-tight solution (not supplied). We do not supply window beading as standard with our buildings.

## 8. Corner Strips

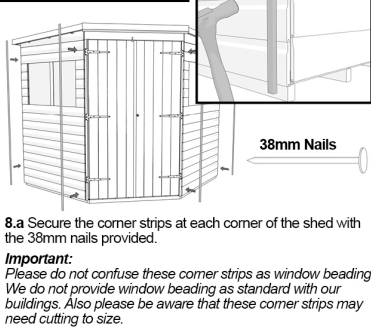

**8.a** Secure the corner strips at each corner of the shed with the 38mm nails provided.

**Important:**

Please do not confuse these corner strips as window beading. We do not provide window beading as standard with our buildings. Also please be aware that these corner strips may need cutting to size.

## Corner Summerhouse

The corner summerhouse can be constructed by following this set of instructions.

- Check List**
- x1 Floor (Found in polytube)
  - x2 Window Gables (triangular)
  - x2 Rear Blank Sides (rectangular)
  - x1 Door Panel
  - x1 Roof Panel
  - Roofing Felt
  - Glass / Perspex
  - x3 Bargeboards
  - x2 Diamond Finials
  - x5 Corner Strips
  - Fixing Pack

**Treat your building annually:** Although it may come with a factory basecoat you should treat your new garden building inside and out shortly after installation with a good quality water resistant treatment. This process should then be repeated annually with care taken to brush the treatment into all wooden components involved within the construction of the building, inside and out.

**Ensure nothing is in contact with your building:** Any overhanging tree or hedge growth poses a threat to your garden building and should be cut back at regular intervals. If a tree branch makes contact with your building it may pierce the roofing felt and encourage water ingress. You should also take care not to allow plants to grow too close to the walls of your building to prevent leaks.

**Check and replace any damaged felt:** If you do find any damage sustained to your roofing felt over time it is essential that you act upon this without delay. Should you discover a rip or tear in the felt it is recommended that this area be stripped from the roof and a new covering of high grade, heavy duty, mineral felt (which can be purchased online and/or at most retail DIY stores) be affixed immediately.

You should also ensure that your new building is covered on your household insurance policy, as we cannot be held responsible for damage caused by storms or vandalism.

For more help and advice on installing and maintaining your garden building please visit our comprehensive help centre at: [www.tigersheds.com/helpcentre.asp](http://www.tigersheds.com/helpcentre.asp)

Standard Sheds - 80mm Coach Screws  
Heavy Duty Sheds - 100mm Coach Screws  
x8