PHIESTINA
Installation Guide

To obtain service or inofrmation please email to:
phiestinasupport@foxmail.com
or call 866-675-2011

Attention

- ➢ It's recommended to put a pipe joint putty on the upper gasket of the bottom assembly. This will ensure you get a good seal on the bottom of the sink.
- ➢ Make sure the overflow hole of the pop up drain and the overflow of your sink is completely aligned if your sink come with overflow.
- ➢ If there isany leakage, please re-assemble the drain according to the previous steps.

Widespread faucet installation video please search:
https://youtu.be/_-rskTfzsUg

Pop-up Drain Installation Instruction

Package Contents

1. Top Flange
2. Upper gasket
3. Bottom gasket
4. Lock nut
5. Tailpipe

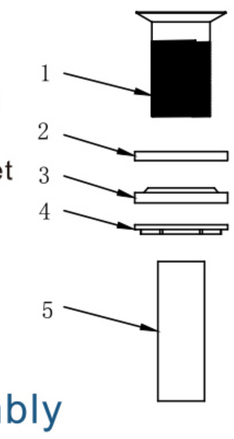

Notes

- Clean the top flange surface before installation.
- This item is not supposed to twisted any wrench.
- Do not use polishing powders to clean the drain.

Top Assembly

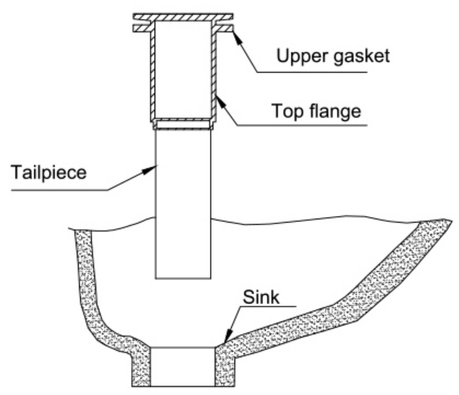

1.Align the upper gasket onto the top flange.

2.Insert the pop-up drain body up through the bottom of the sink.

Bottom Assembly

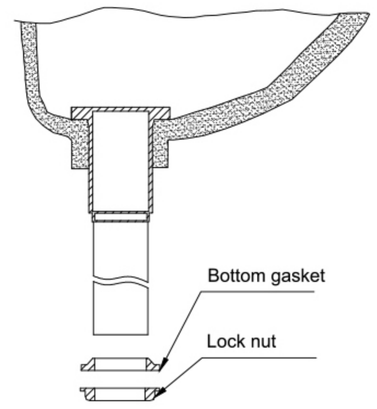

1.Align the bottom gasket as well as lock nut onto the tailpipe.

2.Place the drain body at the proper position and tighten up the lock nut.

PHIESTINA
Installation Guide

Tools you will need

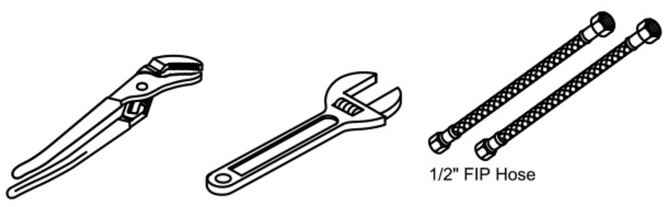

Note:style may vary by model

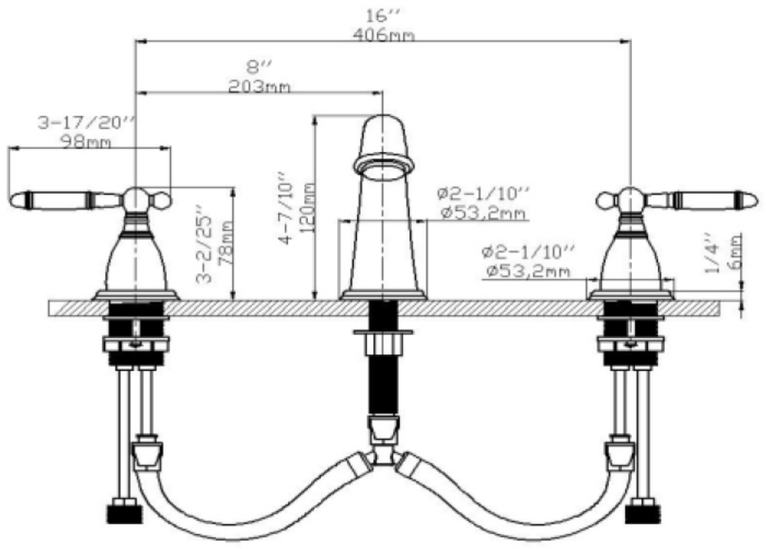

CRITICAL DIMENSIONS

Before Installation

1. Make sure you have all necessary parts by checking the diagram and parts list.
2. Turn off the hot and cold water supply at the angle and turn on the old faucet to release any built up pressure. Remove existing faucet. Clean sink or counter top preparation for new faucet.
3. Shut off angle stops.

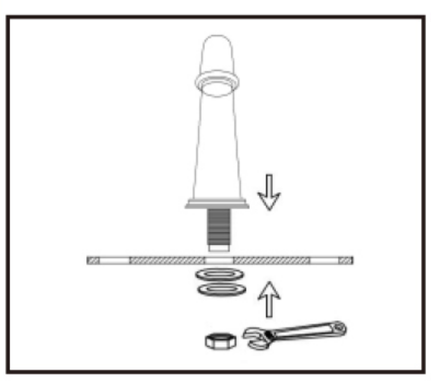

1.Place spout into the center hole of sink. Assemble washer and tighten the lock nut.

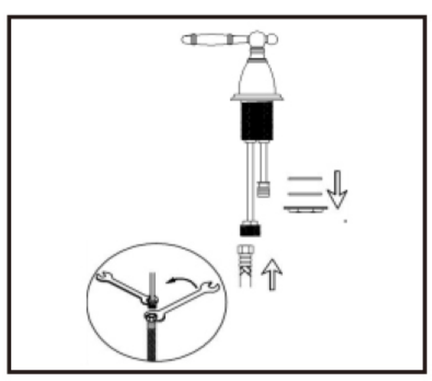

2.Place the handle body right/left sink hole. Assemble the tubber washer, metal washer and lock nut. (Hot water handle in left, cold water handle right)

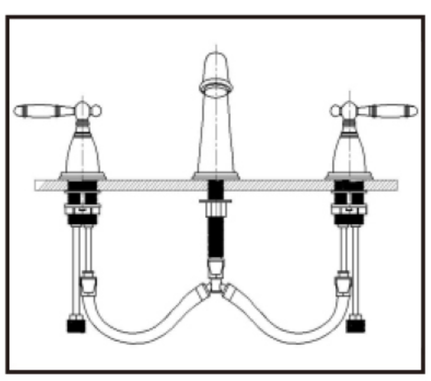

3.Connect the quick connect hose with 2 handles and spout.

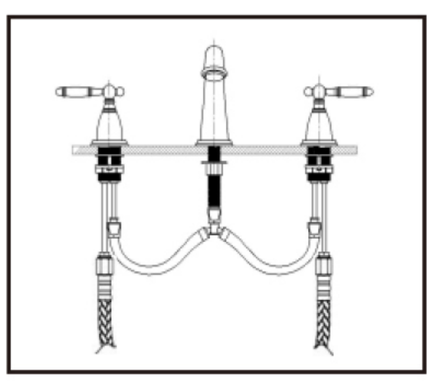

4.Connect the water supply hoses to two handle. Screwing the water supply lines into the shorter tube by hand.

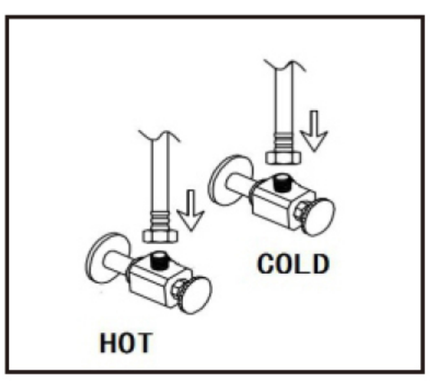

5.Attach two flexible hoses to two water supplies.