
ASSEMBLY INSTRUCTIONS FRONT SIDEBOARD							
ASSEMBLY REQUIREMENTS	1.5 Hours2 -Person AssemblyAssembly Time (Approximate)Image: Constraint of the second		Tools Required (Not Provided): Phillips Screwdriver € Flat Head Screwdriver €				
Thank you for purc	hasing our product!						
Contact our custome			t. ıg or damage parts or hardware.				
<ol> <li>Refer to Parts List Contact customer</li> <li>Place all wooden p</li> <li>SAFETY PRECAUT</li> <li>KEEP ALL HARD</li> </ol>	ging materials, staples and Hardware List an service for missing pa parts on a clean, flat an ION: WARE PARTS OUT O	nd soft surface (e.g. carpet F REACH OF CHILDREN.					
<ol> <li>Assemble the prod</li> <li>Identify all of the path</li> <li>During assembly, c</li> <li>DO NOT USE POV</li> <li>Always place the p</li> </ol>	LY: for assembly and in closure uct on a surface that do arts, hardware and quar to not over-tighten any VER TOOLS TO ASSE roduct on a flat, level su	ntities required for each step. fittings as this may cause dar MBLE THIS PRODUCT.	e exterior gloss and finish of the furniture. nage.				
<ul> <li>Check all the fittings damaged or broken.</li> <li>Never allow any kind</li> </ul>	cloth to clean the produ periodically and re-tigh d of liquid to remain on ns (e.g. hot drinks) dire	-	asive cleaning material. e the product if any of the parts is n cause wood to warp or delaminate.				

This product is for indoor and household use only - not for commercial use.

# ASSEMBLY INSTRUCTIONS FRONT SIDEBOARD

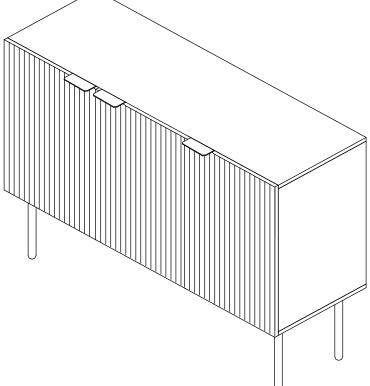


## Hardware List

ITEM	DESCRIPTION	PART	QTY	ITEM	DESCRIPTION	PART	QTY
А	Cam-Bolt	6*35mm	8 pcs	J	Hinge		4 pcs
В	Cam-Lock	<b>15*10mm</b>	8 pcs	к	Hinge		2 pcs
С	Wood Dowel	8*30mm	16 pcs	L	Screw	<b>U</b> <sup>tutur</sup> 4*12mm	2 pcs
D	Screw	<b>9</b> 3.5*14mm	36 pcs	М	Bracket		2 pcs
Е	Screw	7*40mm	8 pcs	N	Allen Key		1 pc
F	Screw	<b>6</b> 3*12mm	6 pcs	0	Bolt	6*15mm	16 pcs
G	Handle	$\sim$	3 pcs	Р	Sticker	O	6 pcs
н	Screw	<b>2</b> .5*10mm	34 pcs	Q	Plastic Anchor	C. Mar	2 pcs
I	Shelf Pin	Ð	12 pcs	R	Screw	3.5*40mm	2 pcs
				S	Bolt	6*30mm	2⊭41


## ASSEMBLY INSTRUCTIONS FRONT SIDEBOARD

Parts List


Parts List							
ITEM	DESCRIPTION	PART	QTY	ITEM	DESCRIPTION	PART	QTY
1	Top Panel		1 pc	8	Bottom Panel		1 pc
2	Left Panel		1 pc	9	Leg		4 pcs
3	Right Panel		1 pc	10	Side Back Panel	$\checkmark$	2 pcs
4	Left Divide Panel		1 pc	11	Middle Back Panel	$\bigcirc$	1 pc
5	Right Divide Panel		1 pc	12	Adjustable Shelf	$\diamond$	3 pcs
6	Left Door		1 pc	13	Metal Bar		1 pc
7	Middle and Right Door		2 pcs				

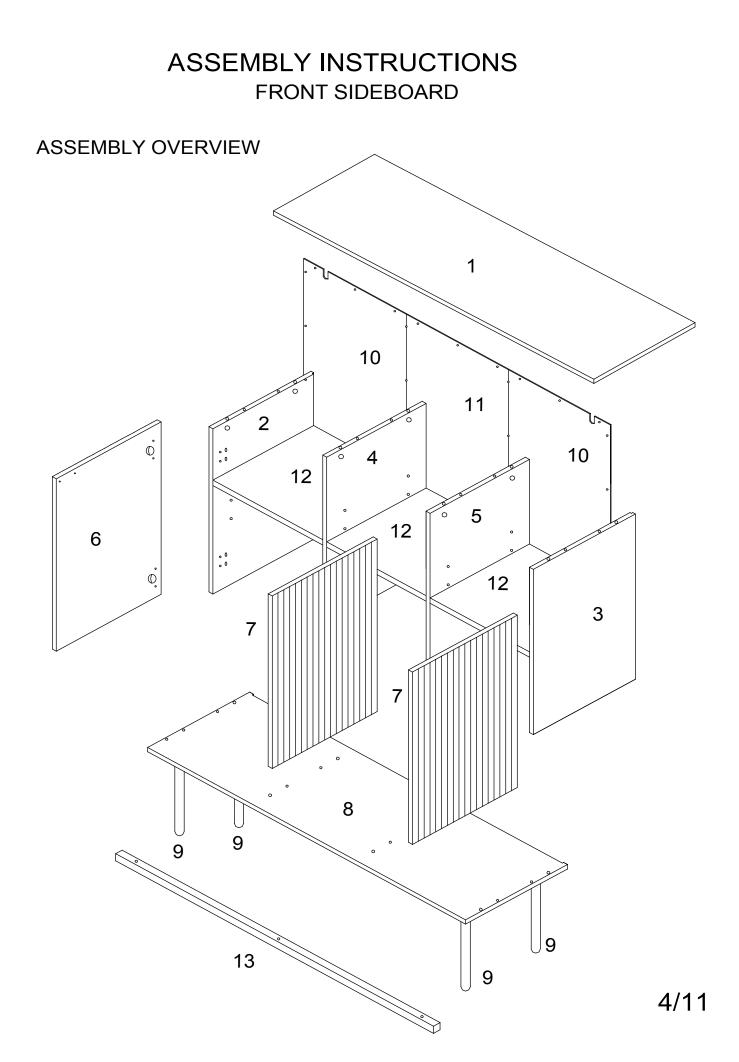


### Instructions For Fastening CAM-BOLT AND CAM-LOCK

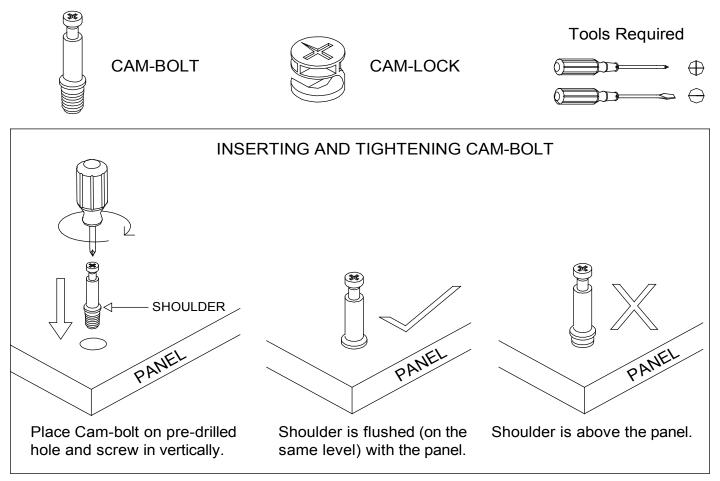

Place Cam-bolt to the designated pre-drilled holes on the panel. Use a Phillips Screwdriver to tighten Cam-bolt vertically until shoulder is flushed (on the same level) with panel. Do not over-tighten or under-tighten.

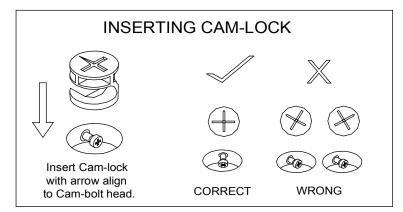



Align the arrow on the Cam-lock to the Cam-bolt head and insert the Cam-lock. Ensure Cam-lock is fully inserted.

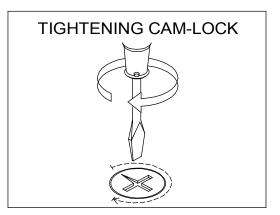


Use a Flat-head Screwdriver to turn Cam-lock clockwise so it locks onto the head of the Cam-bolt. Turn until it is snug (about 3/4ths of a turn) -- over-tightening could damage Cam-lock or/and Cam-bolt.


#### STEP 1

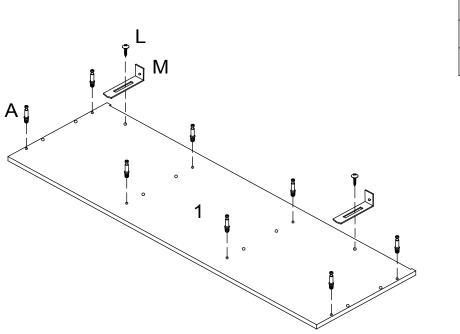




- a) Lay Top Panel (1) bottom-side on a material that does not scratch or damage the part.
- b) Screw in Cam-bolt (A) into the designated holes on (1). Refer to Page 5 for instructions on inserting and tightening Cam-bolt.
- c) Attach Bracket (M) to (1) by using Screw (L) as shown.

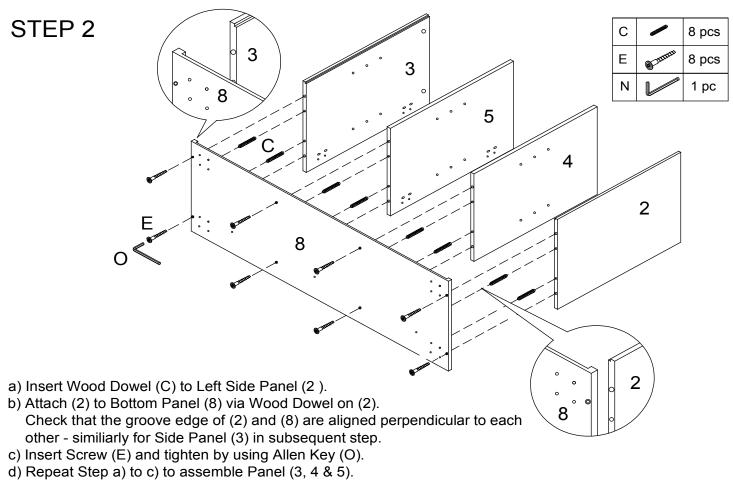


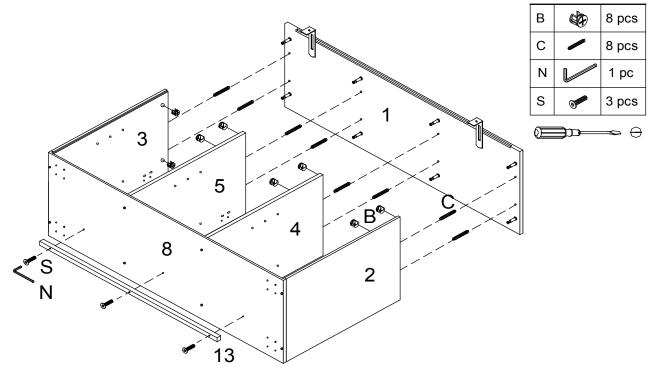


- a) Insert Wood Dowel (C) into inner two holes on top edge of Side Panel (2 & 3) and Divide Panel (4 & 5). b) Attach Top Panel (1) to (2, 3, 4 & 5) via Wood Dowels and Cam-bolts on (1).
- c) Insert Cam-lock (B) into the holes on (2, 3, 4 & 5) then turn clockwise to lock onto Cam-bolt. Refer to Page 5 for instructions on inserting and tightening Cam-lock.
- d) Attach Metal Bar (13) to Bottom Panel (8) with Bolt (S). Tighten Bolt (S) with Allen Key (N).

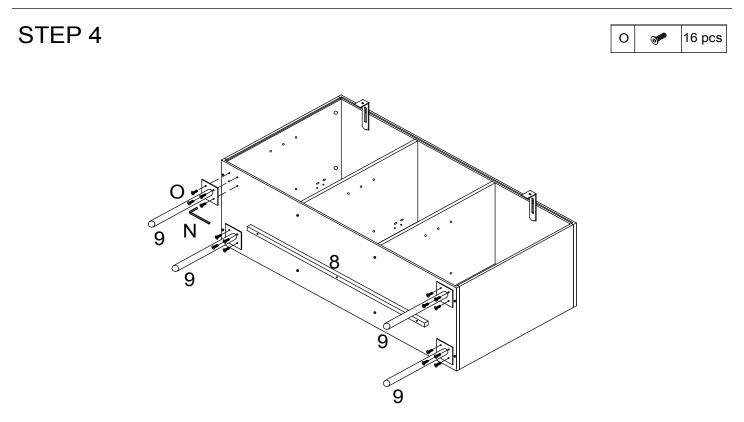


- a) Position Leg (9) to Bottom Panel (8) and align screw holes on Leg (9) and pilot holes on Bottom Panel (8) as shown and fasten with Bolt (O).
- b) Tighten Bolt (O) with Allen Key (N). Do not tighten the bolts completely until all four bolts are in place on each leg.



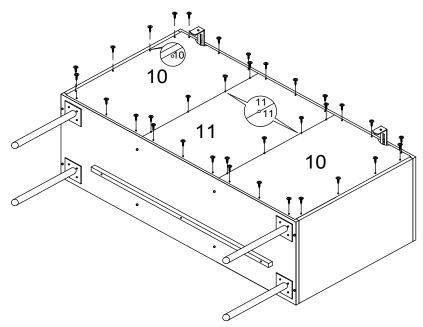



`Fit Back Panel (10 & 11) squarely between Top, Bottom and Side Panels - check that there is no gap between any of the panels. Next, use Screw (H) to fasten the back panels.

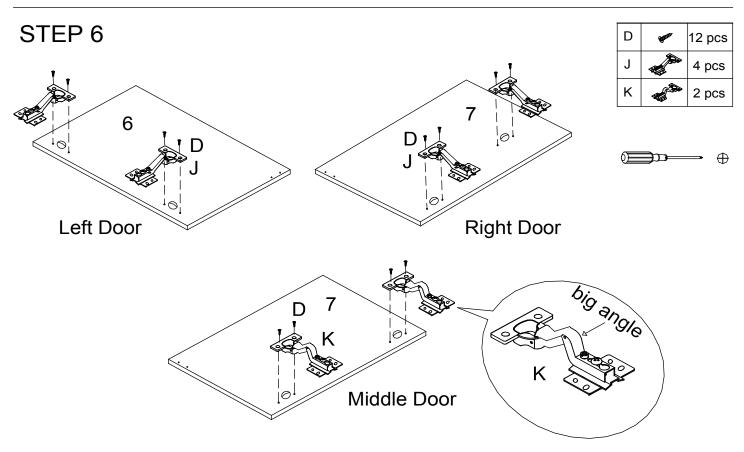


- a) Install Hinge (J) to Left Door (6) and Right Door (7) and install hinge (K) to Middle Door (7).
- b) Use Screw (D) to fasten Hinge. Do not tighten screw completely until both screws are in place on each hinge.

#### STEP 7

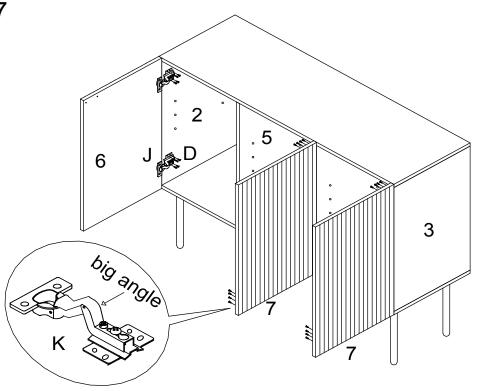





Use Screw (D) to fasten Left Door (6) and Right Door (7) - both with Hinge (J) - to Left Panel (2) and Right Panel (3), respectively. Next, use Screw (D) to fasten Middle Door (7) - with Hinge (K) - to Right Divide Panel (5).

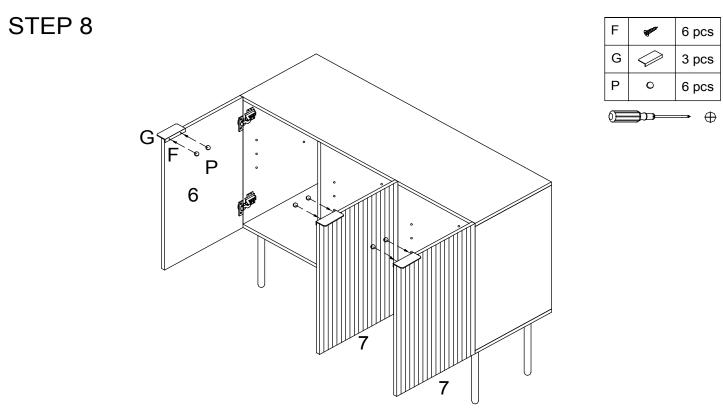

a) Attach Handle (G) to Door with Screw (F).b) Conceal the screw holes with Sticker (P).

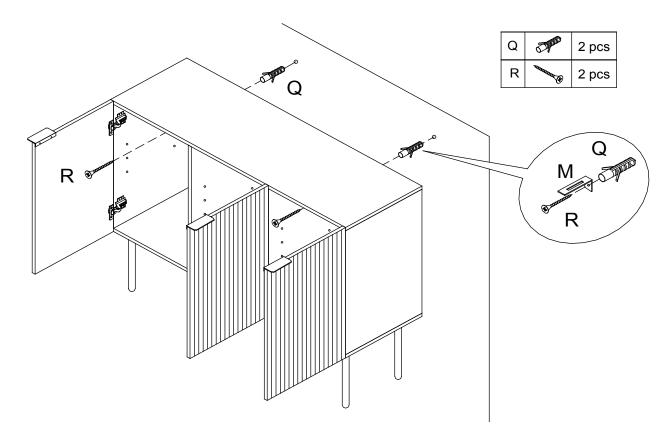


- a) Drill two holes in the dry wall as per the length and diameter of Plastic Anchor (Q) and the distance between the holes and the height need to the same as the screw holes on Bracket (M).
- b) Press Plastic wall anchor (Q) into the 2 drilled holes. Ensure that the anchor fits securely in the wall.
- c) Drive Screw (R) through the screw hole on adjustable Bracket (M) into the screw hole on (Q) to secure the Sideboard to the wall.

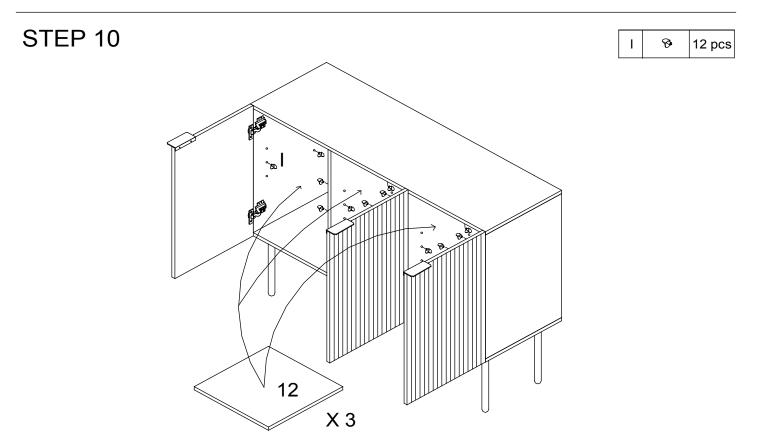

Insert Shelf Pin (I) and place the Adjustable Shelf (12) on it.

#### STEP 11

Adjust the doors if necessary.

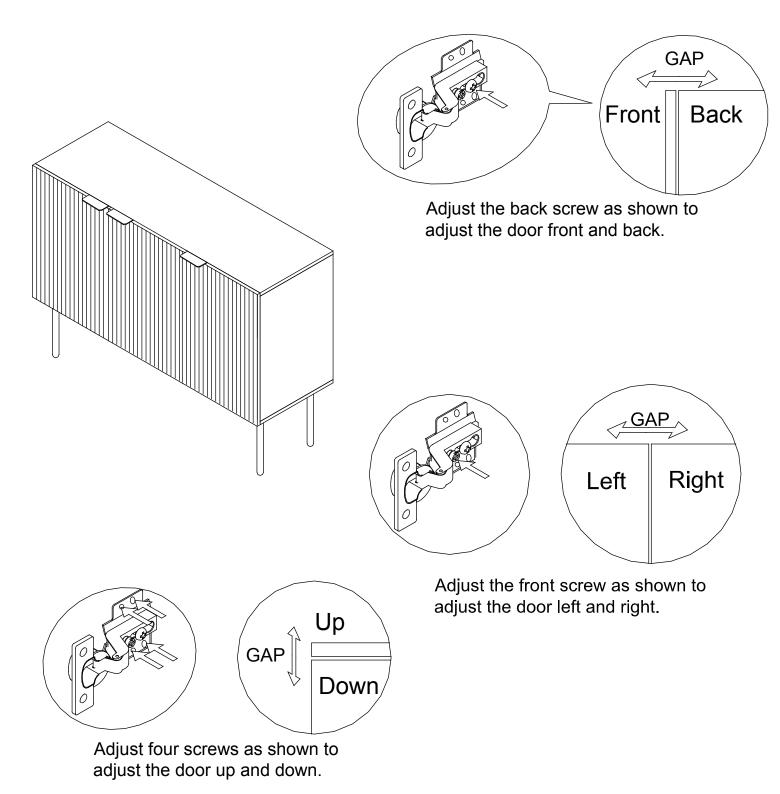

The assembly of the sideboard is complete.