

## WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN. WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION. INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

## CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.



To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

## NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- \* Please make sure that you have all parts indicated before you begin assembly of this item.
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.
- \* The external flexible cable or cord of this lamp cannot be replaced. If the cord is damaged, the lamp shall be destroyed.


## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	arm-1		1X	G	wall anchors		4X
B	arm-2		1X	H	wooden screw		4X
C	arm-3		1X	J	shade		1X
D	arm-4		1X	K	socket ring		1X
E	loop		2X	L	bulb		1X
F	fixture screws		2X				

# JONATHAN Y

Model#: JYL1304A


Product Dimensions: 11.5"W X 65"H X 24.5"E

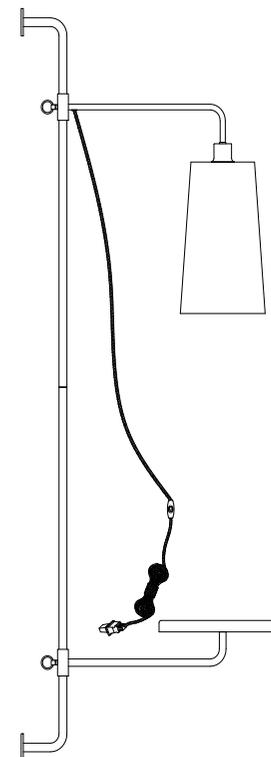

## PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 20 minutes.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



\*Note: When parallel wire ( SPT I & SPT II ) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

### Step

- Slide Arm-2 (B) into Arm-1 (A). Slide Arm-3 (C) into Arm-4 (D).
- Slide Arm-1 (A) into Arm-4 (D), Lock Arm-1 (A) and Arm-4 (D) with Fixture screws (F).
- Put the lamp body on the wall and make a mark at the hole of the lamp body with a marker pen. Lock and fix the lamp body to the wall with Wall Anchors (G) and wooden screw (H). Place the shade (J) on the socket (I), and then lock the shade (J) with socket ring (K). Lock the Bulb (L) to the socket (I).
- Loosen the upper handle (E) to adjust the shade (J) to move up and down and left and right, loosen the lower handle (E) to adjust the desktop (C) to move up and down and left and right.

PLEASE USE TYPE "A" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE IS 1PC 9-WATT LED BULB IN THE BOX.

**ENJOY YOUR LAMP**

