
















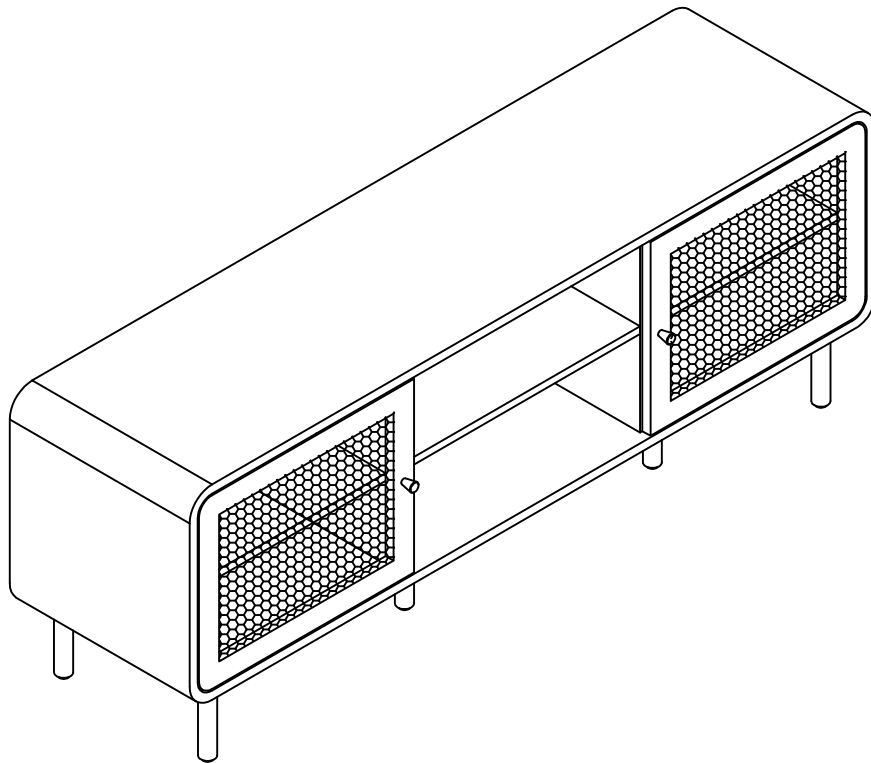

CROSLEY

FURNITURE






















Record Player Cabinet
With Vinyl Storage
CF1201



PARTS LIST

				
<p>Top Panel 1 PC</p>	<p>Right Panel 1 PC</p>	<p>Left Panel 1 PC</p>	<p>Right Partition Panel 1 PC</p>	<p>Left Partition Panel 1 PC</p>
				
<p>Bottom Panel 1 PC</p>	<p>Left Door 1 PC</p>	<p>Right Door 1 PC</p>	<p>Back Panel 1 PC</p>	<p>Corner 4 PCS</p>
				
<p>Adjustable Shelf 2 PCS</p>	<p>Middle Adjustable Shelf 1 PC</p>	<p>Leg 4 PCS</p>	<p>Support Leg 2 PCS</p>	<p>Cover 3 PCS</p>
 <p>Metal Wire 4 PCS</p>				

HARDWARE LIST

#1 	#2 	#3 	#4 	#5 	#6  8*30mm
Knob 2 PCS	Magnet 2 PCS	Cam Bolt 20 PCS (Extra 1)	Cam Lock 20 PCS (Extra 1)	Round Head Bolt 2 PCS (Extra 1)	Wood Dowel 24 PCS (Extra 1)
#7 	#8 	#9 	#10 	#11 	#12  6*3*15mm
Tapping Bolt 4 PCS (Extra 1)	Long Bolt 6 PCS (Extra 1)	Short Bolt 18 PCS (Extra 1)	Shelf Holder 12 PCS (Extra 1)	Connecting Bar 6 PCS	Round Head Screw 4 PCS (Extra 1)
#13 	#14 	#15 	#16 	#17 	#18  M2
Screw 22 PCS (Extra 1)	Metal Plate 2 PCS	Flat Head Bolt 4 PCS (Extra 1)	Cam Sticker 20 PCS (Extra 1)	Binding Post 3 SETS (Extra 1)	Small Allen Wrench 1 PC
#19 	#20 	#21 			
Allen Wrench 1 PC	Wrench 1 PC	Hex Nut 8 PCS (Extra 1)			

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.






Phillips Head Screw



Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

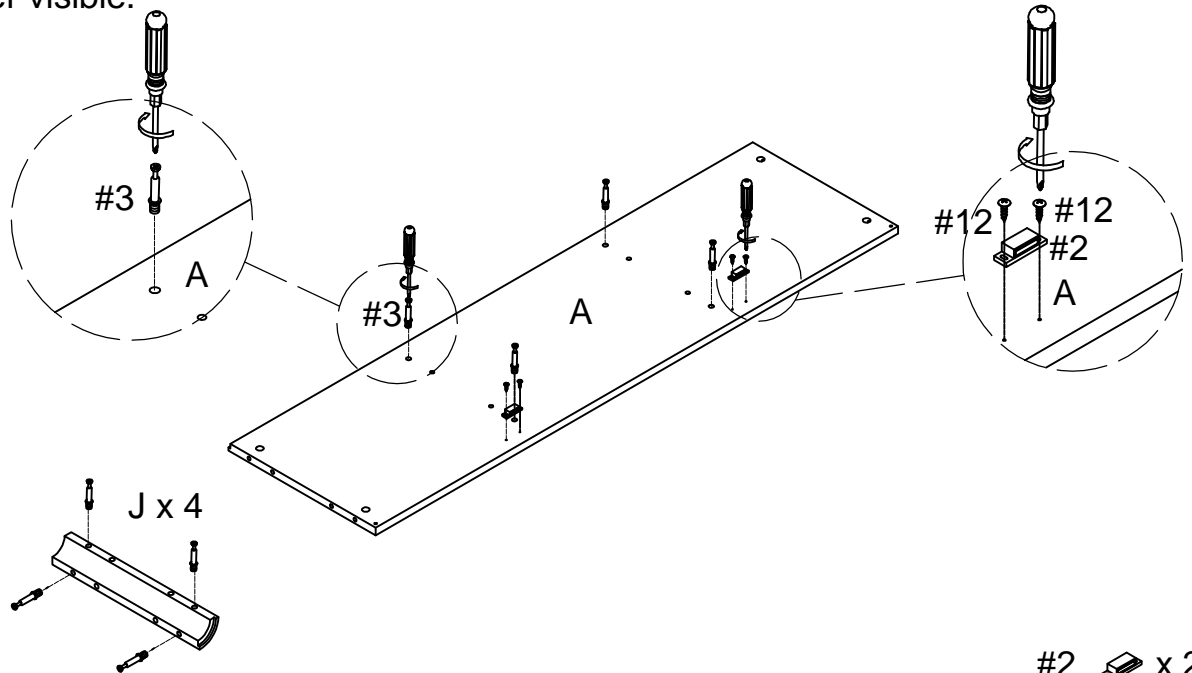

Step 1. Insert cam bolts (part #3) into pre-drilled holes of top panel (part A) and corners (part J) using phillips head screwdriver. Attach magnets (part #2) to top panel (part A) using round head screws (part #12) and phillips head screwdriver.
 Note: Do not over tighten cam bolts. Stop tightening once threads on cam bolts are no longer visible.




- #2  x 2
- #3  x 20
- #12  x 4

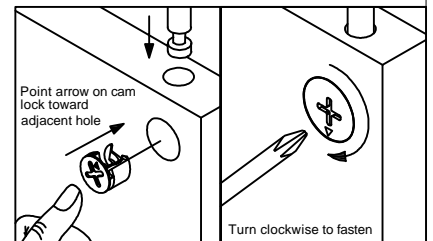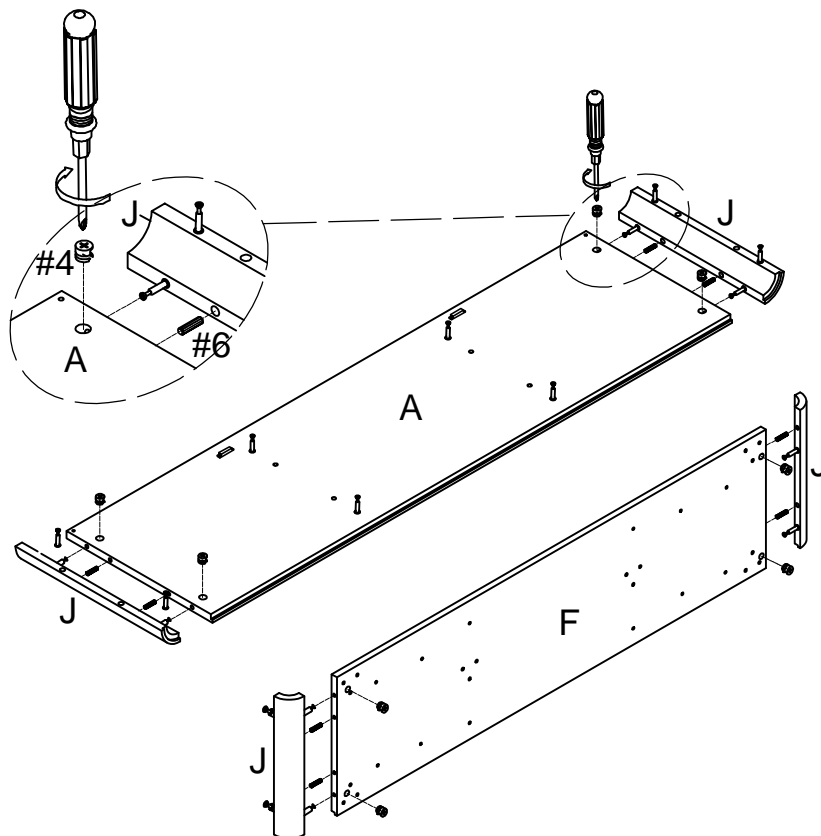Step 2. Attach corners (part J) to panels (parts A & F) using cam locks (part #4), wood dowels (part #6) and phillips head screwdriver.
 Note: Cam locks must rotate a full 180°. See pictured insert.




- #4  x 8
- #6  x 8

Step 3. Attach connecting bars (part #11) to legs (parts M & N) using long bolts (part #8) and allen wrench (part #19). Attach knobs (part #1) to doors (parts G & H) using round head bolts (part #5) and phillips head screwdriver.

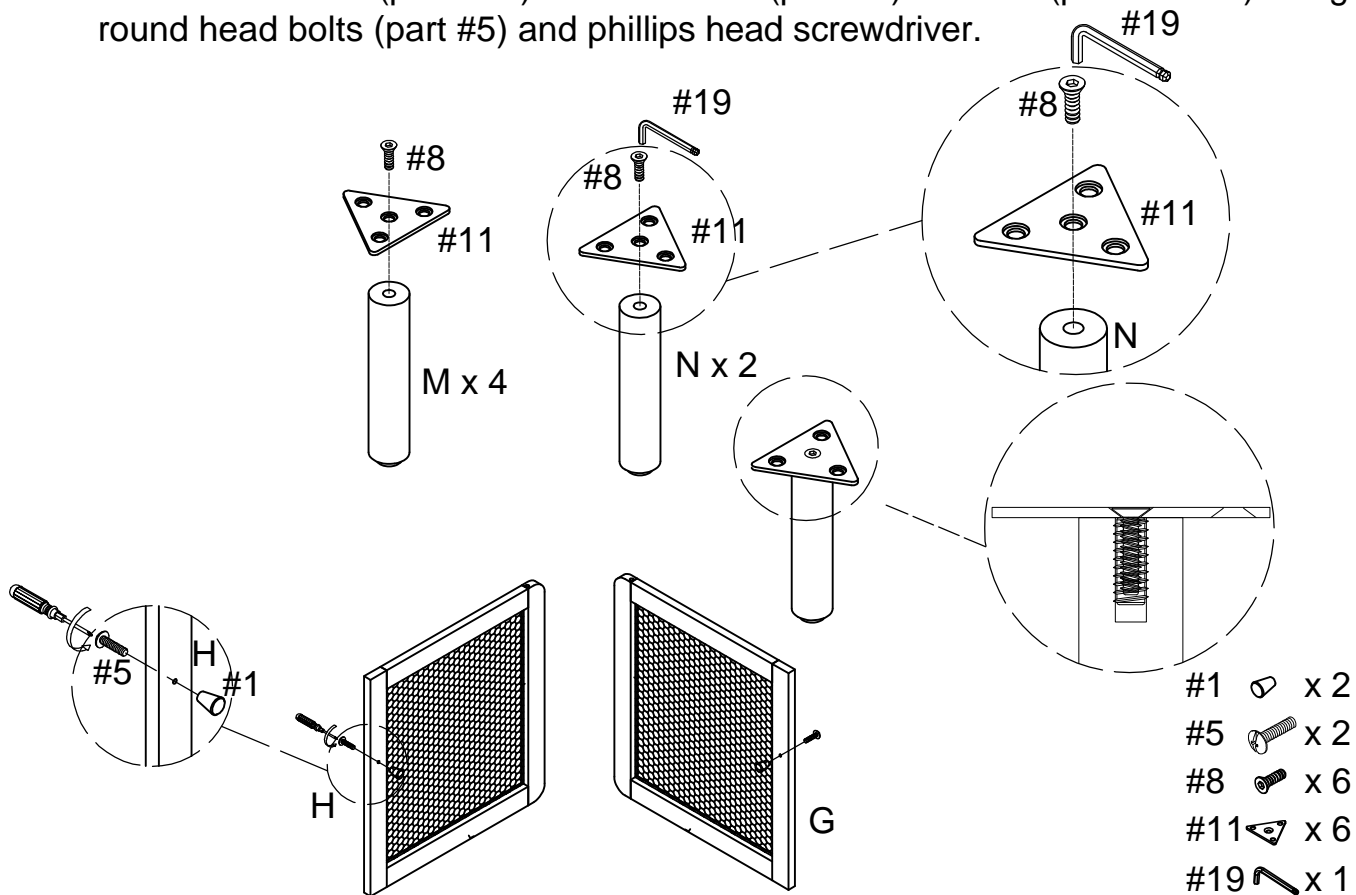


Step 4. Attach covers (part O) to back panel (part I) using binding posts (part #17) and small allen wrench (part #18).

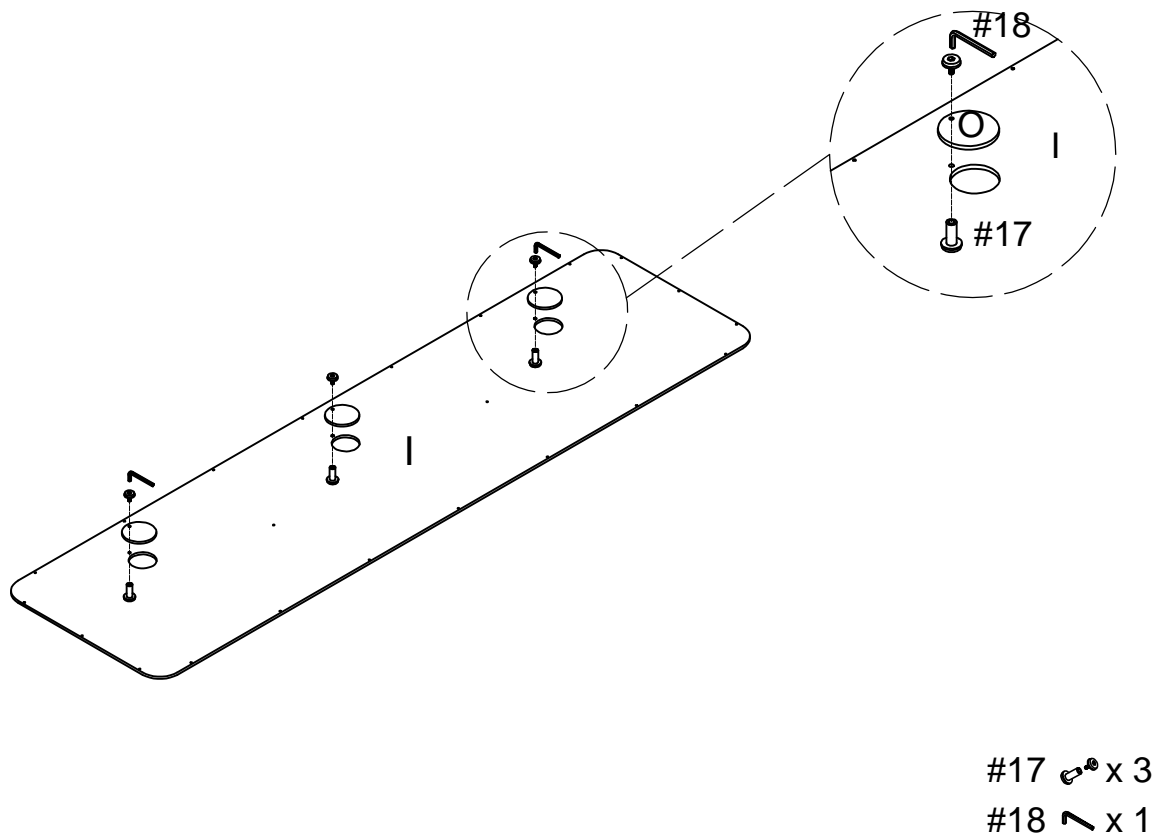

Step 5. Attach panels (parts B, C, D & E) to assembled unit (parts A & J) using cam locks (part #4), wood dowels (part #6) and phillips head screwdriver.

Note: Cam locks must rotate a full 180°. See pictured insert.

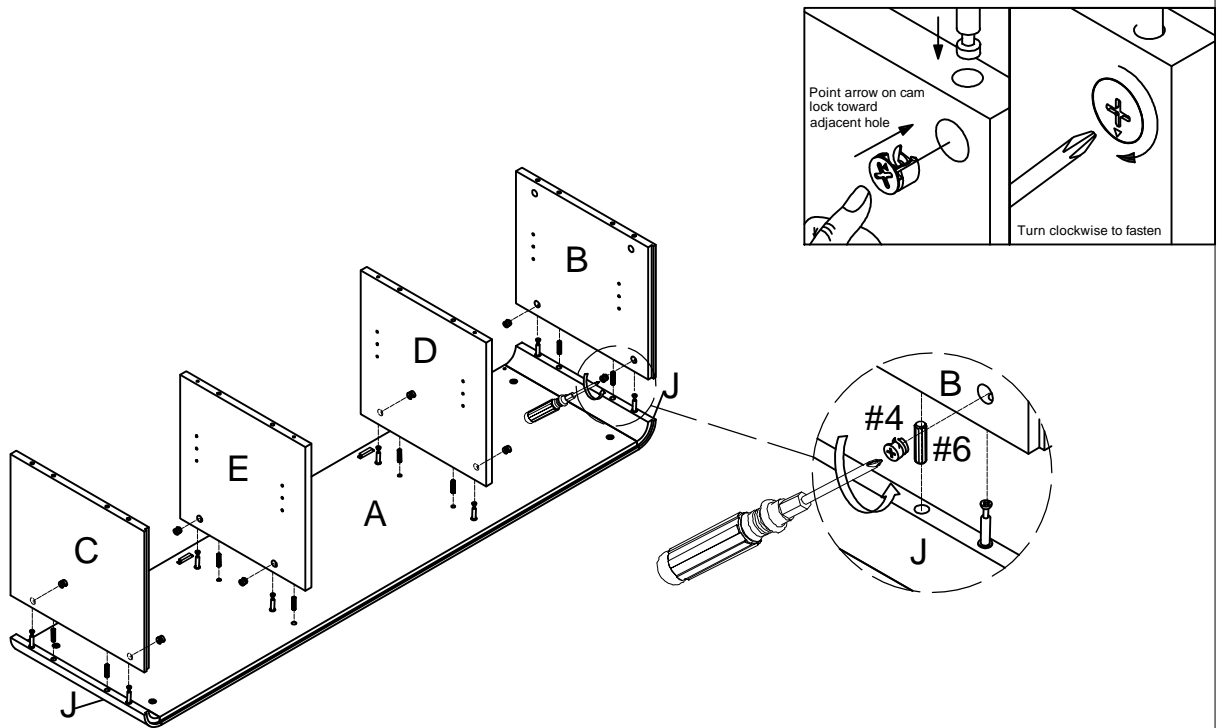


#4  x 8

#6  x 8

Step 6. Attach assembled unit (parts F & J) to panels (parts B, C, D & E) using cam locks (part #4), wood dowels (part #6), tapping bolts (part #7) and allen wrench (part #19).

Note: Cam locks must rotate a full 180°. See pictured insert.

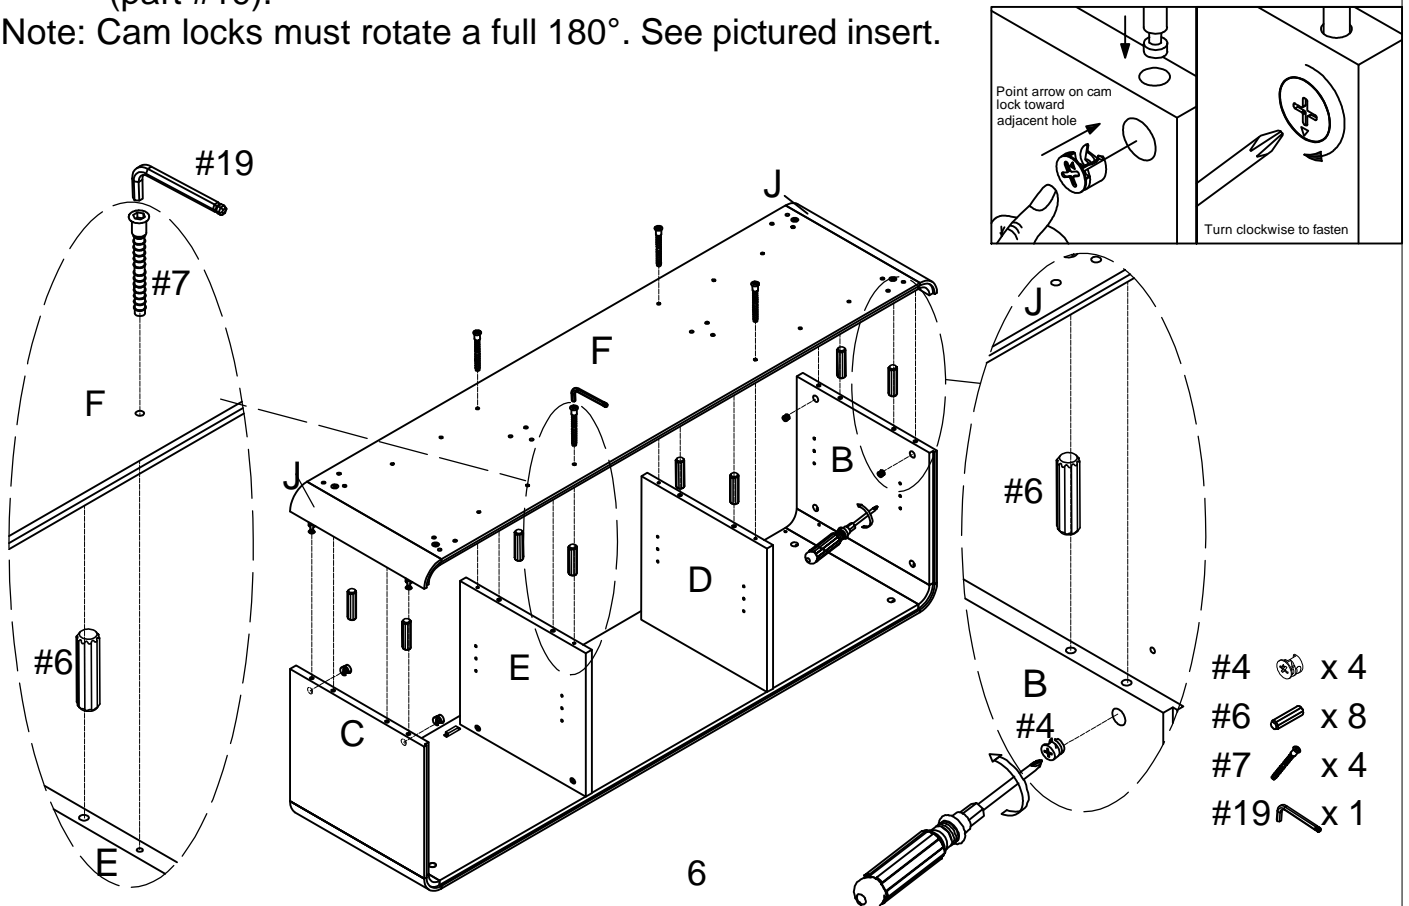


#4  x 4

#6  x 8


#7  x 4

#19  x 1

Step 7. Attach metal plates (part #14) to bottom panel (part F) using flat head bolts (part #15) and allen wrench (part #19). Attach legs (parts M & N) to bottom panel (part F) using short bolts (part #9) and allen wrench (part #19).

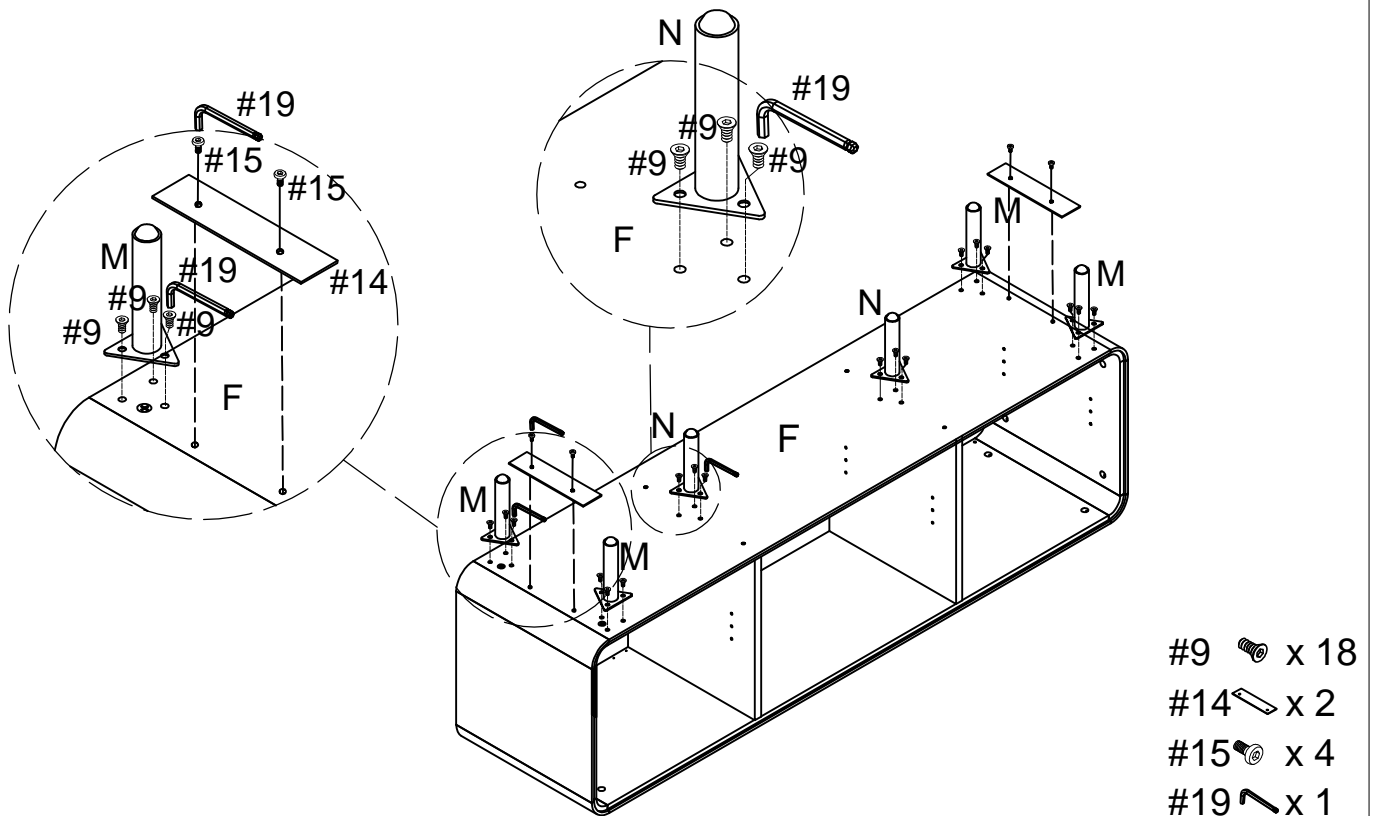


Step 8. Attach back panel (part I) to assembled unit (parts A, B, C, D, E & F) using screws (part #13) and phillips head screwdriver.

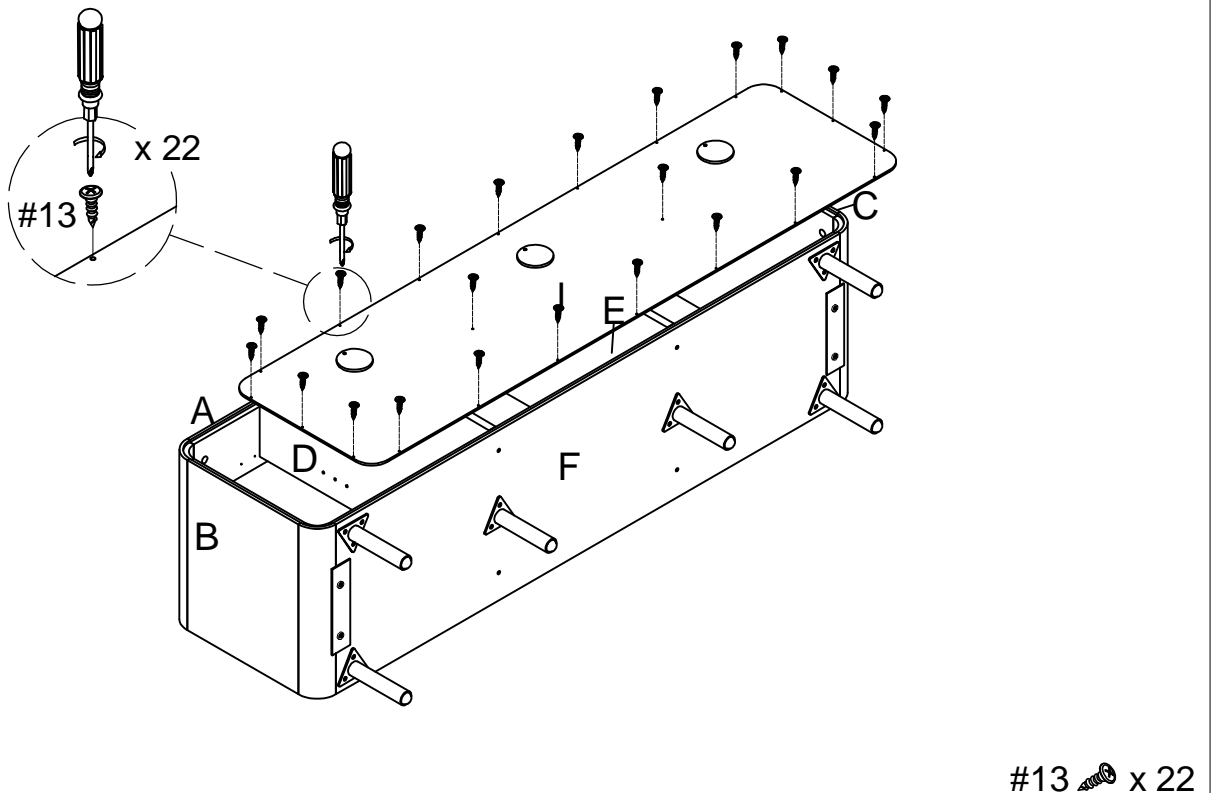

Step 9. There are two installation options.

SHELF INSTALLATION

Insert shelf holders (part #10) and slide adjustable shelves (parts K & L) into place.

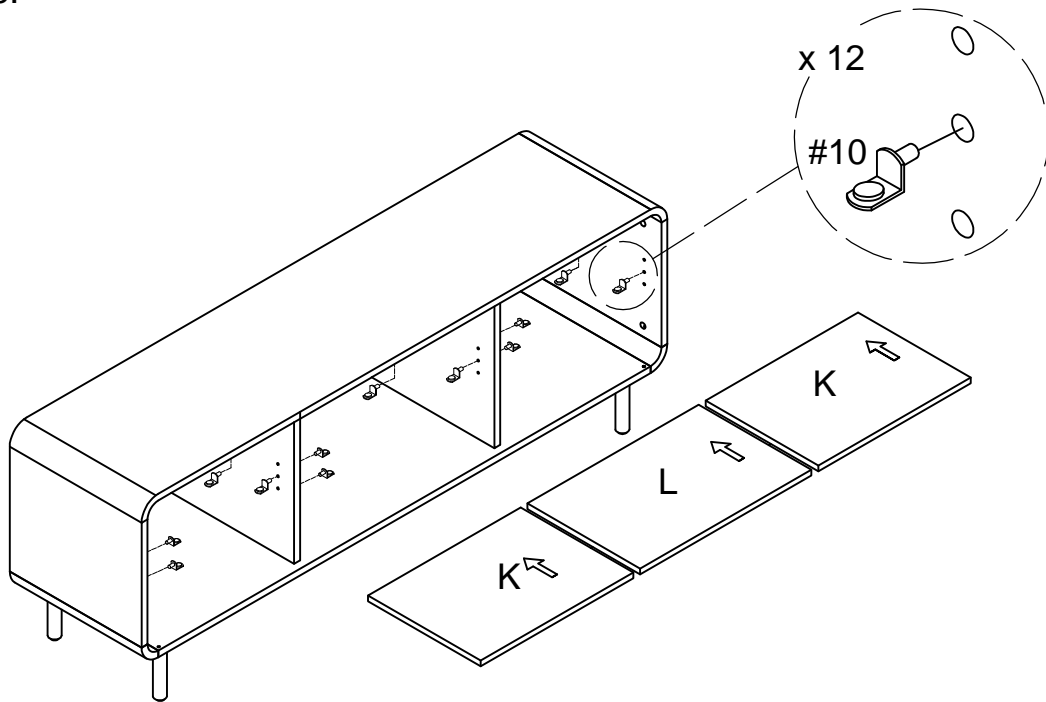



OR

METAL WIRE INSTALLATION

Carefully lay unit down. Attach metal wires (part P) to bottom panel (part F) using wrench (part #20) and hex nuts (part #21) .


#10  x 12

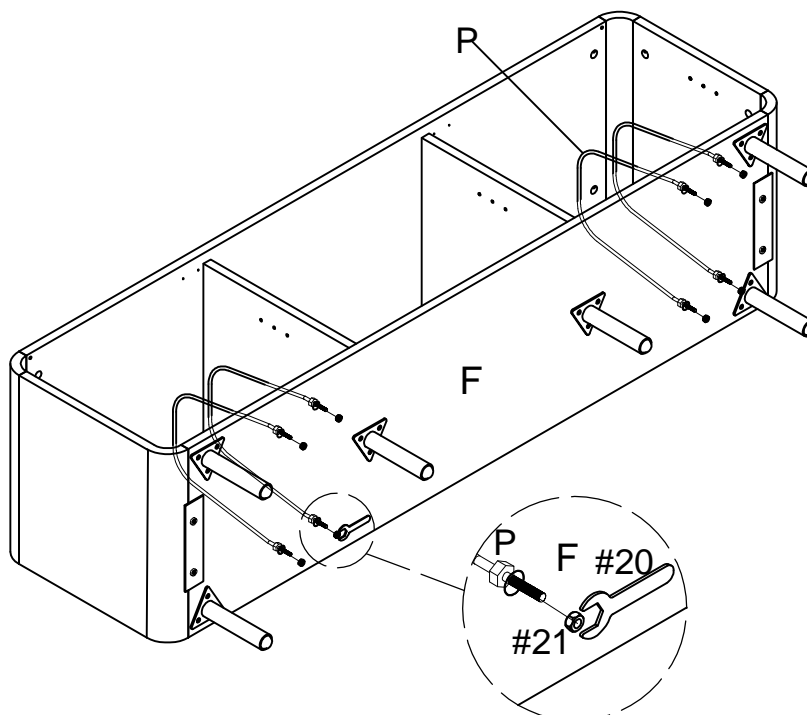

#20  x 1


#21  x 8

Step 10. Attach doors (parts G & H) by placing bottom pin hinge (pre-installed in door) in the pre-drilled hole of bottom panel (part F). Then depress the top spring-loaded pin hinge so it can be placed in the pre-drilled hole of top panel (part A).

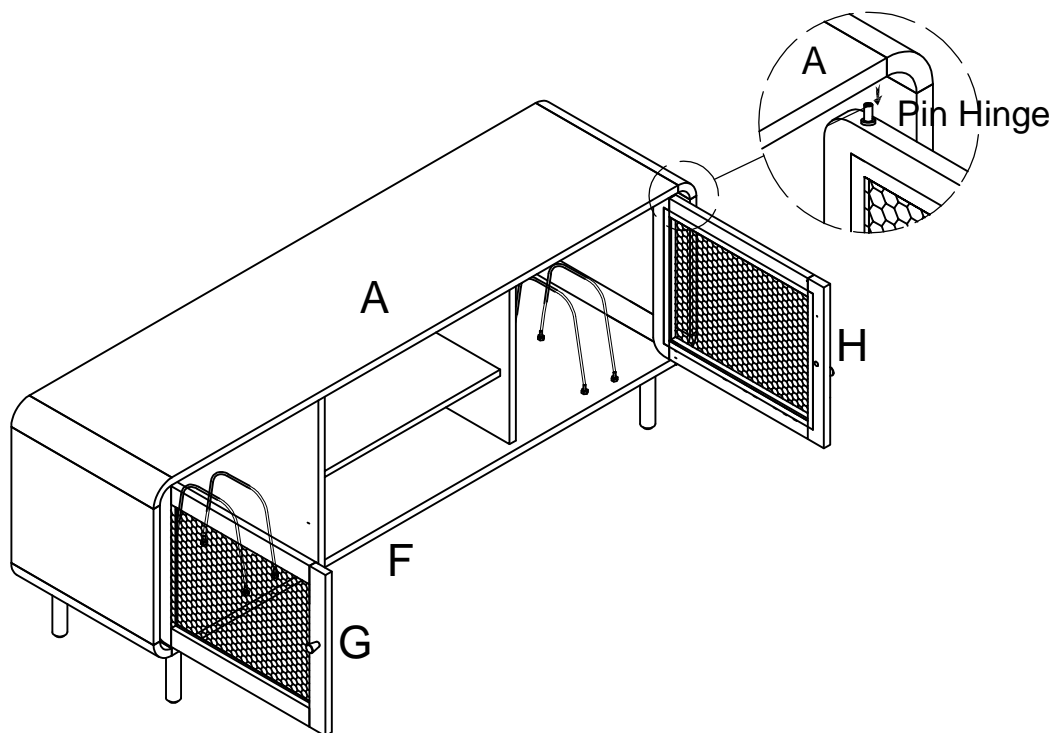

Step 11. Using cam stickers (part #16) cover all cam locks (part #4).

Note: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

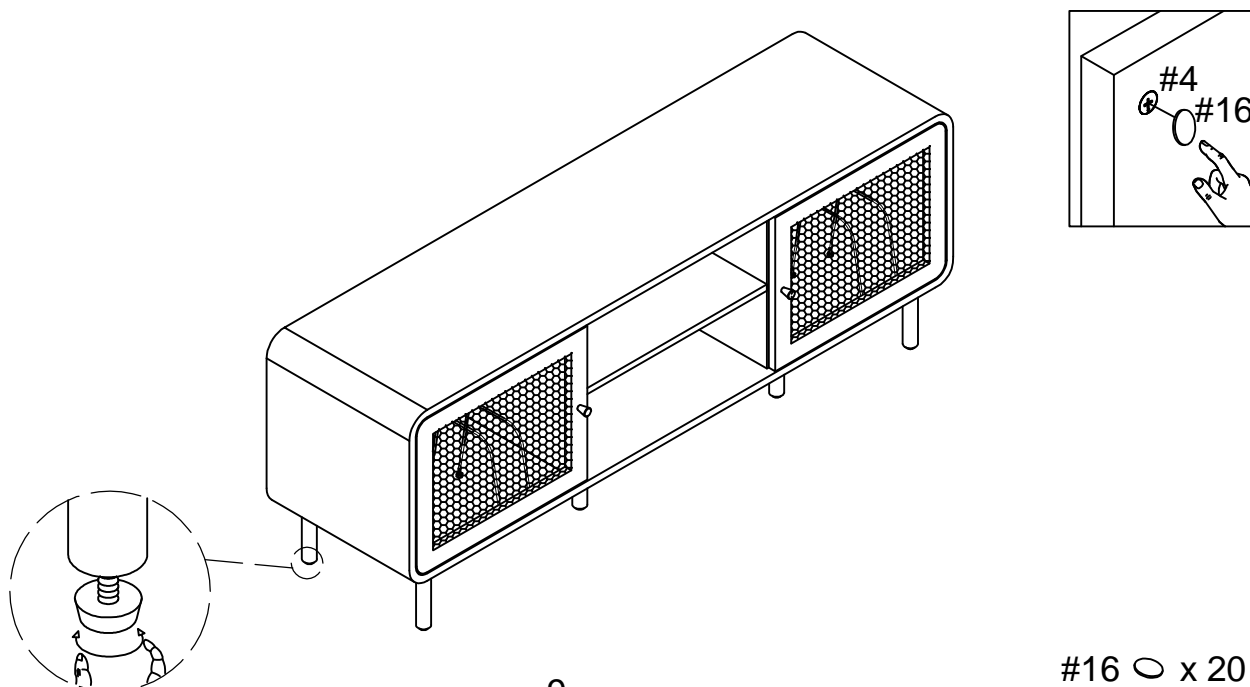

#16 ○ x 20