


User Manual

Function

- 4-bit LED display.
- Clock function: display hours, minutes, and can realize 12/24 hour
- Date function: display "Month", "Day", "Year" (from 2022 to 2121).
- Alarm function: set daily alarm and Snooze, 2 sets of alarm.
- Temperature function: the temperature can be displayed in °F or °C and switched. The normal range of measurement was -10 °C ~ 50 °C (14F ~ 122' F).
- Display Mode selection: Temperature Mode Long Press Mode key to switch display Mode.
- Brightness adjustment function: press the up flip button to adjust two levels of brightness, automatic semi-bright function: 18 : 00 - 6 : 00 brightness automatically dimmed, and can set the automatic semi-bright interval.
- Voice control function: only in AAA battery, can voice control to open display, bright 15 seconds after automatic screen.
- when the three dry batteries are powered by 4.5 V, the display screen will be illuminated after 15 seconds, and when the DC 5V is powered, the display screen will be long and bright.

Overview Function:

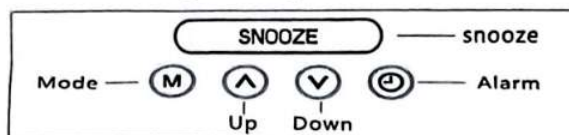

Operation Instructions:

Power-on, LED display about 2 seconds, enter normal clock mode, default: 2022.1.1, PM12:00, temperature display (default Celsius display).

Power on, LED display about 2 second

enter normal clock mode, default: PM12:00

Time Mode	Date mode	Temperature mode	Night mode	Alarm mode
12:00	10 1	25°C	OFF	AL1
Long press M, Press M, Convert to 12/24 hour	Long press M, Press M, Adjust "Year"	Press V, °C/°F conversion	Press M, select night mode ON/OFF	Press M, Press M, Select on/Off AL1, and light up
12Hr	2022	77°F	00	6:00
Press M, Press M, Adjust "Time"	Press M, Press M, Adjust "Month"	Long press M, display: SL, switch to circular display mode	Long press M, Press M, Set starting "Time" of night	Long press M, Press M, Set AL1 "Time"
24Hr	10 1	SL	18:00	6:00
Press M, Press M, Adjust "Minutes"	Press M, Press M, Adjust "Day"	Time shows 10 seconds	Press M, Press M, Set starting "Minutes" of night	Press M, Press M, Set AL1 "Minutes"
12:00	10 1	12:00	18:00	6:00
Press M again, return to the date display	Press M again, return to the date display	Date shows 3 seconds	Press M, Press M, Set night termination "Time"	Press M, Press M, Select AL1 working mode 1-7/1-5/1-6
12:00	10 1	10 1	6:00	6:00
Press M again, return to the time display		Temperature shows 3 seconds	Press M, Press M, Set night termination "Minutes"	Note: The setting method of AL2 is the same as that of AL1
12:00		25°C	6:00	AL2
		Long Press M again, show HO, turn off the cycle display, show the normal time	Press M again, return to the time display	
		HO	12:00	

Note:

1. All settings, when set, it is will flash.
2. When set, no keystroke operation within 1 minute, automatically return to the pre-set State.
3. Time non-setting state, date non-setting state, temperature mode, press M, adjust two levels of brightness.
4. When any alarm goes off, it will automatically return to that alarm mode and emit the sound of Didi Didi. The alarm logo will flash, and any button (except the snooze button) will stop ringing, no Button Operation Sound Alarm 1 minute stop alarm does not enter sleep, but alarm signs will not disappear.
5. When the alarm goes off, press SNOOZE and turn on Snooze 1 time, corresponding to the flashing of the alarm symbol. During snooze, press any key (except snooze button) to exit snooze.