





Hardware Package(included):



Ø12*100MM*1PCS

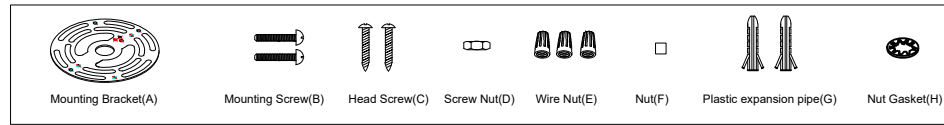

Ø12*250MM*3PCS

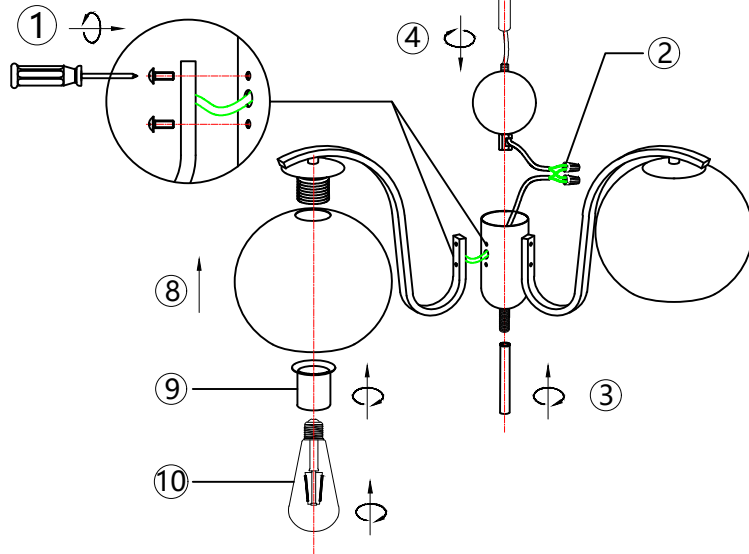

ASSEMBLY & INSTALLATION INSTRUCTIONS

WARNING: TO REDUCE THE RISK OF ELECTRICAL SHOCK, TURN OFF THE POWER AT THE CIRCUIT BREAKER OR FUSE BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Installation Steps

Turn off the power at fuse or circuit box

ASSEMBLY OF THE FIXTURE BODY

Please check that all accessories are included before starting installation.

Step 1: Insert the power cord from the fixture arm into the cylindrical lamp holder, then secure it using two screws.

Step 2: Connect the white wire from the lamp holder to the white wire from the fixture arm, and the black wire from the lamp holder to the black wire from the arm. Secure both connections with wire nuts.

Step 3: First install the internally threaded ring, then screw the straight rod into place to secure the decorative sphere and the cylindrical lamp holder.

Step 4: Select the appropriate suspension tube. Pass the main wire through it, screw it tightly into place, then attach the ceiling canopy (mounting plate) at the top.

Step 5: Use the two mounting screws to attach the mounting bracket to the outlet box on the ceiling.

Step 6: Pull the house wires from the outlet box. Make the following wire connections using wire nuts:

- Connect the fixture's black (hot) wire to the house's black (hot) wire.
- Connect the fixture's white (neutral) wire to the house's white (neutral) wire.
- Connect the fixture's bare copper (ground) wire to the house ground wire.
- Carefully tuck all wires into the outlet box.

Step 7: Attach the fixture body to the mounting bracket by aligning the holes in the back plate with the bracket. Insert the fixture screws and secure them with the two ball nuts.

Steps 8 – 9: Unscrew the metal ring from the E26 socket. Place the glass shade over the socket, then screw the metal ring back on to secure the glass.

Step 10: Install an E26 base bulb (not included). Please refer to the relamping label near the socket or on the packaging for the maximum allowed wattage.

Turn on the power—installation is now complete.

Attention

1. Installation should be performed by a licensed electrician.
2. Due to variations in display settings, the actual color may differ slightly from the images shown.
3. Because the lamp body is measured manually, there may be a deviation of up to 1/2 inch.
4. If there are any quality issues, missing parts, or other problems with the item, please feel free to contact us.