

ASSEMBLY INSTRUCTIONS

Bookcase

EEI-7167 / V1.05.05.25

modway



Questions? Contact us!
609.256.9000
cs@modway.com

Welcome.

Let's get started.

Before you begin, here are some things to keep in mind:

Assembly will take most people **about 60 minutes**. Consider having a friend help you!

Only use hand tools to assemble this item. Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.




















Care instructions are listed in the last step of this manual.

WAIT!




Missing parts or hardware? Need assistance?
Contact us before returning your item.
We're here to help!







HARDWARE INCLUDED IN THE BOX:

A.		Cam Bolt Ø6 x 32 mm	x32
B.		Cam Lock	x32
C.		Cover cap	x8
D.		Dowel Ø7.8 x 32 mm	x44
E.		Assembly screw	x7
F.		Screw Ø8 x 37 mm	x4
G.		Screw Ø6 x 12 mm	x18
H.		Screw Ø4 x 12 mm	x3
I.		Screw Ø6 x 19 mm	x24
J.		Wedge	x24
K.		Rear clamp	x3
L.		Allen key	x1
M.		Bolt M6 x 20 mm	x4
N.		Shelf pin	x16
O.		Screw Ø6 x 12 mm	x2
P.		Bumper	x4
Q.		Drawer runner A (R/L)	x1
R.		Drawer runner B (R/L)	x1
S.		Hole plug	x4

HARDWARE INCLUDED IN THE BOX:

T.		Top sliding door	x2
U.		Bottom sliding door	x2
V.		Wall tipping	x2

WHAT YOU NEED:

- 
Phillips
- 
- Phillips Head Screwdriver
- 
Flat Head
- 
- Flat Head Screwdriver

YOU MAY ALSO NEED:


- + Power Drill
- + Level

FURNITURE COMPONENTS INCLUDED IN THE BOX:

Page 4 of 18

All parts are numbered with a sticker according to this list.

1	Top panel	x1
2	Top bottom panel	x1
3	Front bottom support panel	x1
4	Back bottom support panel	x1
5	Right side panel	x1
6	Left side panel	x1
7	Divider panel	x1
8	Fix shelf panel	x1
9	Front crown	x1
10	Bottom apron	x1
11	Support top	x5
12	Side support	x2
13	Support fix shelf	x1
14	Top back panel	x1
15	Back panel	x2
16	Bottom back panel	x1
17	Adjustable shelf	x4
18	Door	x1
19	Front drawer	x1
20	Right side drawer	x1
21	Left side drawer	x1
22	Back drawer	x1
23	Bottom drawer	x1
24	Support bottom drawer	x1

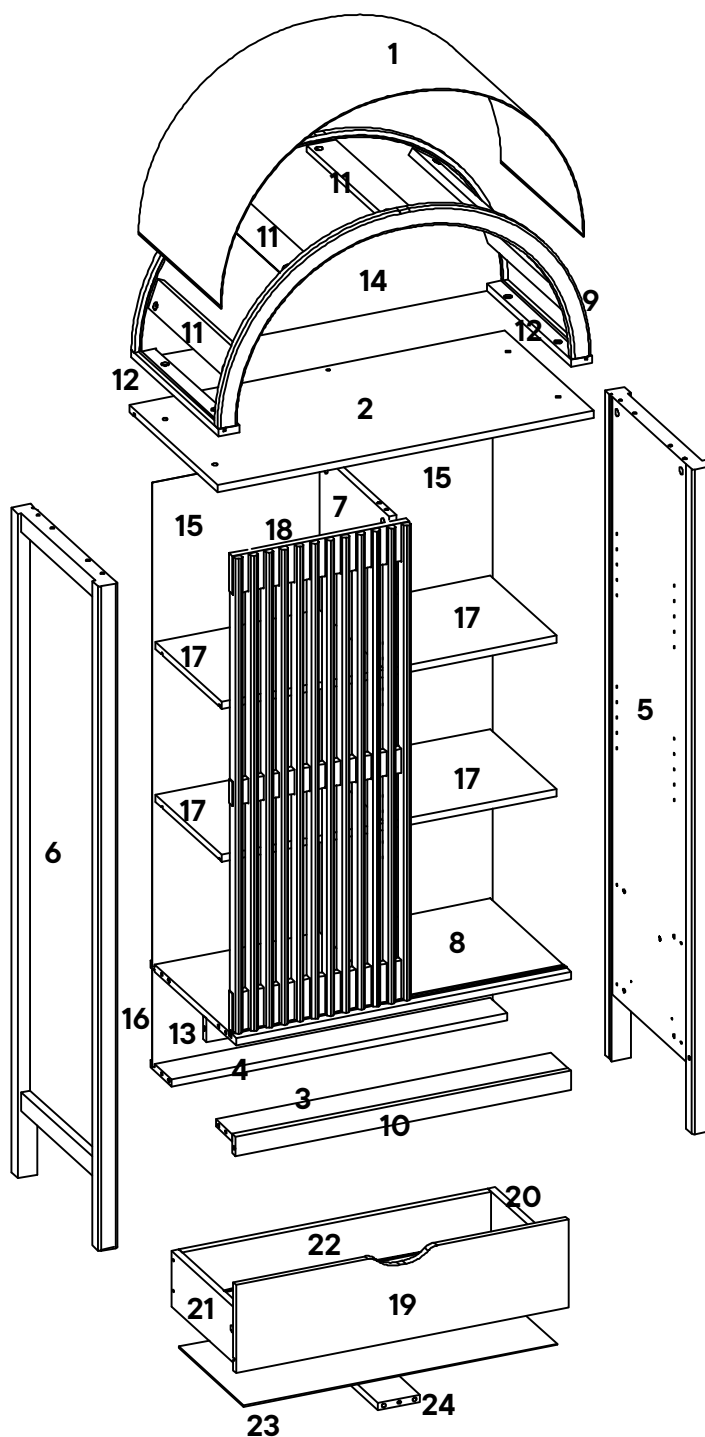

HARDWARE

- (A)** Cam Bolt Ø6 x 32 mm x2
(D) Dowel Ø7.8 x 32 mm x13

COMPONENTS


- (7)** Divider panel x1
(8) Fix shelf panel x1
(13) Support fix shelf x1

1.1 Insert 4x **Dowels (D)** into the holes on long edge of the **Divider Panel (7)**.

1.2 Insert 4x **Dowels (D)** into the holes on long edge of the **Fix Shelf Panel (8)**.

1.3 Insert and screw 2x **Cam Bolts (A)** into the bottom hole of the Fix Shelf Panel **(8)**.

1.4 Insert 5x **Dowels (D)** into the holes on long edge of the **Support Fix Shelf (13)**.

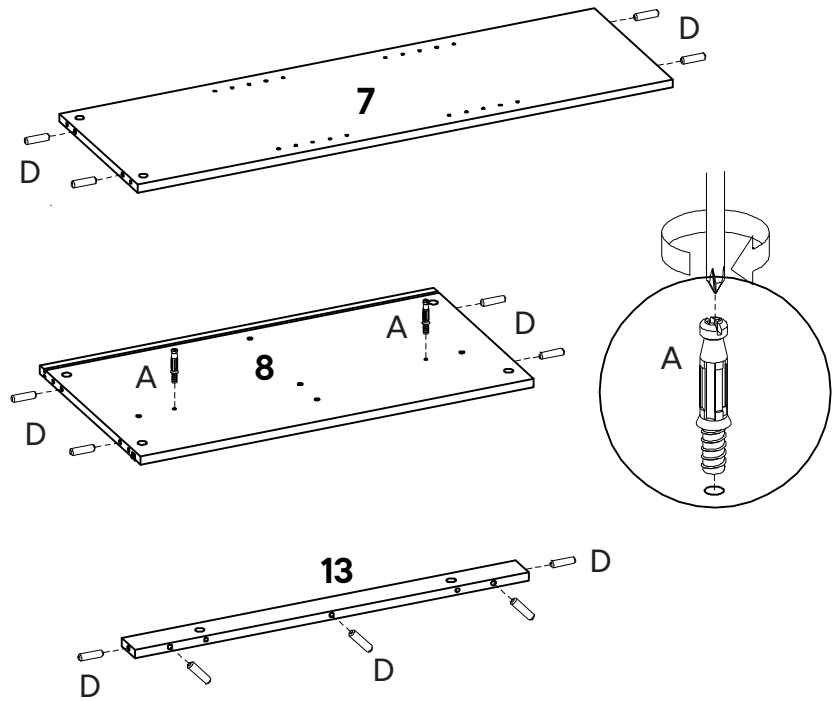

STEP 02

HARDWARE


- (B)** Cam Lock x2
(E) Assembly screw x2

COMPONENTS

- (7)** Divider panel x1
(8) Fix shelf panel x1
(13) Support fix shelf x1

2.1 Connect **Divider Panel (7)** onto **Fix Shelf Panel (8)** and secure it by tightening 2x **Assembly Screws (E)**.

2.2 Connect **Support Fix Shelf (13)** to the **Fix Shelf Panel (8)** by inserting 2x **Cam Locks (B)** to the corresponding holes.

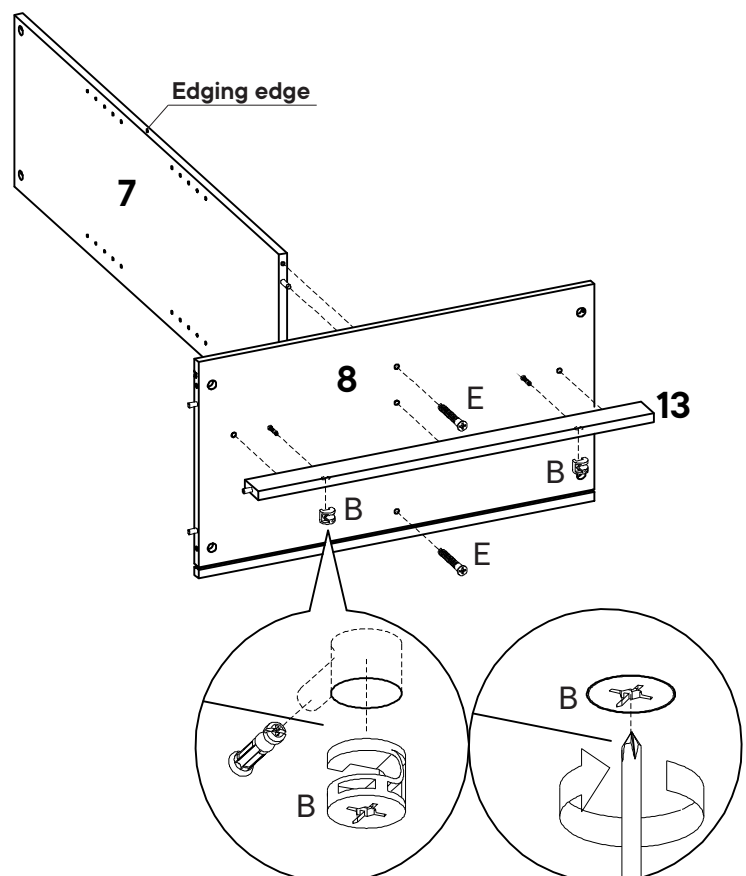

HARDWARE

- A** Cam Bolt Ø6 x 32 mm x2
D Dowel Ø7.8 x 32 mm x9

COMPONENTS




- 3** Front bottom support panel x1
4 Back bottom support panel x1
10 Bottom apron x1

3.1 Insert 5x **Dowels (D)** into the holes on long edge of the **Front Bottom Support Panel (3)**.

3.2 Insert 2x **Dowels (D)** into the holes on long edge of the **Back Bottom Support Panel (4)**.

3.3 Insert and screw 2x **Cam Bolts (A)** into the bottom hole of the Bottom Apron (**10**).

3.4 Insert 2x **Dowels (D)** into the holes on long edge of the **Bottom Apron (10)**.

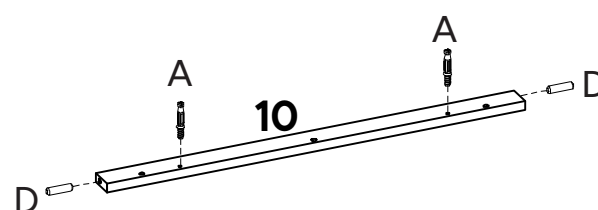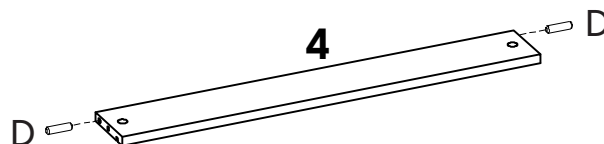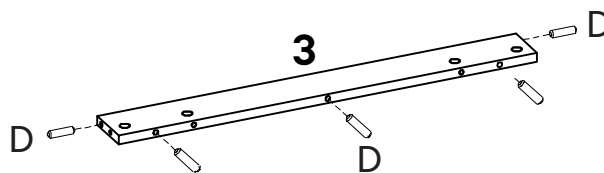

STEP 04



HARDWARE

- B** Cam Lock x2

COMPONENTS

- 3** Front bottom support panel x1
10 Bottom apron x1

4.1 Connect **Bottom Apron (10)** to the **Front Bottom Support Panel (3)** by inserting 2x **Cam Locks (B)** to the corresponding holes.

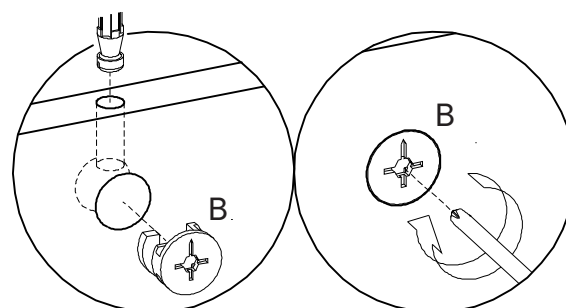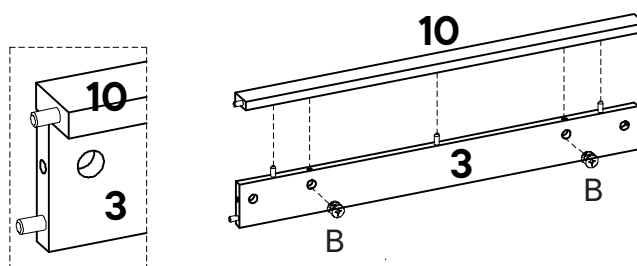

HARDWARE

A	Cam Bolt Ø6 x 32 mm	x8
D	Dowel Ø7.8 x 32 mm	x4
G	Screw Ø6 x 12 mm	x4
Q	Drawer runner A (R/L)	x1


COMPONENTS

5	Right side panel	x1
6	Left side panel	x1

5.1 Fasten 1 set **Drawer Runner A (Q)** with 4x **Screws Ø6 x 12 mm (G)** onto the **Right Side Panel (5)** & **Left Side Panel (6)**.

5.2 Insert and screw 8x **Cam Bolts (A)** into the bottom hole of the **Right Side Panel (5)** & **Left Side Panel (6)**.

5.3 Insert 4x **Dowels (D)** into the holes on long edge of the **Right Side Panel (5)** & **Left Side Panel (6)**.

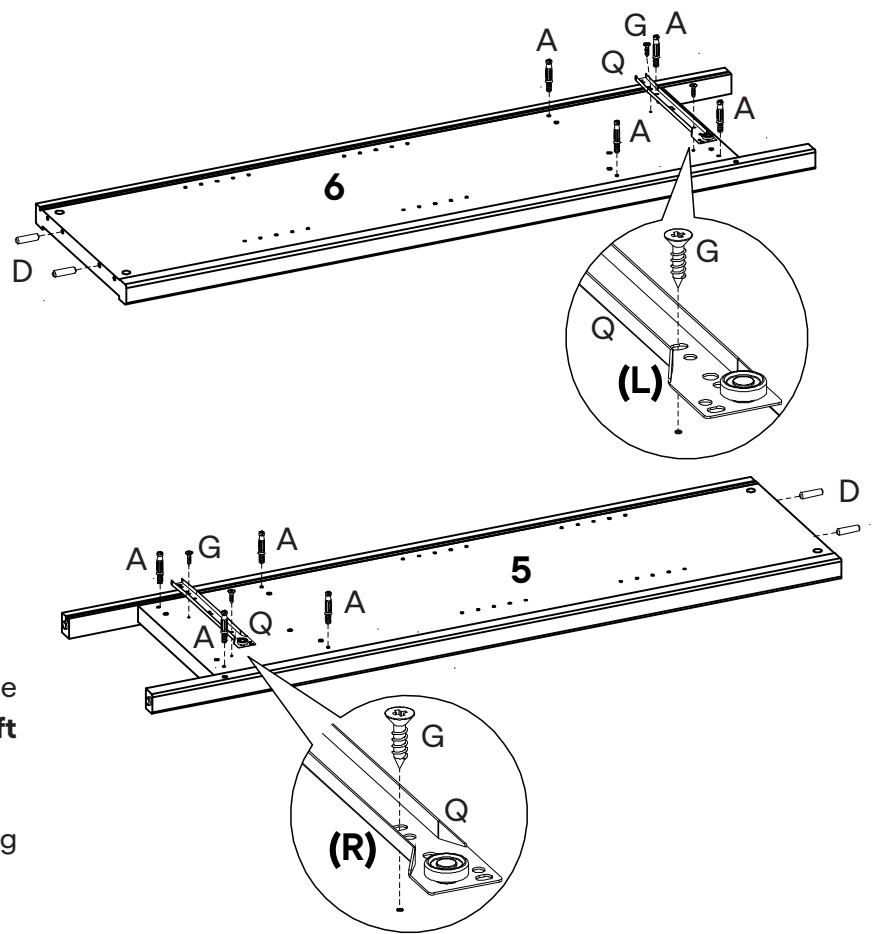

STEP 06

HARDWARE


B	Cam Lock	x4
----------	----------	----

COMPONENTS

4	Back bottom support panel	x1
5	Right side panel	x1

6.1 Connect **Right Side Panel (5)** to the **Assembled Unit** by inserting 2x **Cam Locks (B)** to the corresponding holes.


6.2 Connect **Back Bottom Support Panel (4)** & **panel (3)** to the **Assembled Unit** by inserting 2x **Cam Locks (B)** to the corresponding holes.

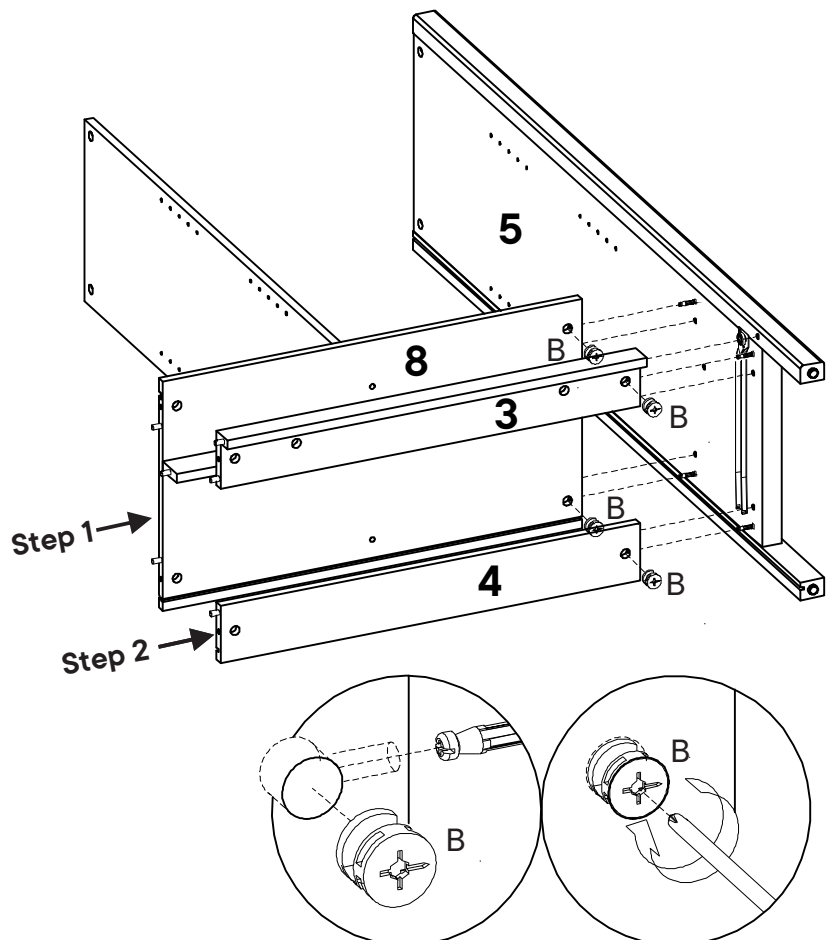

COMPONENTS

16 Bottom back panel x1

7.1 Slide **Bottom Back Panel (16)** into grooves of Assembled Unit as shown.

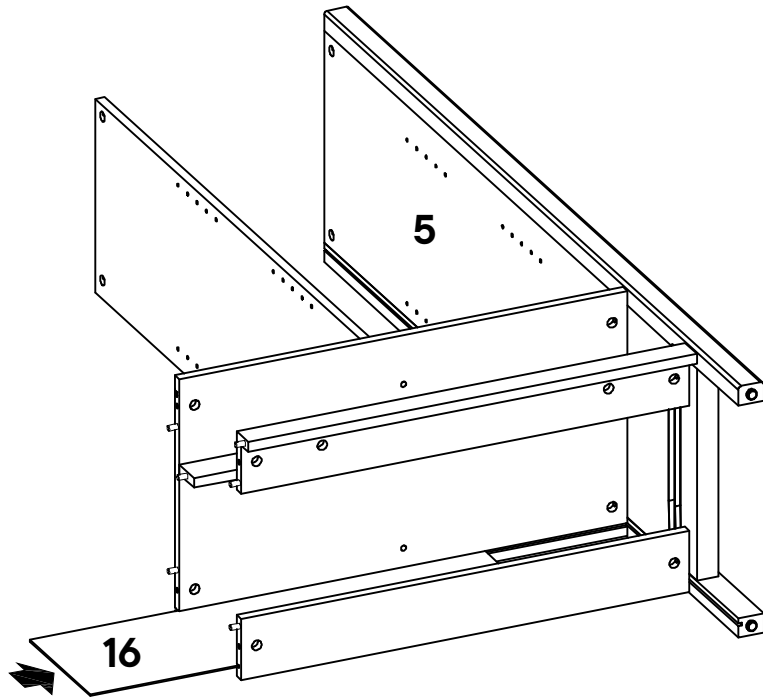

STEP 08



HARDWARE

B Cam Lock x4

COMPONENTS

6 Left side panel x1


8.1 Connect **Left Side Panel (6)** to the **Assembled Unit** by inserting 4x **Cam Locks (B)** to the corresponding holes.

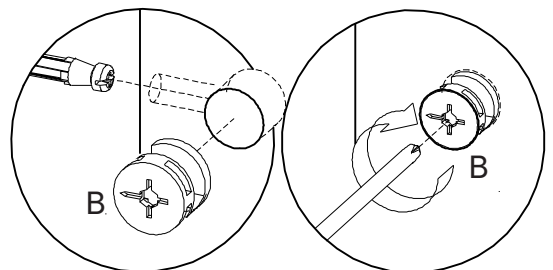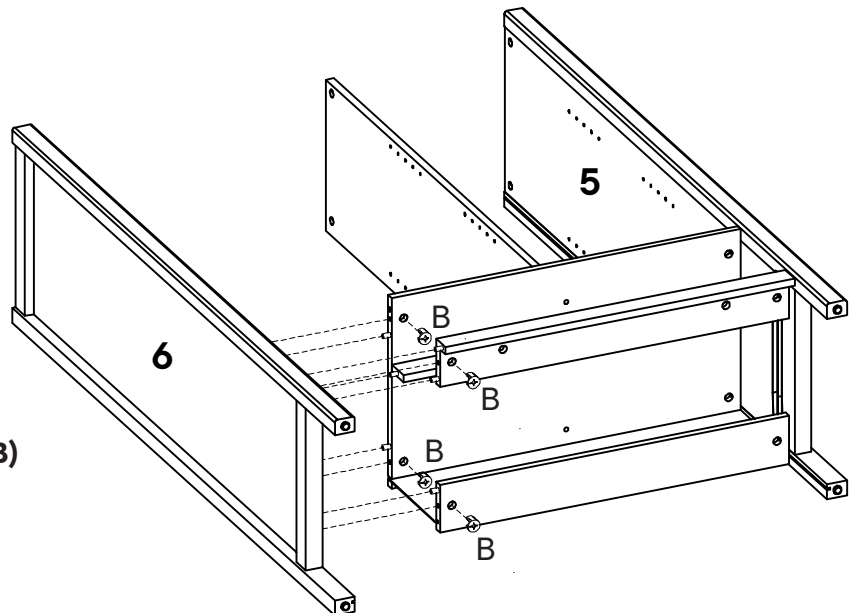

COMPONENTS

15 Back panel x2

19.1 Slide 2x **Back Panel (15)** into grooves of Assembled Unit as shown.

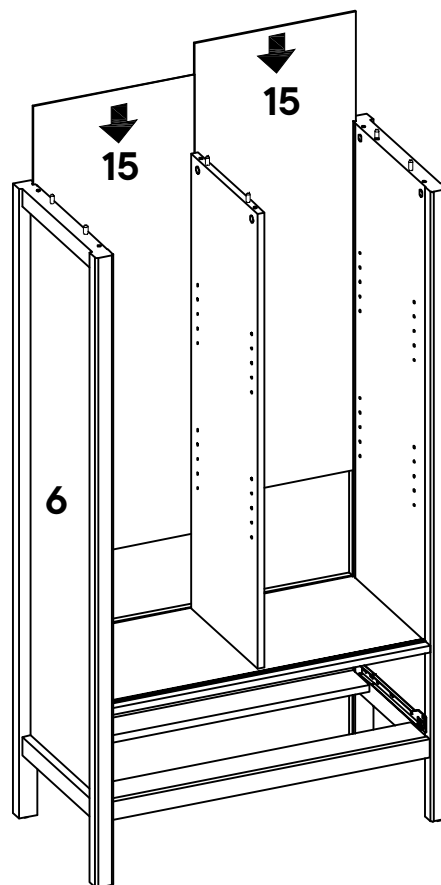

STEP 10

HARDWARE

A Cam Bolt Ø6 x 32 mm x10
D Dowel Ø7.8 x 32 mm x10


COMPONENTS

9 Front crown x1
11 Support top x5
14 Top back panel x1

10.1 Insert and screw 5x **Cam Bolts (A)** into the bottom hole of the Top Back Panel (**14**).


10.2 Insert and screw 5x **Cam Bolts (A)** into the bottom hole of the Front Crown (**9**).

10.3 Insert 2x **Dowels (D)** into the holes on long edge of the **Support Top (11)**. Repeat this step on the same components.

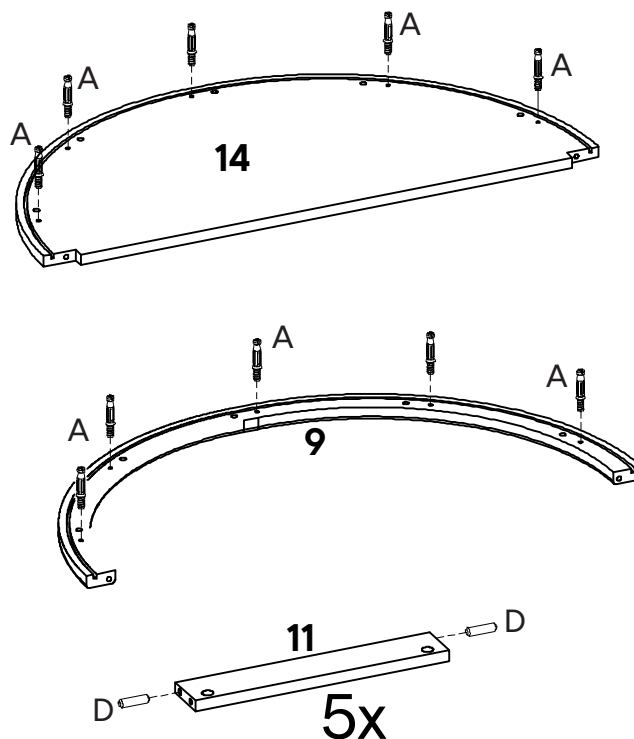


HARDWARE**B** Cam Lock x10**COMPONENTS****9** Front crown x1**11** Support top x5**14** Top back panel x1

11.1 Connect **Support Top (11)**, onto **Front Crown (9)** & **Top Back Panel (14)** by inserting 10x **Cam Locks (B)** to the corresponding holes.

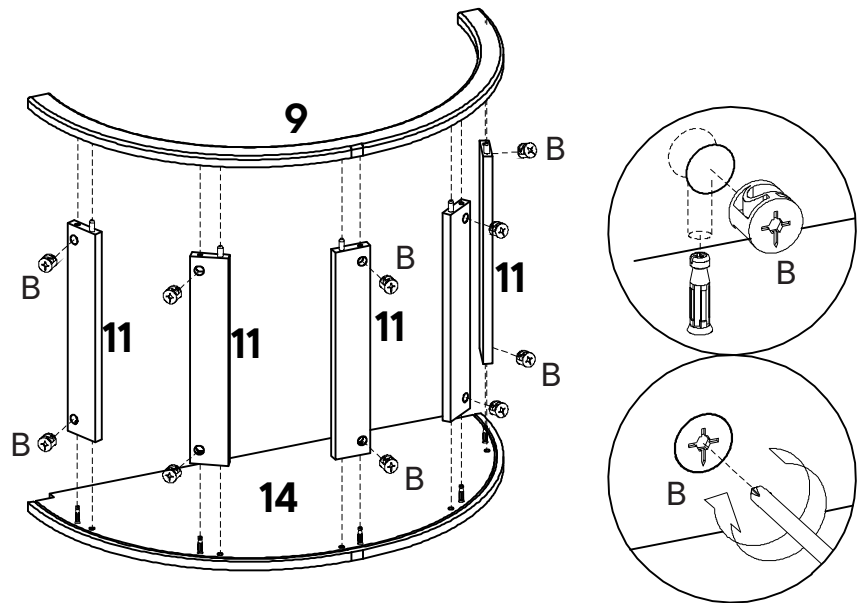

STEP 12

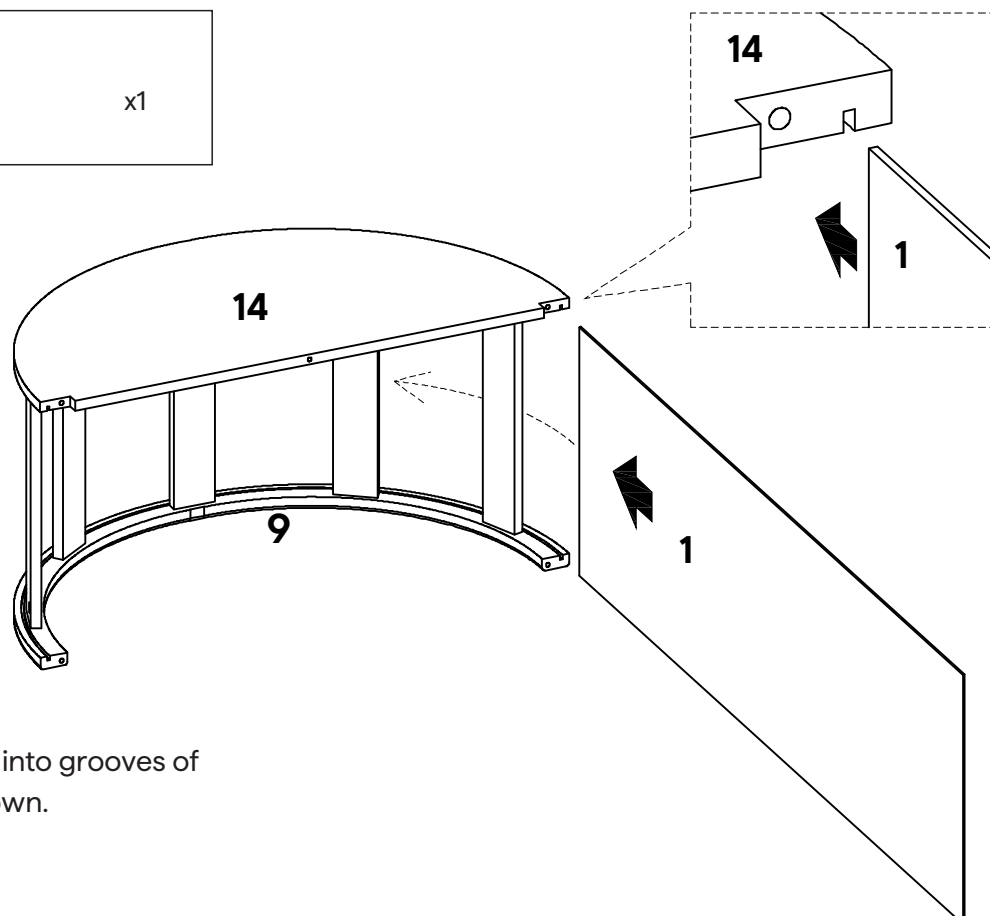COMPONENTS**1** Top panel x1

12.1 Slide **Top Panel (1)** into grooves of Assembled Unit as shown.


HARDWARE

(E) Assembly screw x4

COMPONENTS

(12) Side support x2

13.1 Connect 2x Side Support (12) onto Assembled Unit with and secure it by tightening 4x **Assembly Screw (E)**.

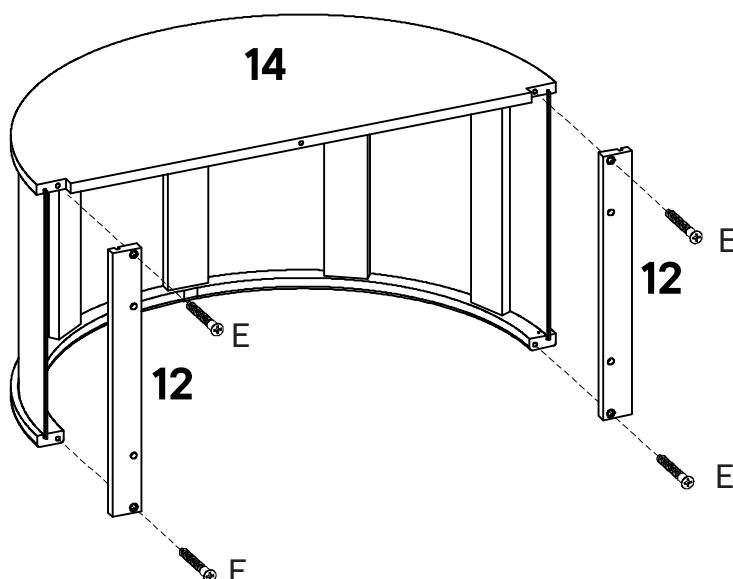

STEP 14

HARDWARE

(A) Cam Bolt Ø6 x 32 mm x6

(E) Assembly screw x1


(L) Allen key x1

(M) Bolt M6 x 20 mm x4

(S) Hole plug x4

COMPONENTS

(2) Top bottom panel x1

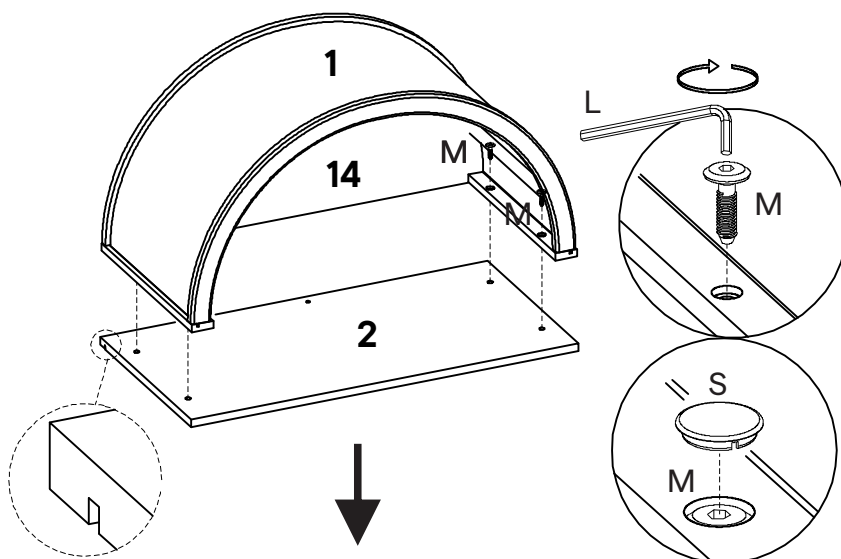


14.1 Fasten **Top Bottom Panel (2)** onto the Assembled Unit with and secure it by tightening 4x Bolts **(M)** with Allen Key **(L)**

14.2 Place 4x **Hole Plug (S)** onto the **Bolts (M)**.

14.3 Insert and screw 6x **Cam Bolts (A)** into the bottom hole of the Assembled unit.

14.4 Fasten with **Assembly Screws (E)** onto the Assembled Unit.


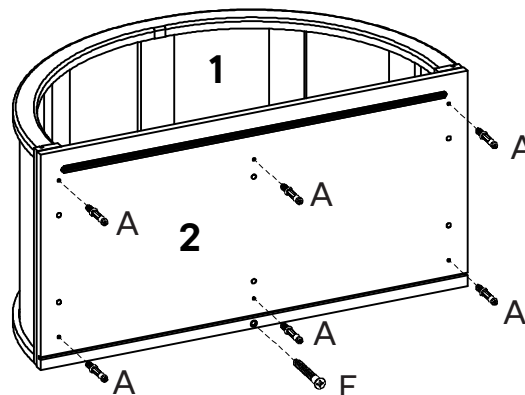


HARDWARE

B	Cam Lock	x6
C	Cover cap	x6

15.1 Connect **Top Assembled** onto Base Assembled by inserting 6x **Cam Locks (B)** to the corresponding holes.

15.2 Place 6x **Cover cap (C)** onto the camlock.

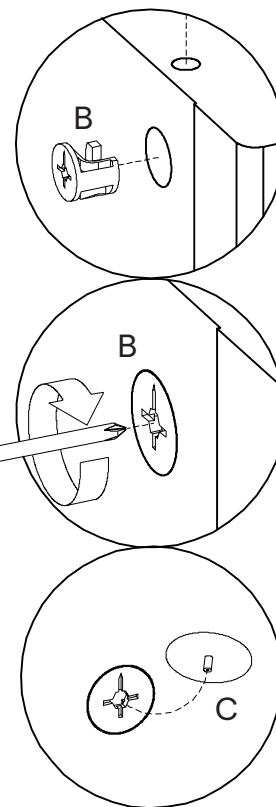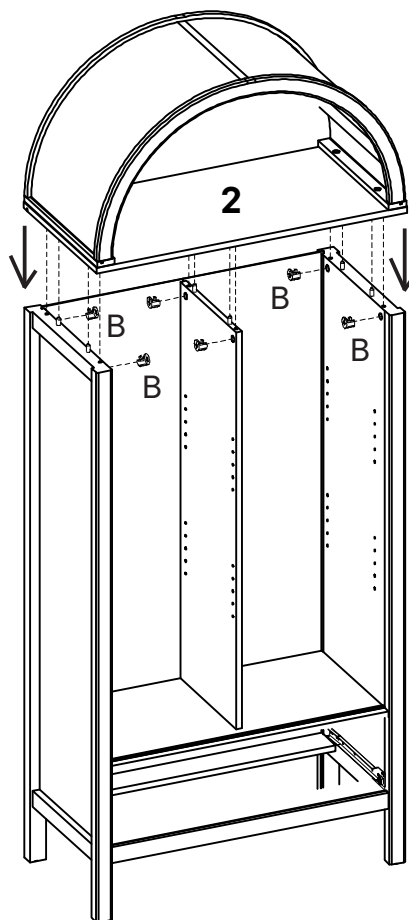





STEP 16

HARDWARE

H	Screw Ø4 x 12 mm	x3
I	Screw Ø6 x 19 mm	x22
J	Wedge	x22
K	Rear clamp	x3

16.1 Fasten 22x **Wedge (J)** with **22x Screws (I)** onto Assembled Unit .

16.2 Fasten 3x **Rear Clamp (K)** with **3x Screws (H)** onto Assembled Unit .

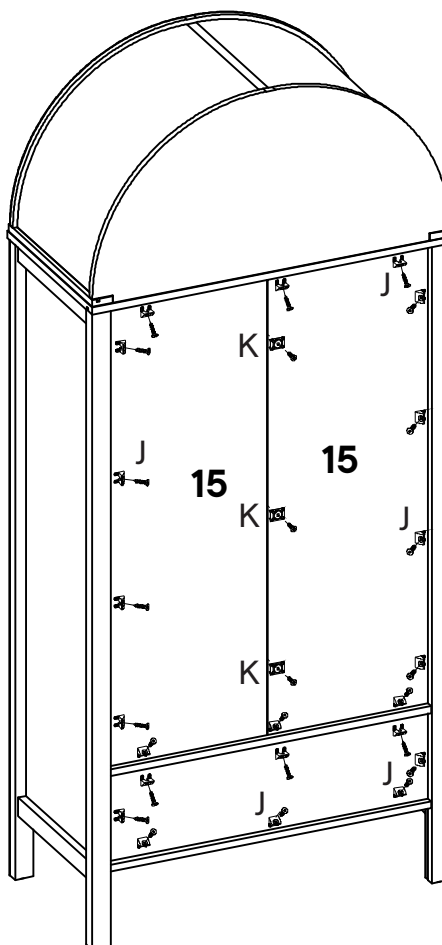

HARDWARE


(N) Shelf pin x16

COMPONENTS

(17) Adjustable shelf x4

17.1 Insert 16x **Shelf Pins (N)** into Side and in the desired positions.

17.2 Slide 4x **Adjustable Shelf (17)** and diagonally in and rest on the **Shelf Pins**.

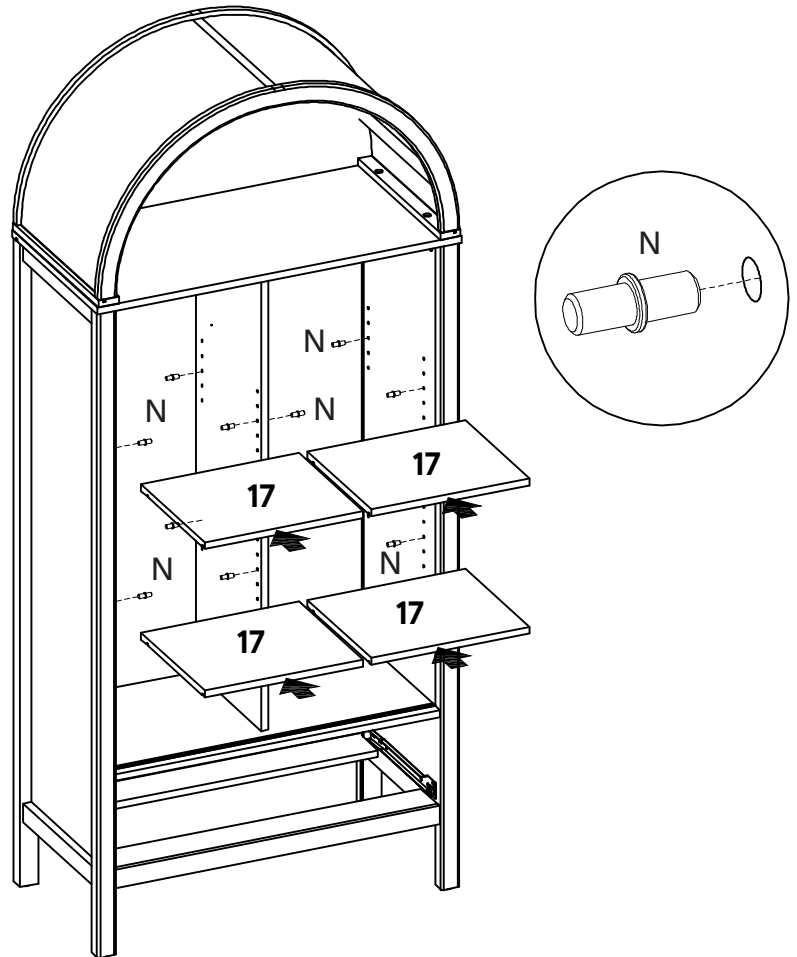

STEP 18

HARDWARE

(18) Door x1


COMPONENTS

(G) Screw Ø6 x 12 mm x8

(T) Top sliding door x2


(U) Bottom sliding door x2

18.1 Fasten 2x **Top Sliding Door (T)** and 2x **Bottom Sliding Door (U)** with 8x **Screws (G)** onto the **Door (18)**.

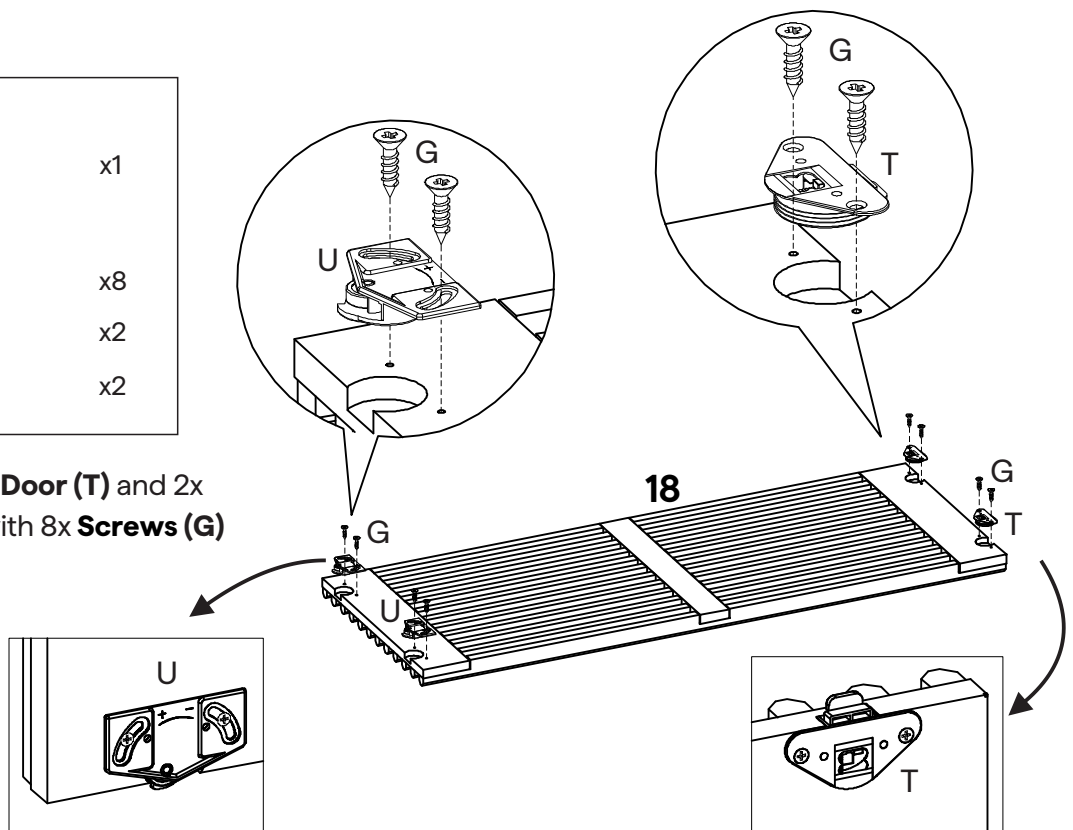

STEP 19

19.1 Attach the **Door** to the Assembled unit according to the installation details provided in the drawing.

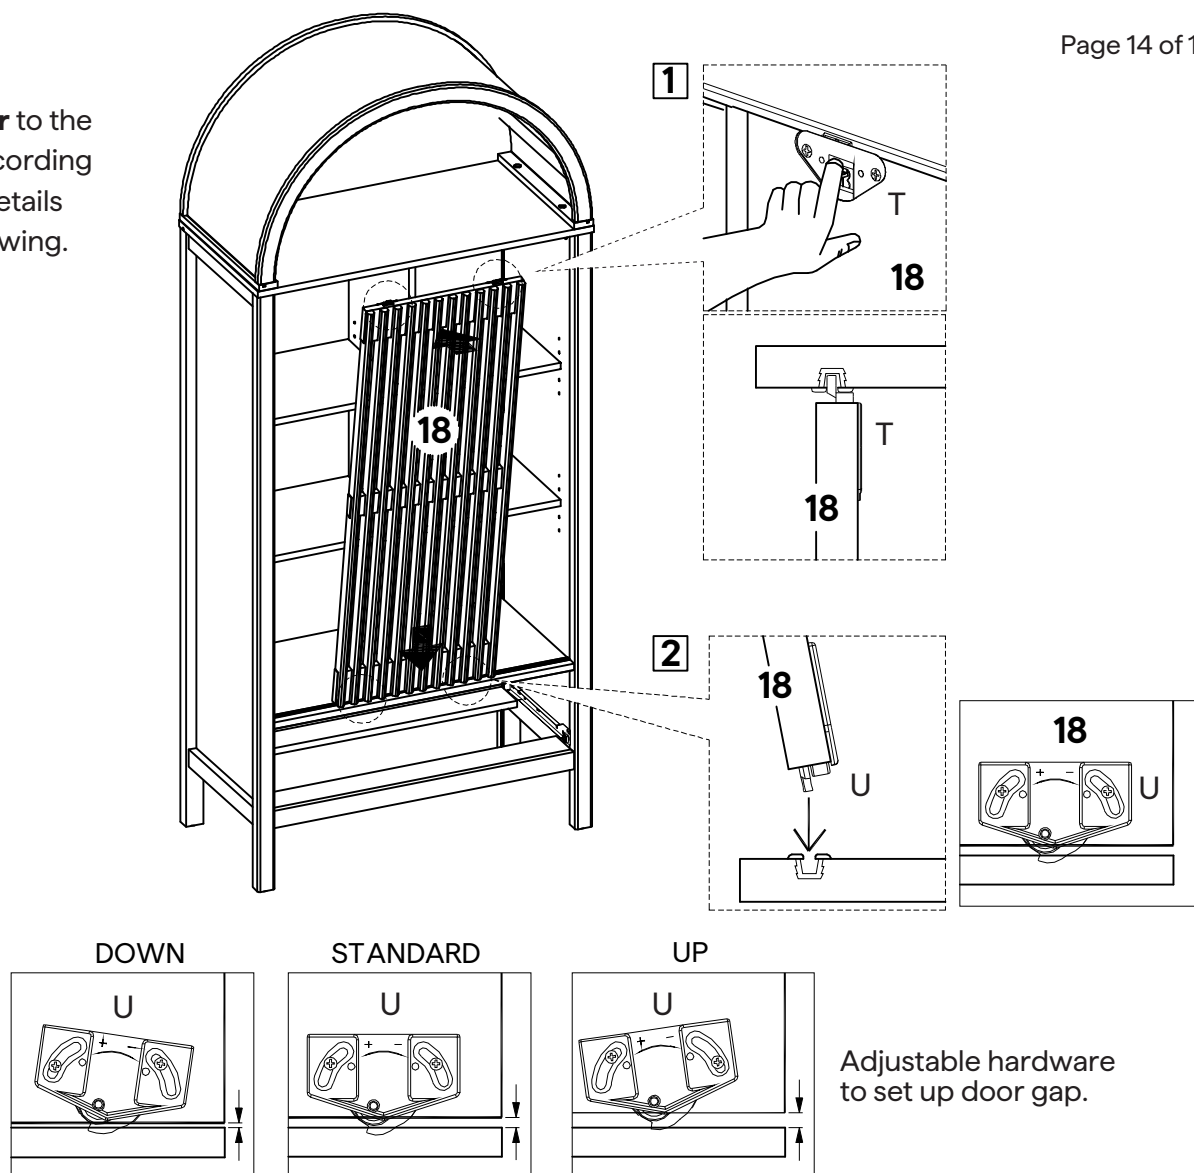


STEP 20

HARDWARE

- A** Cam Bolt Ø6 x 32 mm x4
- D** Dowel Ø7.8 x 32 mm x8

COMPONENTS

- 19** Front drawer x1
- 20** Right side drawer x1
- 21** Left side drawer x1
- 22** Back drawer x1
- 24** Support bottom drawer x1

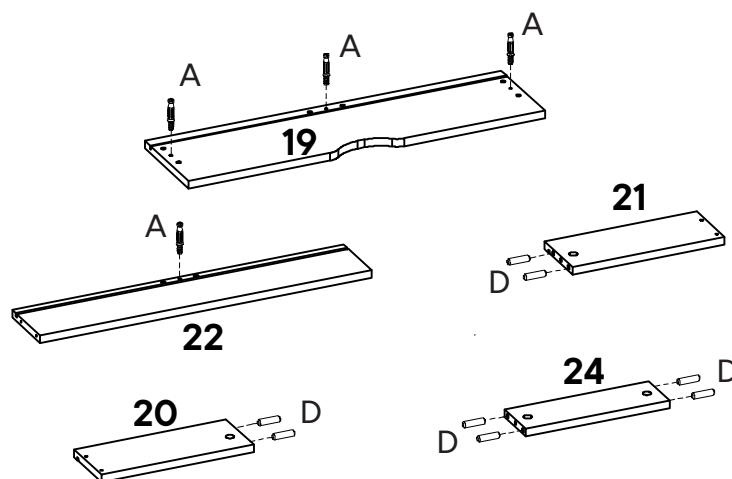

20.1 Insert and screw 4x **Cam Bolts (A)** into the bottom hole of the **Front Drawer (19) & Back Drawer (22)**.

20.2 Insert 8x **Dowels (D)** into the holes of the **Right Side Drawer (20), Left Side Drawer (21) & Support Bottom Drawer (24)**.

HARDWARE


- (B)** Cam Lock x1
(F) Screw Ø7 x 37 mm x4

COMPONENTS

- (20)** Right side drawer x1
(21) Left side drawer x1
(22) Back drawer x1
(24) Support bottom drawer x1

21.1 Connect Right Side Drawer (20) & Left Side Drawer (21) onto Back Drawer (22) with and secure it by tightening 4x **Screws (F)**.

21.2 Connect **Support Bottom Drawer (24)** to the **Assembled Unit** by inserting **Cam Lock (B)** to the corresponding holes.

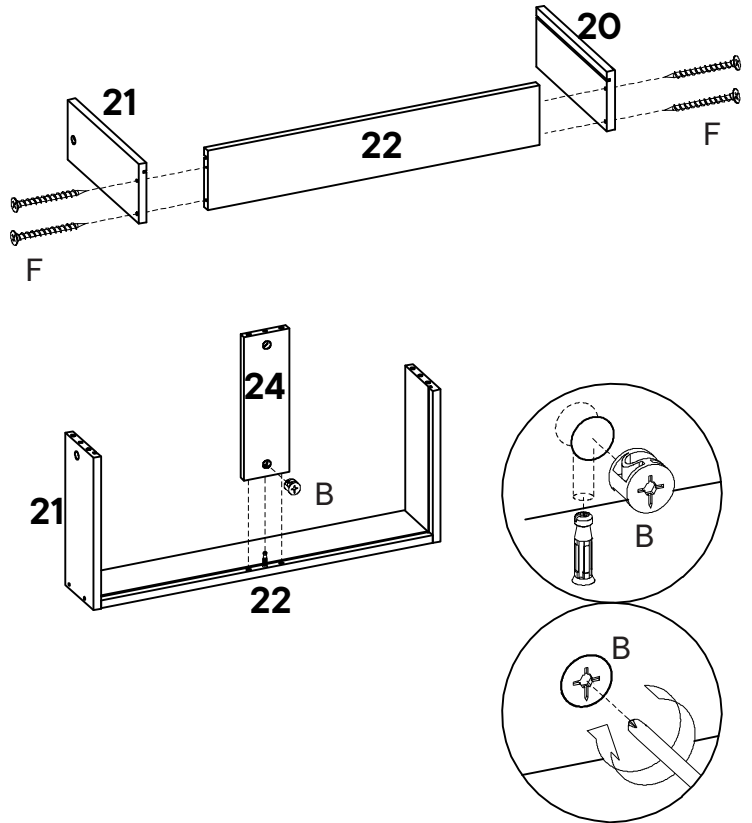

STEP 22

HARDWARE

- (B)** Cam Lock x3
(C) Cover cap x2


COMPONENTS

- (19)** Front drawer x1
(23) Bottom drawer x1

22.1 Slide **Bottom drawer (23)** into grooves of Assembled Unit as shown.

22.2 Connect **Front Drawer (19)** to the **Assembled Unit** by inserting 3x **Cam Locks (B)** to the corresponding holes.

22.3 Place 2x Cover Cap (C) onto Right & Left Side Drawer

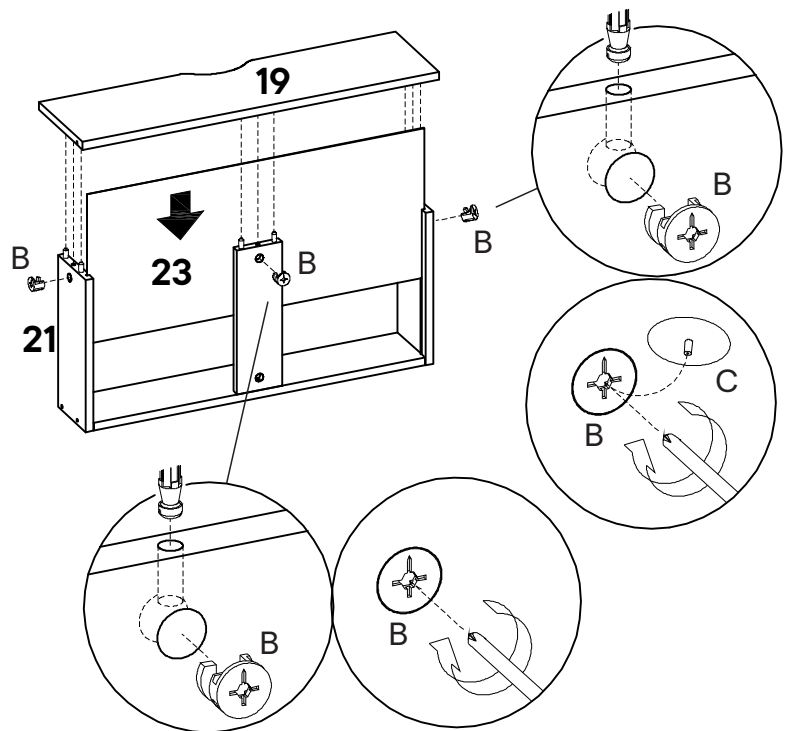


HARDWARE

G	Screw Ø6 x 12 mm	x4
I	Screw Ø6 x 19 mm	x2
J	Wedge	x2
R	Drawer runner B (R/L)	x1

23.1 Fasten 2x **Wedge (J)** with 2x **Screws (I)** onto Assembled Unit .

23.2 Fasten 1x **Drawer Runner B (R)** with 4x **Screws (G)** onto the Assembled Unit .

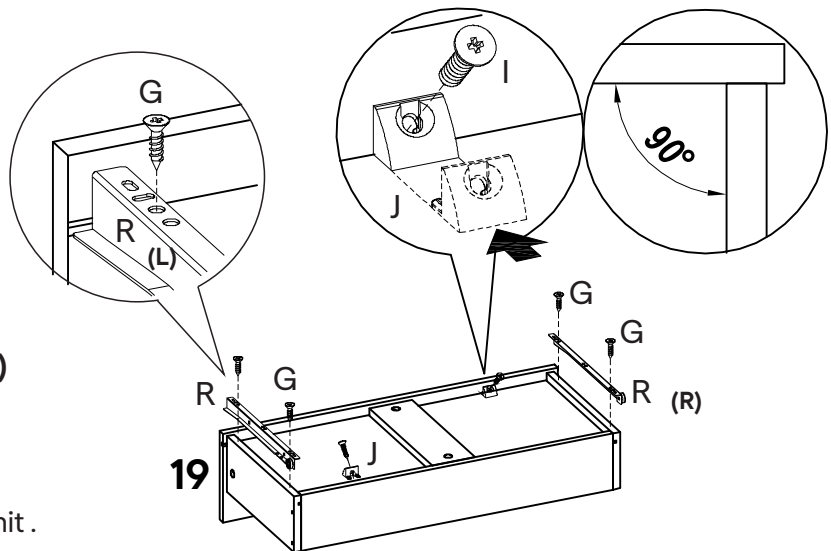

STEP 24



HARDWARE

G	Screw Ø6 x 12 mm	x2
----------	------------------	----

24.1 Insert drawers into the Cabinet as shown.

24.2 In the event of misaligned Drawer or Drawer hit the bottom panel. To adjust gaps around the Drawer, first remove the Drawer. Loosen screws on the runners and adjust Drawer Runners to the up or down direction.



24.3 When the drawer front (19) are correctly aligned, re-tighten screws on the runners. Lock the runners in place by fastening additional Screw (**G**) to each runner as shown.

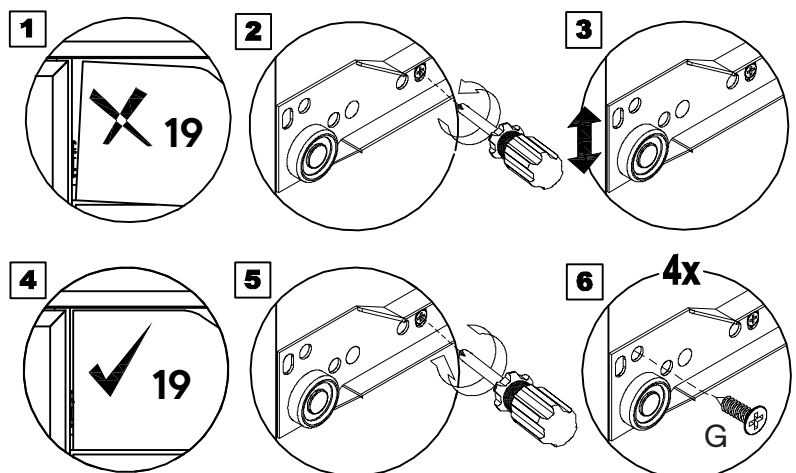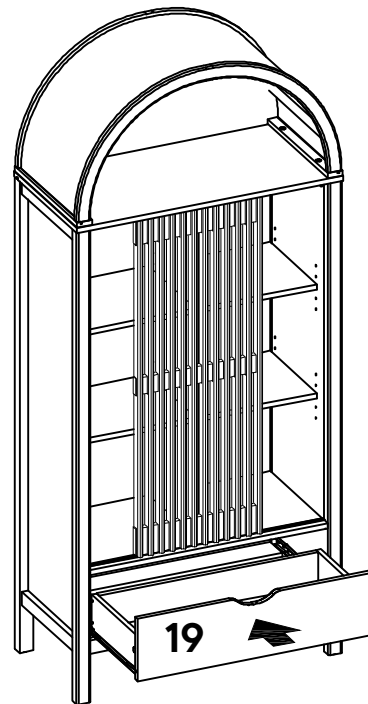

HARDWARE

P Bumper x4

25.1 Place 4x **Bumpers (P)** onto Right & Left side Door.

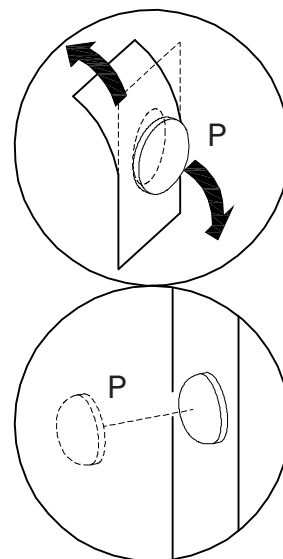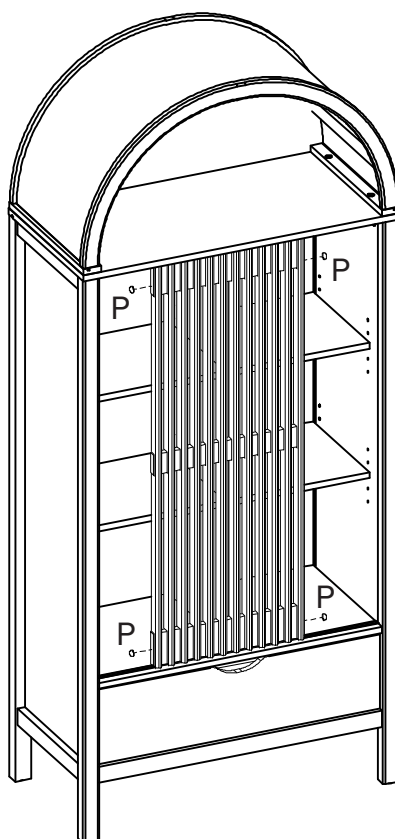

STEP 26

HARDWARE



V Wall Tipping x2

O Screw Ø6 x 12 mm x2

26.1 Fasten 2x **Wall Tipping (V)** onto the Assembled Unit with and secure it by tightening 2x **Screws (O)**.

Important : For your safety it is imperative to fix your furniture to the wall.

Please consult your local hardware store to ensure you are using the correct hardware for your wall type.

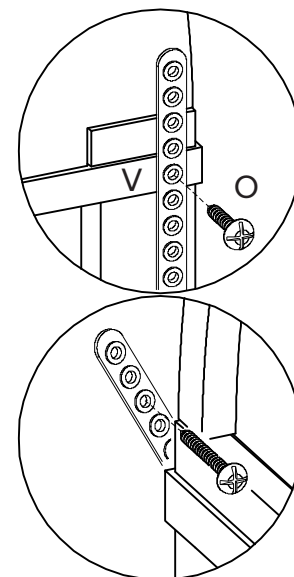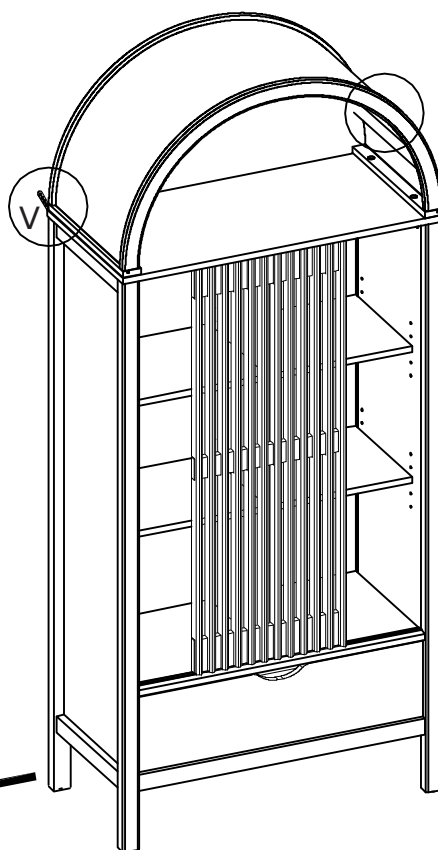


Great job!

Bookcase assembly is complete.

CARING FOR YOUR ITEM

- Indoor use only.
- Not contract grade.
- Clean using a non-abrasive cloth and a mild cleaner.
- Never use harsh chemicals, as they could damage the finish or integrity of the item.

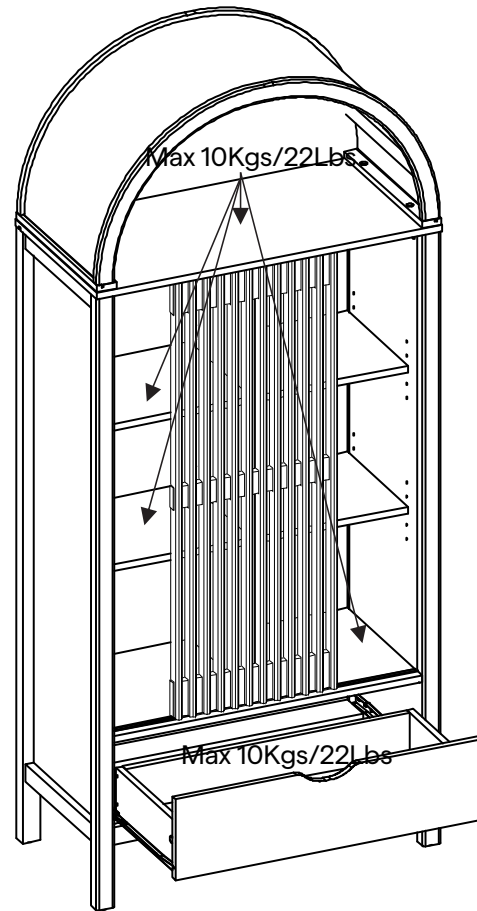

CONNECT WITH US!

Tag us **@modway_furniture** and **#modway** for a chance to be featured.

modway



Questions? Contact us!

609.256.9000

cs@modway.com