


Tempo 52" Electric Fireplace

Specifications Sheet & Framing Information



MODEL	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-FVX52	1312 mm	514 mm	165 mm	1230 mm x 381 mm	5000	2000 mm
	51 5/8 in.	20 1/4 in.	6 1/2 in.	48 1/2 in. x 15 in.		72 in.

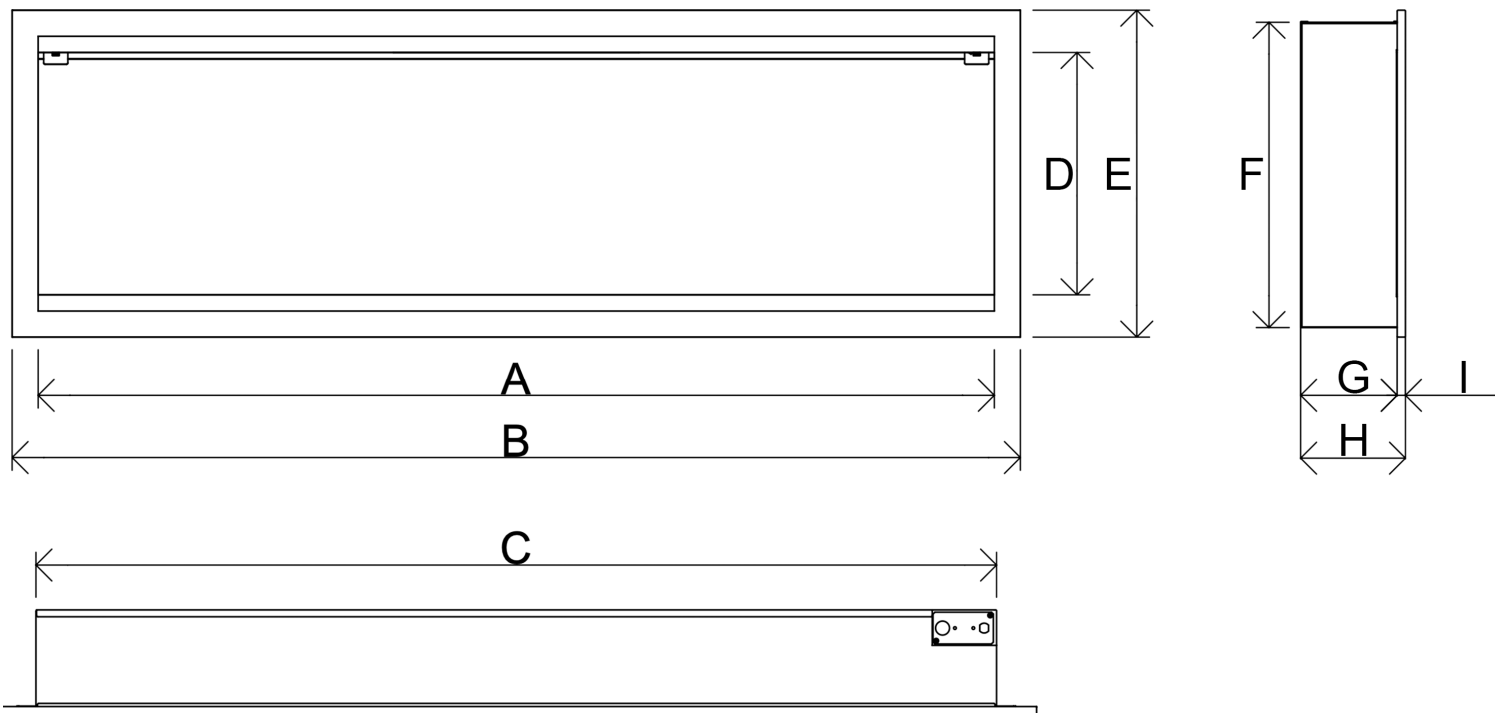

MODEL	A*	B	C*	D	E	F	G	H	I
DY-FVX52	1230 mm	1312 mm	1237 mm	381 mm	514 mm	480 mm	152 mm	165 mm	13 mm
	48 1/2 in.	51 5/8 in.	48 3/4 in.	15 in.	20 1/4 in.	19 in.	6 in.	6 1/2 in.	1/2 in.

*A & C includes louver projections

Electrical Specifications


MODEL	Circuit	Max Power Consumption	Flame & Lighting	Standby	Outlet	Certification
DY-FVX52	15A, 120V / 60Hz	1500 W	50.4 W	2 W	<ul style="list-style-type: none"> Standard (type B) Hardwire ready 	CSA

Tempo 52" Electric Fireplace


Specifications Sheet & Framing Information



CLEARANCES

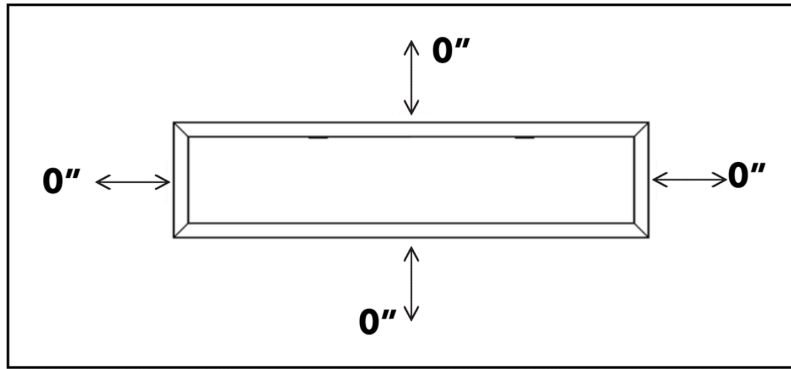


Front View

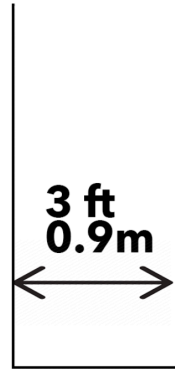

Side View

Minimum Clearances to Combustibles	
Top	0"
Sides	0"
Back	0"
Bottom	0"
Front	36" / 0.9m

FRAMING

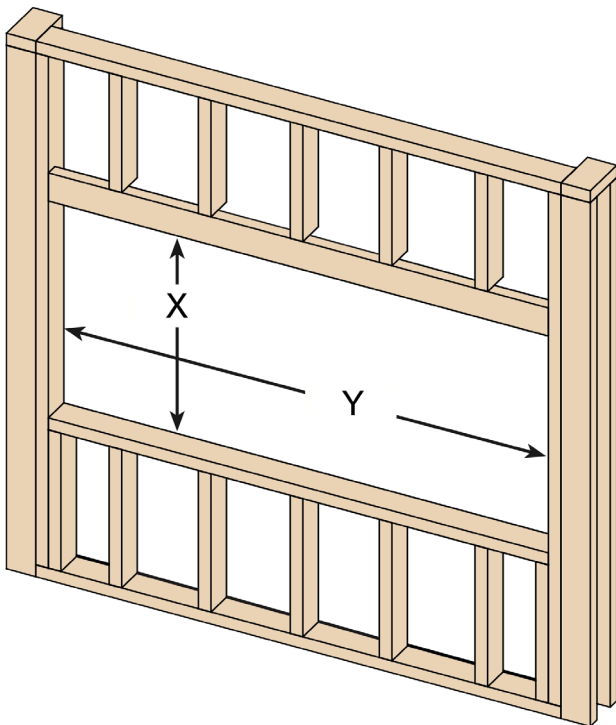

FRAMING DIMENSION		
X	Y	DEPTH
489 mm	1245 mm	152 mm
19 1/4 in.	49 in.	6 in.

* Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



Dynasty Fireplaces
 +1 877-521-1009
 support@dynastyfireplaces.com | dynastyfireplaces.com

