

# HBC5

## Selectable Low Bay / High Bay

### Product Description

The HBC5 LED Circular Low-Bay/High-Bay is a leading high-performance lighting solution with Selectable wattage, Selectable color temperature, and wireless control technology. With a sleek and compact form, it offers improved energy efficiency with low-voltage accessory features. The die-cast aluminum housing with integrated heatsink is designed with multiple mounting points for added options and accessories. The HBC5 produces an impressive light output exceeding 130 lumens per watt and excellent color rendering for true clarity. The impact-resistant polycarbonate lens provides consistent light dispersion, while optional reflectors help reduce glare and provide specific light distribution. The HBC5 operates at 120-277V with 0-10V dimming and a 12V accessory wire for Bluetooth control via the NICOR NLC app. Add a 40W emergency backup for added safety and security. The HBC5 is the ideal fixture for warehouses, retail stores, gymnasiums, and other large indoor spaces.

#### Construction

- Ultra-slim construction with off-board driver for improved thermal management
- Vented aluminum heatsink provides superior cooling while reducing fixture weight
- Polyester powder coat

#### Optical System

- High efficiency LEDs with 90° polycarbonate optic
- 90° polycarbonate reflector available
- Polycarbonate glare shields available
- 90° aluminum reflector available
- Selectable CCT of 3500K/4000K/5000K
- Standard 80 CRI to improve safety and color definition in public places

#### Electrical

- Input voltage of 120-277VAC
- Selectable wattage of 100/120/150W or 200/220/240W
- Power factor: >0.9, THD < 20%
- Luminaire surge protection level: designed to withstand up to 6kV ring wave and 6kV/3kA combination wave per ANSI C82.77-5-2017 requirements for high bay luminaires.
- 6ft power cord and 3ft control (0-10 dimming & 12VDC output) cord standard
- Operating temperature range: -40° to 122°F (-40° to 50°C), -22° to 122°F (-30° to 50°C) with sensor installed.

#### Controls

- Sensor socket pre-installed on every fixture
- Field installable multifunction MW or PIR sensor available
- Standard full-range dimming with compatible 0-10VDC dimmers
- 12VDC output provides power to off-board sensors

#### NLC (Network Lighting Controls)

- Bluetooth Low Energy (BLE) mesh network providing Luminaire Level Lighting Control
- Field installable BLE PIR/Daylight sensor available. Requires HBCSOCKETADAPT1.
- Configurable with the NICOR NLC app available on iOS and Android devices
- Provides full dimming control, scheduling, LLLC with occupancy and daylight harvesting functions

#### Mounting and Installation

- Includes hook with locking bolt (M10 thread) for simple, secure mounting
- 3/4" NPT pendant adapter available
- Yoke accessory available
- Wire guard at lens location available
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the fixture or electrical distribution panel

#### Listings

- cULus 1598 Listed for wet locations
- DLC 5.1 Premium listed
- IP65 rated
- RoHS compliant
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- TM-21 Reported L70(9k) life >54,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards

#### Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Project

Catalog

Type

Date



**HBC5**  
**100W/120W/150W**  
**200W/220W/240W**  
**3500K/4000K/5000K**  
**LED Low Bay/High Bay**



# HBC5

## Selectable Low Bay / High Bay

### Ordering Information

Example: HBC5150SUS8BK

Series	Version	Wattage	Voltage	CCT's	CRI	Finish
HBC	5	150S (100/120/150W)	U (120-277VAC)	S (3500K/4000K/5000K)	8 (80+)	BK (Black)
		240S (200/220/240W)				WH (White)

Specifications and dimensions subject to change without notice.

### Optic Accessories

accessories sold separately

90° Aluminum Reflector (150W)	HBC5150RFLAL
90° Aluminum Reflector (240W)	HBC4240RFLAL
90° Polycarbonate Reflector (150W)	HBC5150RFLPC
90° Polycarbonate Reflector (240W)	HBC4240RFLPC
Glare Shield for PC Reflector (150W)	HBC5150GSPC
Glare Shield for PC Reflector (240W)	HBC4240GSPC
Wire Guard for Fixture (150W)	HBC5150WG
Wire Guard for Fixture (240W)	HBC4240WG

Note: HBC4240 reflector accessories fit the HBC5240



### Mounting Accessories

3/4" NPT Pendant Adapter (HBC5150 & 240W)	HBC4100-240PEND
3/4" NPT Pendant Adapter, White (HBC5150 & 240W)	HBC4100-240PENDWH
Yoke Mount (HBC5150)	HBC4100-200YOKE
Yoke Mount - White (HBC5150)	HBC4100-200YOKEWH
Yoke Mount (HBC5240)	HBC4240YOKE
Yoke Mount - White (HBC5240)	HBC4240YOKEWH

### Motion Sensor Accessories (see specsheet for full information)

PIR Motion Sensor (all models)	HBC4SENSORPIR
Microwave Motion Sensor (all models)	HBC4SEMSORMW
Remote Control for Sensors	HBC4REMOTE
HBC Daylight/OCC Sensor v2	HBC-MWOSR2
MWOS360R2 Handheld Remote	MWOS360R2-REMOTE
NLC Wireless PIR/Daylight Sensor w/Lens (Requires HBCSOCKETADAPT1)	NLCSPEJ1WH-LHW
3.5mm Adaptor for HBC 4-pin Socket	HBCSOCKETADAPT1

### Emergency Accessories (see specsheet for full information)

40W Emergency Pack (120-277V)	EMB4002UNVBK
40W Emergency Remote Control	EMB4002REMOTE

Note: HBC4100-200 mounting accessories fit the HBC5150  
HBC4240 mounting accessories fit the HBC5240



# HBC5

Selectable Low Bay / High Bay

## Performance Data

Model Number	Normal Operation			40W EM	
	CCT	Lumens	Watts	Lumens/Watt	Lumens
HBC5150SUS8	3500	13396	100	134	5358
	4000	14472		145	5789
	5000	13561		136	5424
	3500	16075	120	134	5358
	4000	17366		145	5789
	5000	16274		136	5424
	3500	20094	150	134	5358
	4000	21708		145	5789
	5000	20342		136	5424
HBC5240SUS8	3500	27183	200	136	5437
	4000	29140		146	5828
	5000	27545		138	5509
	3500	29901	220	136	5437
	4000	32054		146	5828
	5000	30300		138	5509
	3500	32619	240	136	5437
	4000	34968		146	5828
	5000	33054		138	5509

Fixture tested per LM-79-08. Photometric data is of the performance of a representative fixture. Results may vary in the field.

Lumens v. Ambient Temperature		
Ambient °C	Ambient °F	Lumen Multiplier
-40	-40	1.15
-35	-31	1.12
-30	-22	1.10
-25	-13	1.0
-20	-4	1.05
-15	5	1.04
-10	14	1.04
-5	23	1.03
0	32	1.03
5	41	1.03
10	50	1.02
15	59	1.01
20	68	1.00
25	77	1.00
30	86	0.98
35	95	0.96
40	104	0.94
45	113	0.92
50	122	0.90

Ambient Temperature Ratings			
Model Number	Normal	Sensor	EM
HBC5150	-40°- 122°F (-40°- 50°C)	-22°-122°F (-30°- 50°C)	14°-122°F (-10°- 50°C)
HBC5240			


# HBC5

Selectable Low Bay / High Bay

## Photometric Data

### HBC5 150W 5000K

Input Voltage (VAC)	120-277
System Level Power (W)	150.1
Delivered Lumens (Lm)	20342
System Efficacy (Lm/W)	135.5
Correlated Color Temp (K)	5131
Color Rendering Index (CRI)	82
Beam Angle	90.8
Spacing Criteria	1.37

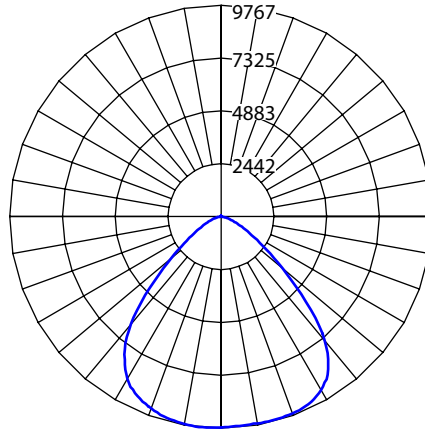

### Cone of Light Tabulation


Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
15	43.3	30.3
17	33.7	34.4
20	24.3	40.4
23	18.4	46.5
25	15.5	50.5
28	12.4	56.6
30	10.8	60.6

### Data Multiplier

	3500K	4000K	5000K
100W	0.659	0.711	0.667
120W	0.790	0.854	0.800
150W	0.988	1.067	1.000

### HBC5 240W 5000K

Input Voltage (VAC)	120-277
System Level Power (W)	243.6
Delivered Lumens (Lm)	33540
System Efficacy (Lm/W)	137.7
Correlated Color Temp (K)	5092
Color Rendering Index (CRI)	82
Beam Angle	90.8
Spacing Criteria	1.30

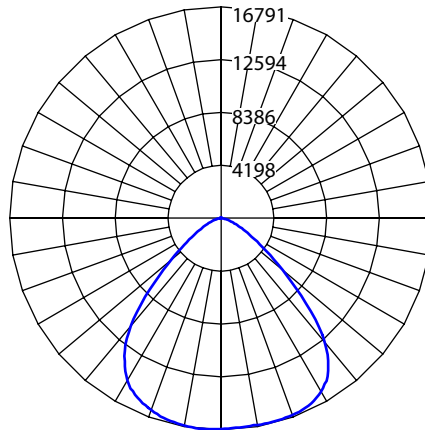

### Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
15	74.2	30.3
17	57.8	34.4
20	41.8	40.4
23	31.6	46.5
25	26.8	50.5
28	21.3	56.6
30	18.6	60.6

### Data Multiplier

	3500K	4000K	5000K
200W	0.754	0.808	0.764
220W	0.905	0.970	0.917
240W	0.987	1.058	1.000

Fixture tested per LM-79-08. Photometric data is of the performance of a representative fixture. Results may vary in the field.

## Dimmers and Sensors

### Recommended Dimmers\*

Lutron NTSTV  
Lutron DVSTV  
Cooper SF10P  
Legrand RH4FBL3PW

### 12VDC Output

Included 12VDC output can be used to provide power to low voltage sensor or controls. Do not use the 12VDC output if a sensor is installed.

## EMB400 Details



The NICOR EMB400 is an LED emergency driver for field installations. It enables normal and emergency operation of an LED fixture up to 300W (120-277V) that utilize 0-10V dimming or 40W non-dimming. During a power failure, the unit activates emergency mode to maintain constant output power to the fixture for a minimum of 90 minutes without light degradation. The unit contains a lithium battery, charger, and converter circuit in a single housing and features a built-in junction box for simple installation. The EMB400 also features automatic monthly and annual self-testing features with unit status communicated via the illuminated test button.



Optional remote test  
controller

# HBC5


## Selectable Low Bay / High Bay

### HBC4SENSORPIR

#### Passive Infrared (PIR) Motion Sensor

See the individual spec sheet for further information

- Field installed 12VDC sensor
- Microwave motion detector with built in daylight sensor
- Remote control programmable
- Highly configurable:
  - Detection area
  - Hold time
  - Dimming level
  - Stand-by period
  - Stand-by dimming
  - Daylight harvesting threshold
- Max mounting height: 20ft (6m)
- IP65 Rated

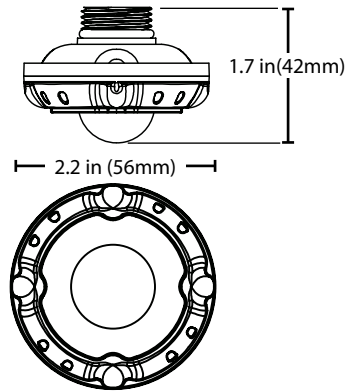


### HBC4SENSORMW

#### Microwave Motion Sensor

See the individual spec sheet for further information

- Field installed 12VDC sensor
- Microwave motion detector with built in daylight sensor
- Remote control programmable
- Highly configurable:
  - Detection area
  - Hold time
  - Dimming level
  - Stand-by period
  - Stand-by dimming
  - Daylight harvesting threshold
- Max mounting height: 50ft (15m)
- IP65 Rated

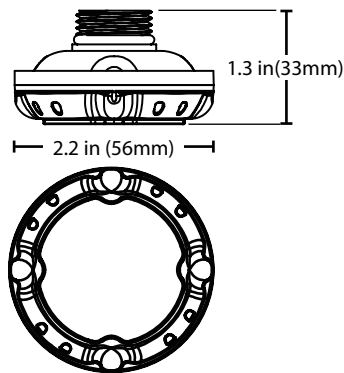

### HBC4REMOTE

#### Remote Control for Sensors

See the individual spec sheet for further information

- Allows programming of MW or PIR sensors
- Allows adjustment of:
  - Brightness
  - Hold time
  - Stand-by dim level
  - Stand-by time
  - Sensor sensitivity
  - Daylight harvesting threshold



### NLC SPEJ1WH-LHW WITH HBC SOCKET ADAPT1

#### NLC Bluetooth PIR/Daylight Sensor & Adapter

See the individual spec sheet for further information


- Field installed 12VDC sensor
- Infrared motion detector with built in daylight sensor
- Commissioned with NLC App
- Highly configurable:
  - Occupancy/Vacancy Detection
  - Full Range Dimming (0-10V)
  - Daylight Harvesting
  - Scene Control
  - High-End Trim
  - Full Networking
- Max mounting height: 40ft (12m)
- IP65 Rated



# HBC5

Selectable Low Bay / High Bay

## Dimensions

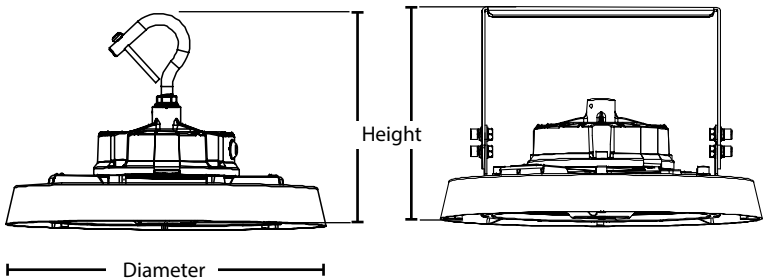

	HBC5150	HBC5240
Height w/ hook	6.7 in. (170mm)	7.5 in. (190 mm)
Height w/ yoke	7.2 in. (183mm)	8.1 in. (206mm)
Height w/ hook & sensor	7.6 in. (192mm)	8.3 in. (210mm)
Height w/ yoke & sensor	8.9 in. (226mm)	8.9 in. (226mm)
Fixture Diameter	11.0 in. (280mm)	13.4 in. (340mm)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

