

60 Inch Ceiling Fan LED

(Brushed Nickel)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____


Product Information

Finish	Brushed Nickel
Blade Finish	Brushed Nickel

Specifications

Number of Blades	3
Blades Included	Yes
Blade Pitch	25 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	Optional Downrod Kit
Primary Control System	3 Speed Wall Control Full Function
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	Yes, Low Ceiling Adaptable
Lead Wire Length	78.00"
Motor Size	188 MM X 20 MM
Motor Type	AC

Dimensions

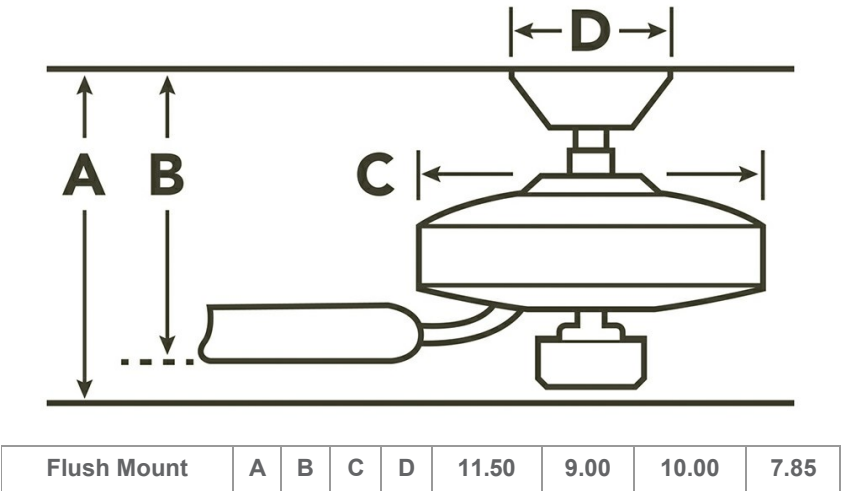

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
# of Bulbs/LED Modules	1
Watts	64/26
Initial Lumens	2300
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Kelvin Temperature	3000K
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Wet
--------------	-----

Installation

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

60 Inch Ceiling Fan LED

(Brushed Nickel)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Walnut	ETCHED CASED OPAL	WALNUT
Brushed Nickel	ETCHED CASED OPAL	BRUSHED NICKEL
Satin Black	ETCHED CASED OPAL	SATIN BLACK
White	ETCHED CASED OPAL	WHITE

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.