

USER MANUAL



LARGE BEAN BAG WITH OTTOMAN


INTRODUCTION

Thank you very much for choosing our product. Please read the instruction carefully before assembly and keep it for future reference. If you need further assistance on assembly, please contact our customer service through email.

TIPS

1. When installing the product, use a soft underlay (such as carpet or cardboard) to avoid scratching or damaging the surface of the product.
2. The product is unstable during installation. Please do not use it before the installation is completed.
3. The product is in compression package. Just take out and plump up for hours. 48 to 72 hours is better for reaching its full size.

**PLEASE ALLOW 48 TO 72 HOURS
FOR THE SOFA TO FULLY EXPAND.**

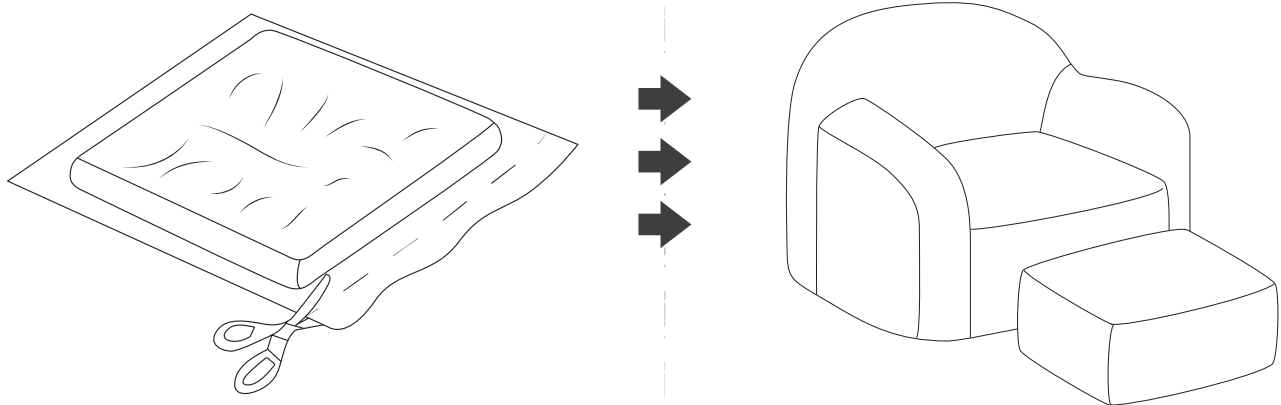

CARE INSTRUCTIONS


- Take your slipcover outside and shake off any loose dirt.
- slipcover are best washed with a steam cleaner.
- Hand washing is ok, fill a bath or wash tub with 4 parts cold water and 1 part delicate laundry liquid.
- Do not use a fabric softener.
- The detergent should be non-bio scent-free and bleach-free.
- Long soak is not recommended.
- Squeeze out the suds and rinse thoroughly in cold water.
- Squeeze and soak up any excess water and lay the cover out to air dry in a shaded place.
- Direct sunlight will cause the color of your cover to fade.



NOTE: If you need to wash the slipcover, we recommend hand washing and following these steps.

DISASSEMBLY INSTRUCTIONS:

1. Open the outer zipper and remove the backrest foam ①.
2. Remove the armrest foam ③.
3. Open the Velcro straps, remove the seat foam ②, and then reattach the Velcro straps to prevent them from sticking to the fabric cover during washing.
4. Open the zipper and remove the foot pedal foam ④.


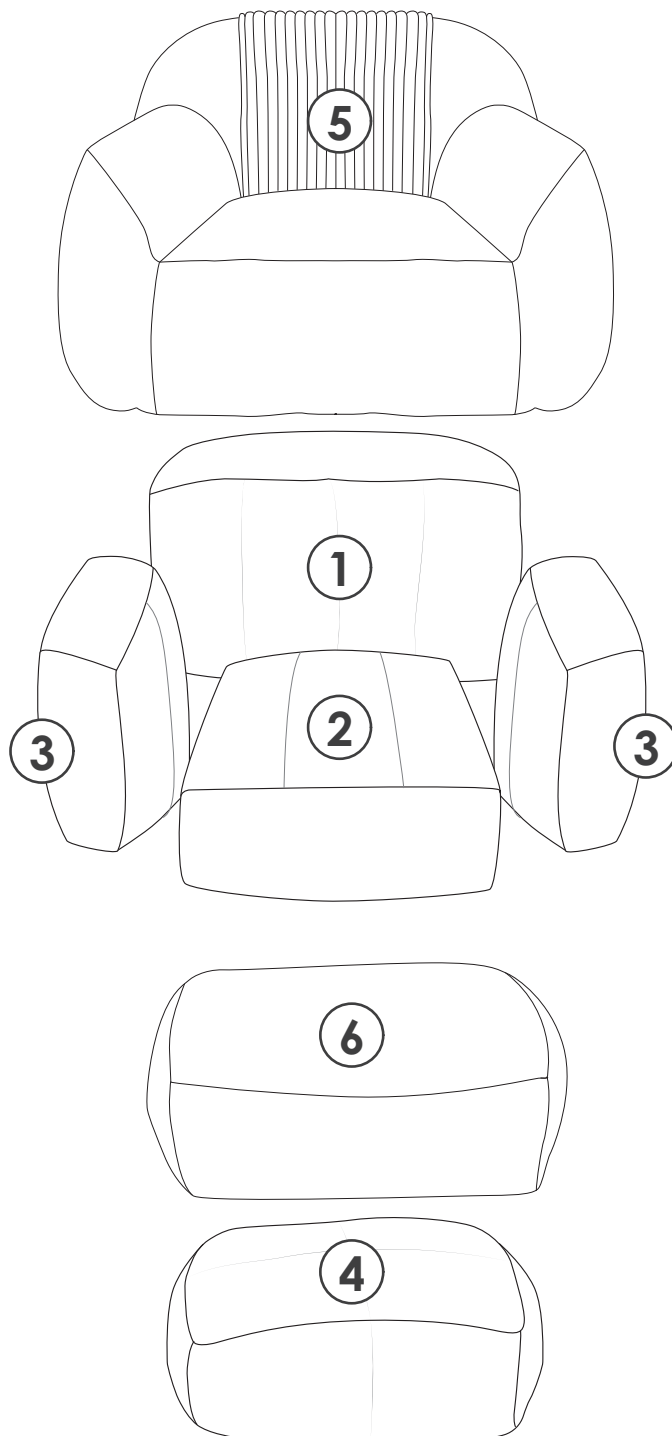


REASSEMBLY GUIDE

If you remove the cover, you can reinstall it by following these steps. We recommend having two people for the installation.


01

Open the Velcro straps, insert the Seat Foam **2** into the Slip-cover **5**, and adjust the foam if necessary.

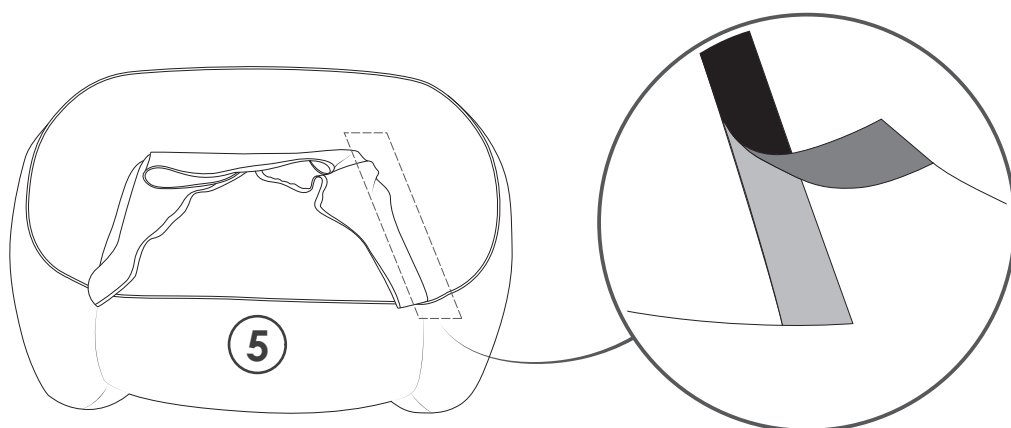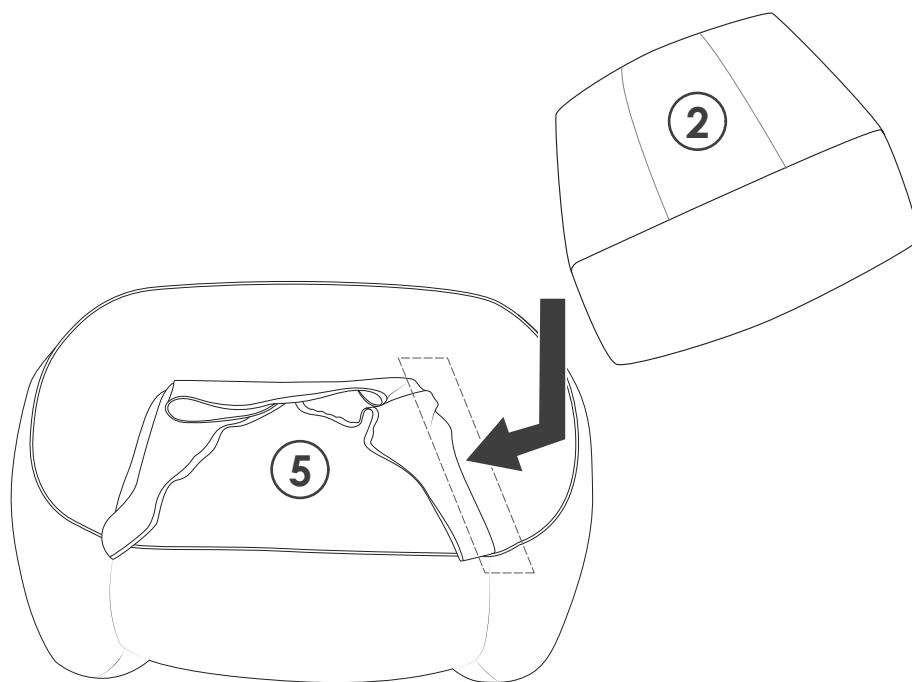


02

Insert Backrest Foam **1** into the back of Slipcover **5** adjusting the foam as needed.

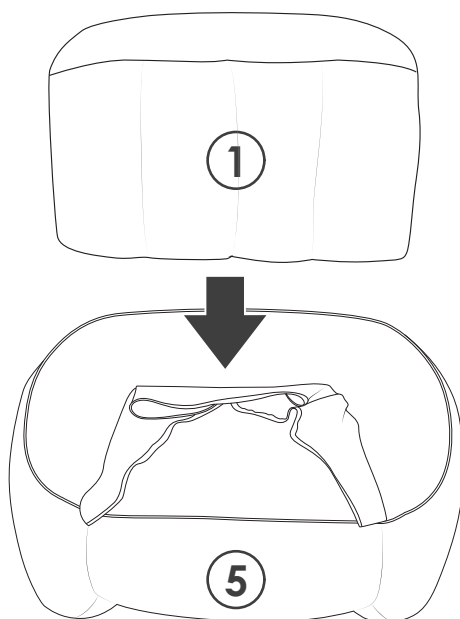

03


Insert both Armrest Foam **3** pieces into the sides of Slipcover **5**.

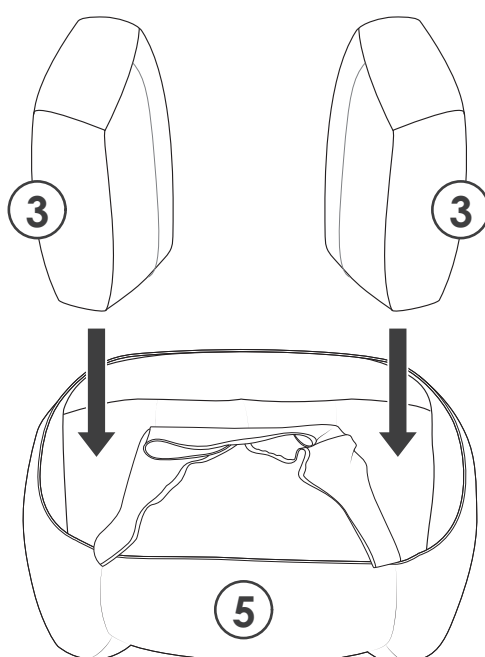

04


Zip the Slipcover closed to secure the foam pieces in place.

Note: This requires two people to operate, compressing and tightening the zipper simultaneously.

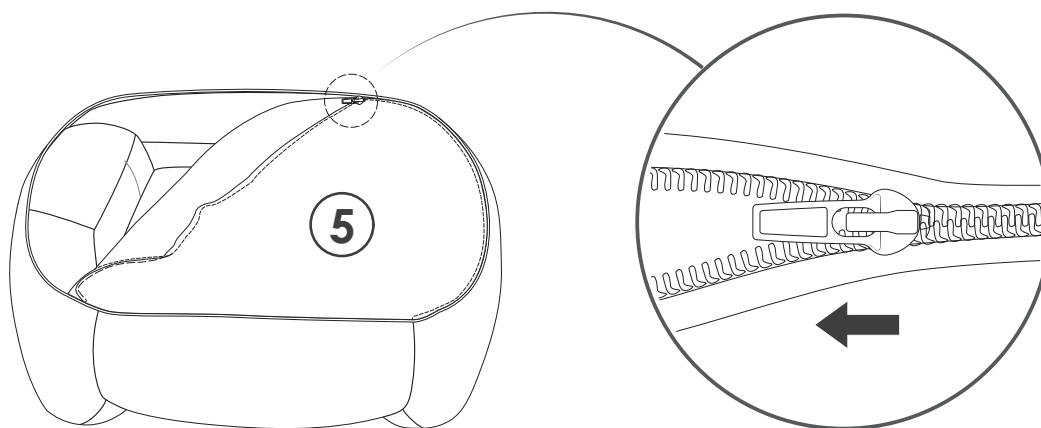

05


Insert the Foot Pedal Foam **4** into the Slipcover **6**, and adjust the foam if necessary.

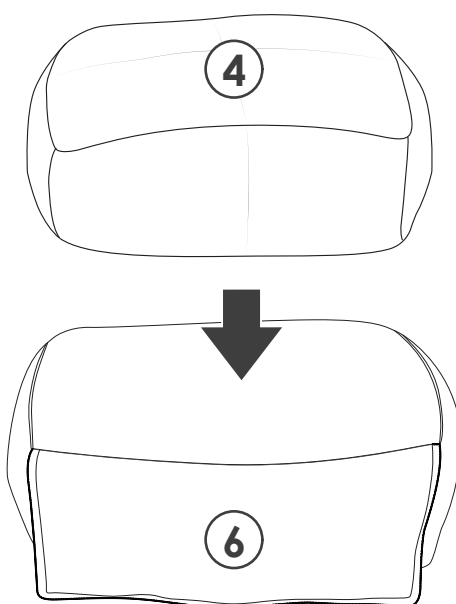


06

Zip the Slipcover closed to secure the foam pieces in place.

Note: This requires two people to operate, compressing and tightening the zipper simultaneously.

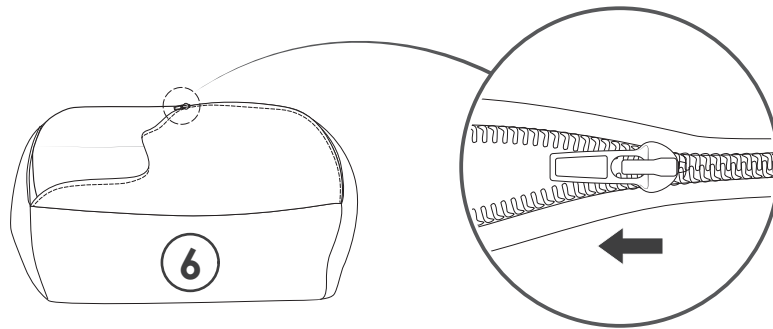

07

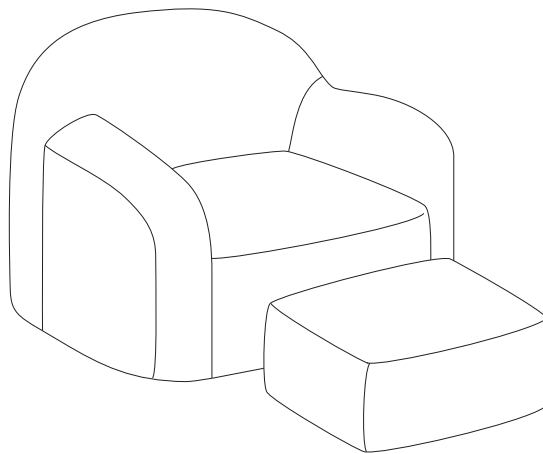

WARRANTY

We provide an **12-month** warranty on the product starting from the date of the original purchase. If the product has any manufacturing defect, please contact us through email with details about the problem. We will send you further information about the return or exchange.