

Pendant

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

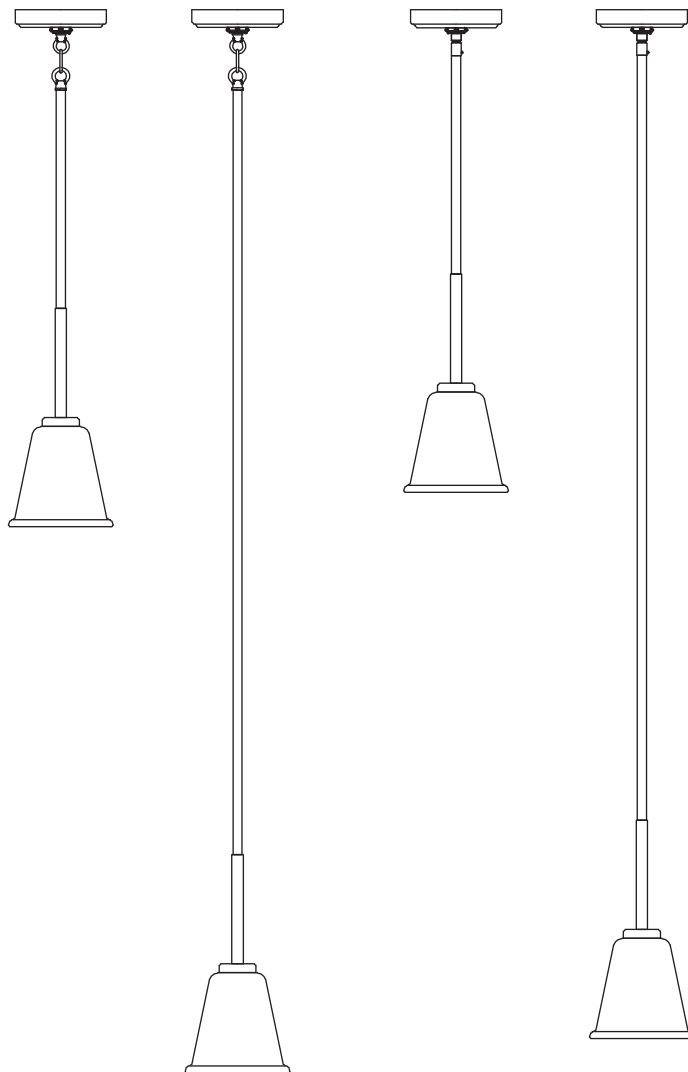

SAVE THESE INSTRUCTIONS!

Install the Fixture

1A

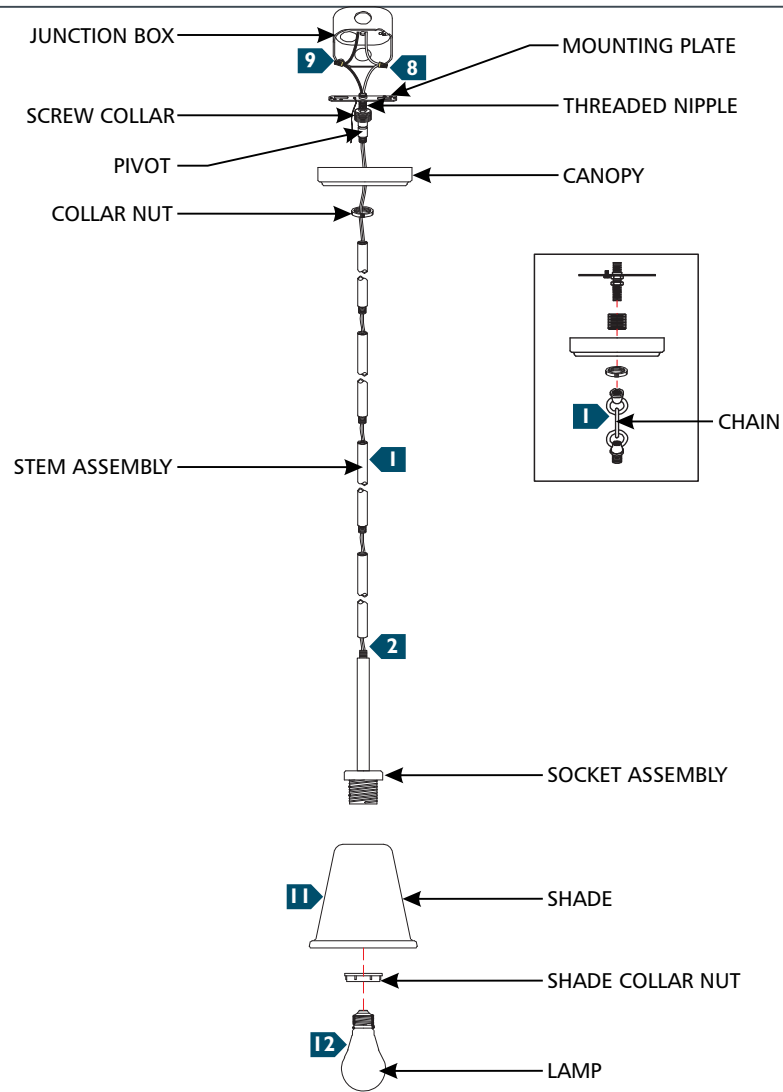

- 1** Determine the wanted height or look of the fixture with the provided pivot, chain, and stems, then assemble them by screwing them together. All part may be used alone or used in combination.
- 2** Feed the fixture wires through the stem/chain assembly, then screw the stem assembly onto the socket assembly.
- 3** If necessary, screw the threaded nipple tightly onto the mounting plate.
- 4** Install the collar nut and canopy onto the stem assembly.
- 5** Feed the fixture wires through the mounting plate/nipple assembly and screw the screw collar onto the threaded nipple.
- 6** Align and secure the mounting plate to the junction box.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 11** Place the shade over the socket and secure it in place by screwing the shade collar nut onto the socket. Repeat for remaining shades.
- 12** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.