


2' Chair

Assembly Instructions

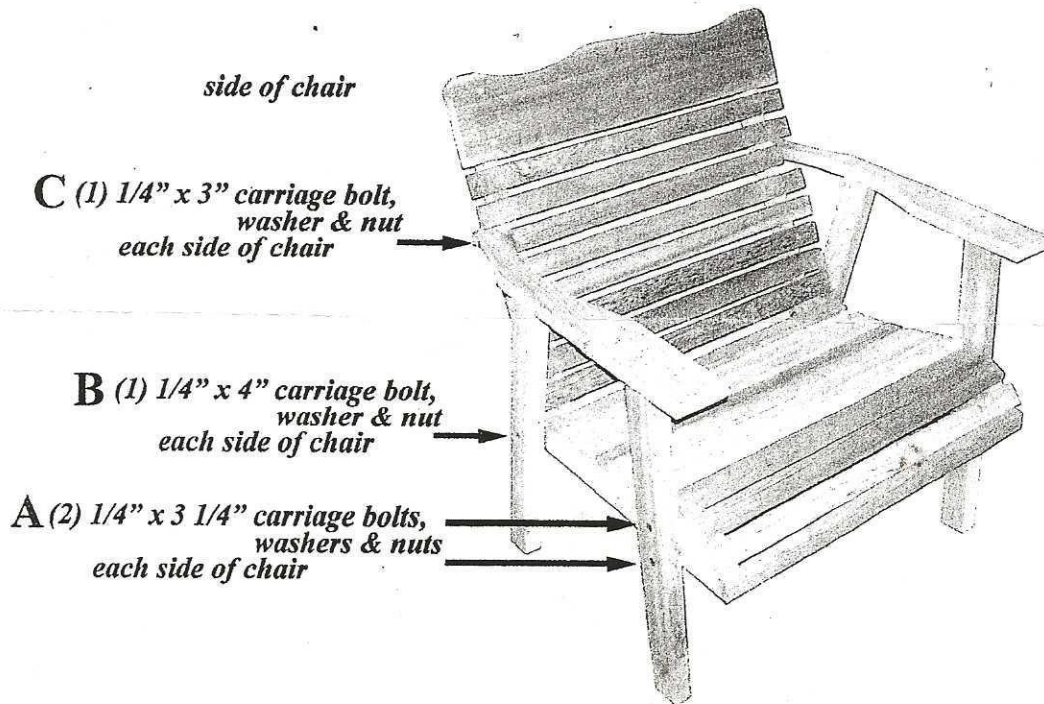

I. Chair leg and seat assembly

Hardware needed: (2) 1/4" x 4" carriage bolts
(2) 1/4" x 3" carriage bolts (8) 1/4" regular nuts
(8) 1/4" washers (4) 1/4" x 3 1/4" carriage bolts

Tools recommended:

Small hammer and a 7/16" open end wrench

1. Select proper armrest for each end (armrest curve toward seat, straight edge to outside)

Attach the arms to the chair

Follow the bolt specifications in the diagram, starting with **A**, which shows which bolts go for each specific spot. Use 1/4" washers and 1/4" nuts. Repeat with **B** & **C**.