



USER'S MANUAL

THIS INSTRUCTION BOOKLET CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

Please give us a chance to make it right and do better !

Contact our friendly customer service department for help first.

Replacements for missing or damaged parts will be shipped **ASAP!**

Contact Us!

Do NOT return this item.

Contact our friendly customer service department for help first.

Before You Start

- ⦿ Please read all instructions carefully.
- ⦿ Retain instructions for future reference.
- ⦿ Separate and count all parts and hardware.
- ⦿ Read through each step carefully and follow the proper order.
- ⦿ We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
- ⦿ Always place the product on a flat, steady and stable surface.
- ⦿ Keep all small parts and packaging materials for this product away from babies and children as they potentially pose a serious choking hazard.

Caution : Read all of this leaflet carefully before using your telescopic ladder

Before use:

1. Ensure that you are fit enough to use the ladder. Certain medical conditions or medication, alcohol or drug abuse could make ladder use unsafe.
2. When transporting ladders on roof bars or in a truck, ensure they are suitably placed to prevent damage.
3. Inspect the ladder after delivery and before first use to confirm condition and operation of all parts.
4. Visually check the ladder is not damaged and is safe to use at the start of each working day when the ladder is to be used.
5. For professional users, regular periodic inspection is required.
6. Ensure the ladder is suitable for the task.
7. Do not use a damaged ladder.
8. Remove any contamination from the ladder such as wet paint, mud, oil or snow.
9. Before using a ladder at work a risk assessment should be carried out respecting the legislation in the country of use.

Positioning and erecting the ladder

1. Inclination angle should not exceed 75 degree.
2. Ladder shall be on an even level and unmovable base.
3. Leaning ladders should lean against a flat non-fragile surface and should be secured before use, e.g. tied or use of suitable stability device.
4. When positioning the ladder take into account risk of collision with the ladder e.g. from pedestrians, vehicles or doors (no fire exits) and windows where possible in the work area.
5. Identify any electrical risks in the work area such as overhead lines or other exposed electrical equipment.
6. Ladder shall be stood on its feet, not the rungs or steps.
7. Ladders shall not be positioned on slippery surface (such as ice, shiny surface or significantly contaminated solid surface) unless additional effective measures are taken to prevent the ladder slipping or ensuring contaminated surfaces are sufficiently clean.

Attention

1. Do not exceed the maximum total load
2. Do not overreach. Users should keep their buckle (navel) inside the stiles and both feet on the same step/rung throughout the task.
3. Do not step off a leaning ladder at a higher level without additional security, such as tying off or use of a suitable stability device.
4. Do not use standing ladder of access to another level.
5. Do not stand on the top three steps/rungs of a leaning ladder.

6. Ladders should only be used for light work of short duration.
7. Do not use the ladder outside in adverse weather conditions, such as strong wind.
8. Take precautions against children playing on the ladder.
9. Face the ladder when ascending and descending.
10. Keep a secure grip on the ladder when ascending and descending.
11. Do not use the ladder as a bridge.
12. Wear suitable footwear when climbing a ladder.
13. Avoid excessive side loading e.g. drilling brick and concrete.
14. Do not spend long periods on a ladder without regular breaks (tiredness is a risk)
15. Leaning ladders used for access to a higher level should be extended at least 1m above the landing point.
16. Equipment carried while using a ladder should be light and easy to handle.

Open the ladder:

Automatic locking: each rung of your ladder has 2 locking pins are blocked, the automatically inserted into the slots of the uprights in place when the ladder is extended.

The condition of the lock is of the two black buttons the side of each rung is displayed:

Unlocked position: There is a gap between the buttons and the Spar.



Locked position: The buttons are located directly on to leg



Complete extension of the ladder:

Place the ladder on a firm and level ground, move one foot on the lowest rung.

Unfold the top rung and check if the buttons are locked Repeat the process with each of the next lower rung, until the ladders are completely extended.

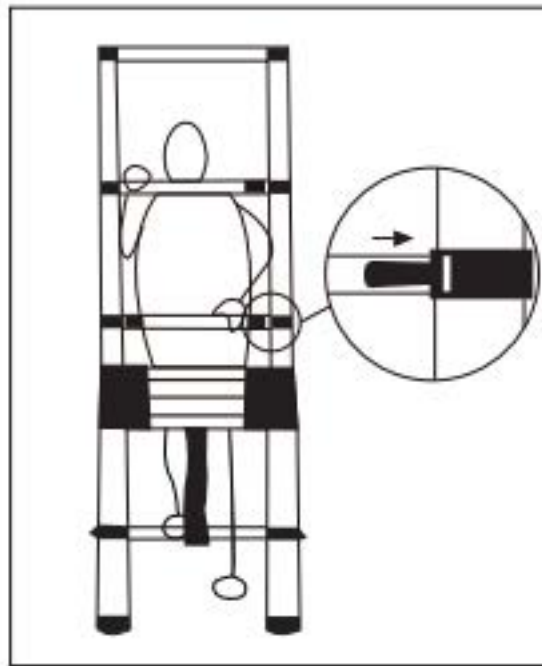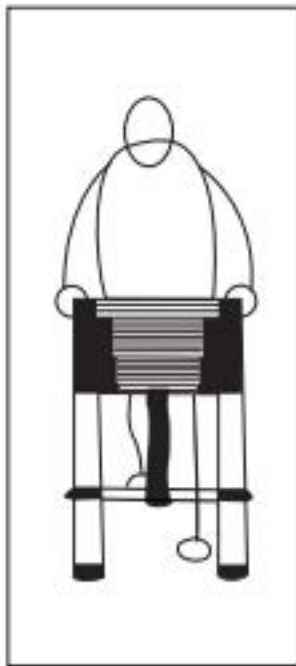


Partial extension of the ladder:

Place the ladder on a firm and level ground, move one foot on the lowest rung.

- Unfold the lowest rung and check if the buttons are locked. Repeat the process with each of the next higher rung, until the arms are completely extended.

Caution: Always check that all buttons are on the exact position “locked”, before you climb on the ladder.

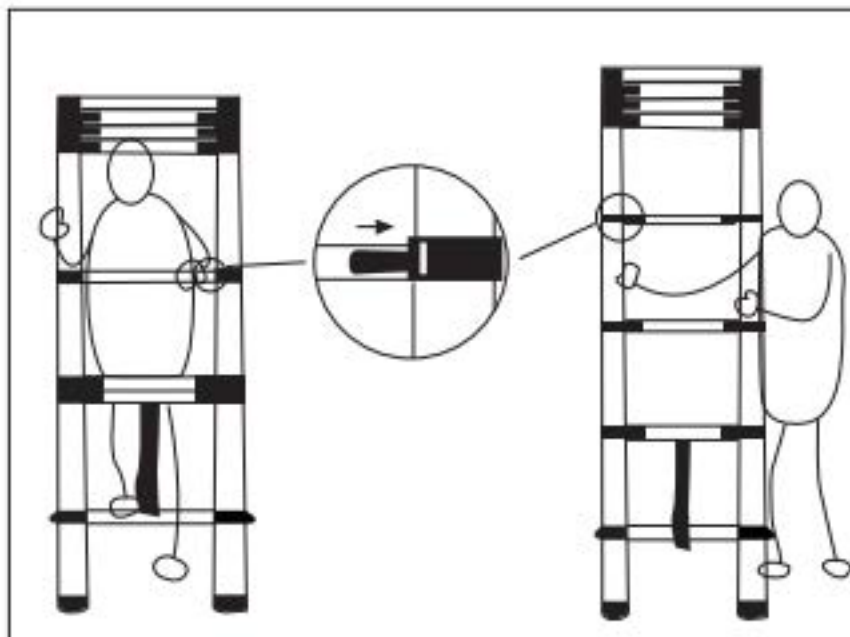

Shorten the Ladder:

- Place the ladder on a firm and level ground make that the lowest rung begin.
- Make sure the both buttons are unlocked.

Welcome to visit our website and purchase our quality products!

Your suggestions and comments for COSTWAY are really important to us!
We sincerely solicit you to go back to our shop and leave a good rating in just a simple click. It would be quite encouraging if you could kindly do so like below:

★★★★★ Great products so far

With your inspiring rating, COSTWAY will be more consistent to offer you
EASY SHOPPING EXPERIENCE, GOOD PRODUCTS and EFFICIENT SERVICE!

- * Reward Points
- * Exclusive Customer Service
- * Personalized Recommendations
- * Permanent Shopping Cart
- * Order History

5 Star Rating



We would like to extend our heartfelt thanks to
all of our customers for taking time to assemble
this product and giving us valuable feedbacks.

