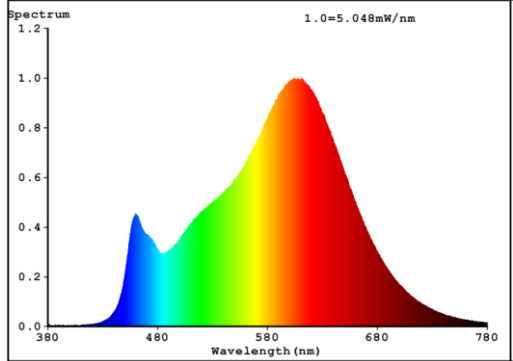


ENERGY CONSERVATION

The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

Product information sheet

Supplier's name or trademark: MiniSun			
Supplier's address: 4 Omega Drive, Irlam, Manchester, M44 5GR			
Model identifier: 18665			
Type of light source: LED G9			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	no
Colour-tuneable light source:	no	Envelope:	no
High luminance light source:	no		
Anti-glare shield:	no	Dimmable:	no
Product parameters			
Parameter	Value	Parameter	Value
General product parameters			
Energy consumption in on-mode (kWh/1,000 h) rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	200Lm In sphere 360°	Correlated colour temperature, rounded to the nearest 100K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set	3000K
On-mode power (P_{on}), expressed in W	2.6	Standby power (P_{sb}), expressed in W and rounded to the second decimal point	-

Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal point	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	52	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	16	
	Depth	16	
			
Claim of equivalent power (see paragraph [2(1) and (2)])	yes	If yes, equivalent power (W)	21
		Chromaticity coordinates (x and y)	0.440 0.403
Parameters for directional light sources:			
Peak luminous intensity (cd)	33.28	Beam angle in degrees, or the range of beam angles that can be set	179.0°
Parameters for LED and OLED light sources:			
R9 colour rendering index value	19	Survival factor	≥0.9
The lumen maintenance factor	≥94.8%		
Parameters for LED and OLED mains light sources:			
Displacement factor (cos ϕ_1)	-	Colour consistency in McAdam ellipses	≤6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage (see paragraph [2(3)]).	-	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0.045	Stroboscopic effect metric (SVM)	0.003