




ASSEMBLY INSTRUCTIONS

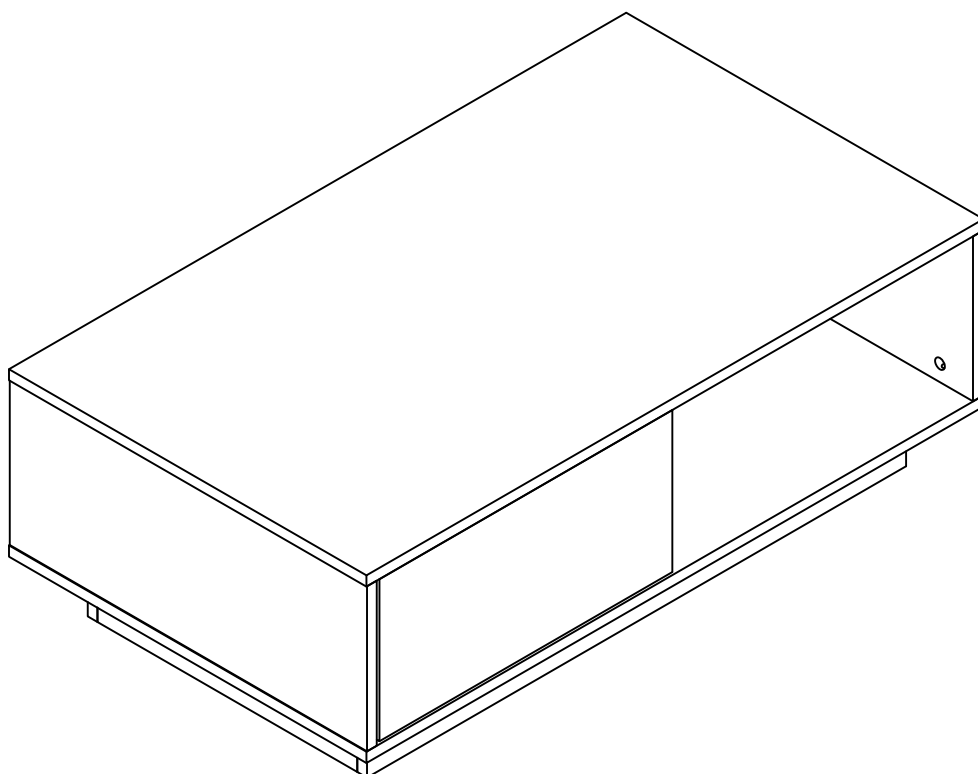


BOARD IDENTIFICATION

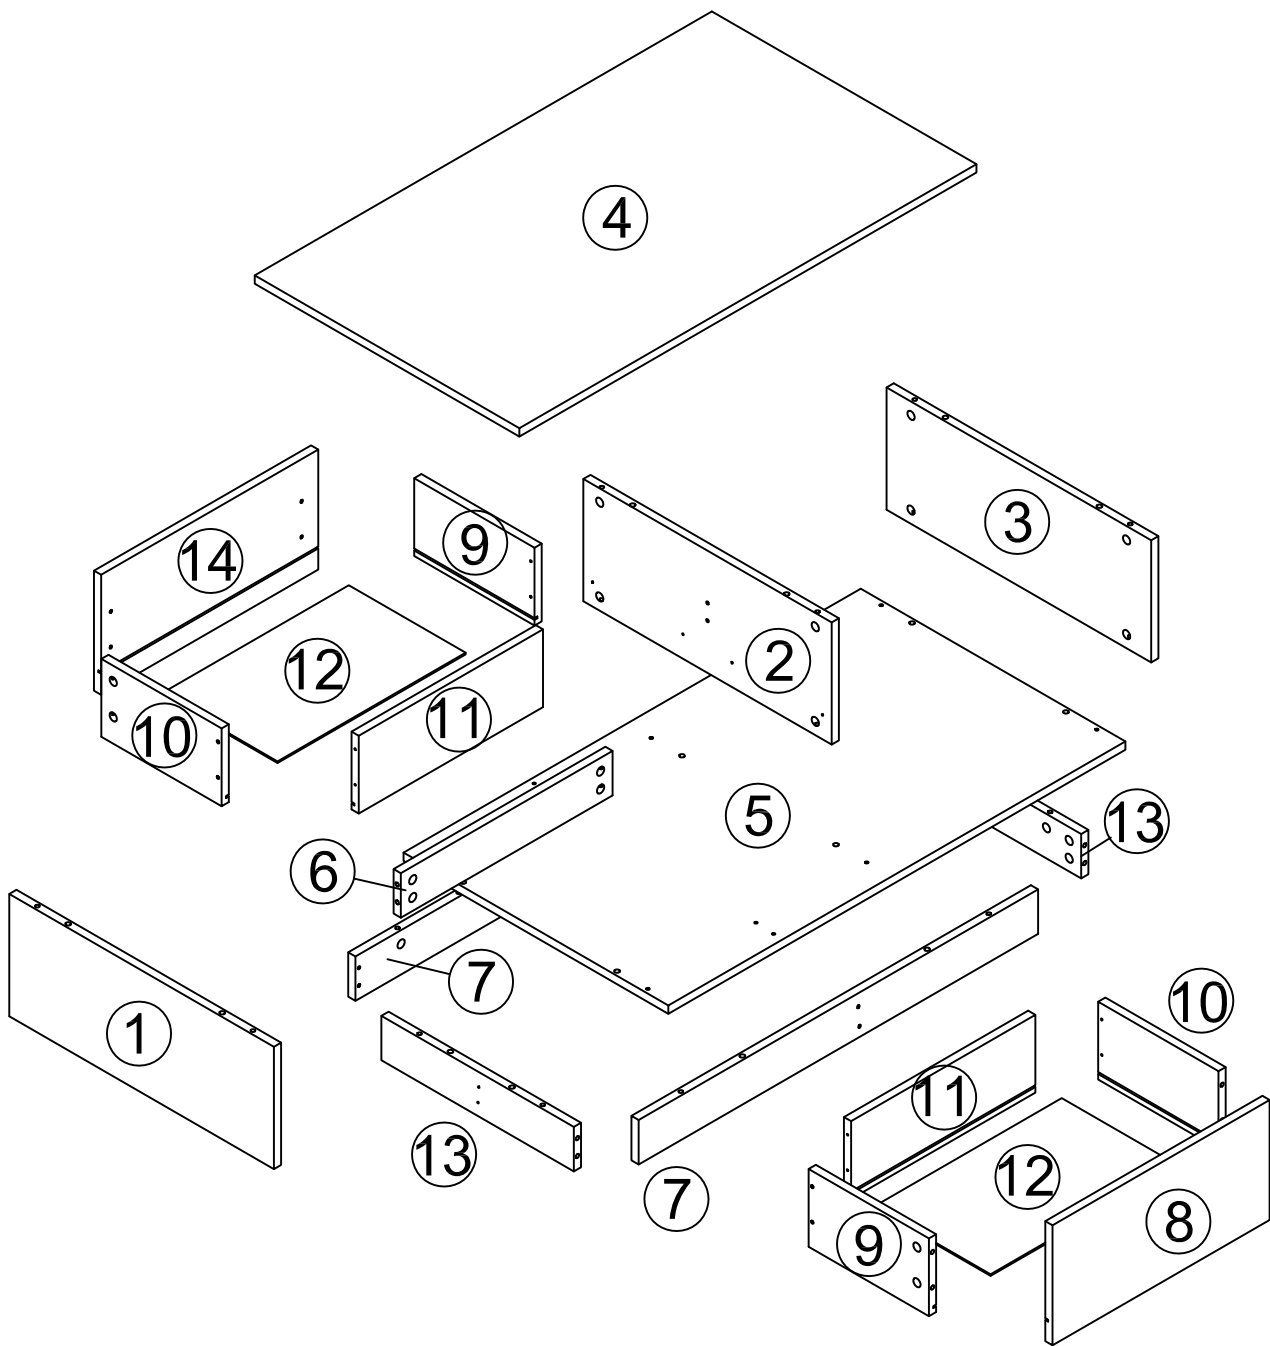


BOARD IDENTIFICATION




①
LEFT SIDE PANEL
X1




②
MIDDLE SIDE PANEL
X1




③
RIGHT SIDE PANEL
X1




④
MAIN PANE
X1




⑤
BOTTOM
X1




⑥
RAIL
X1

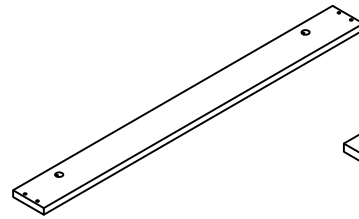


⑦
BASE FRONT&BACK PANEL
X2




⑧
DRAWER FRONT
X1




⑨
DRAWER LEFT
X2




⑩
DRAWER RIGHT
X2




⑪
DRAWER BACK
X2



⑫
DRAWER BOTTOM
X2




⑬
BASE LEFT&RIGHT PANEL
X2




⑭
DRAWER FRONT
X1



1




2




3




CAM LOCK
F15*11




CAM BOLT
F7*31




WOOD DOWEL
F8*30




SCREW
F4*35




SCREW
F3.5*12




LEFT OUTER TRACK
F20*250




RIGHT OUTER TRACK
F20*250




LEFT INNER TRACK
F20*250



RIGHT INNER TRACK
F20*250





BOUNCER

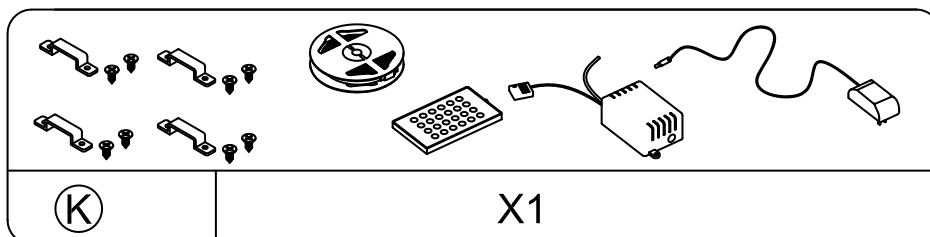

LIGHT STRIP

STEP 1






- Screw cam bolts (B) into panel (4) as below shown.

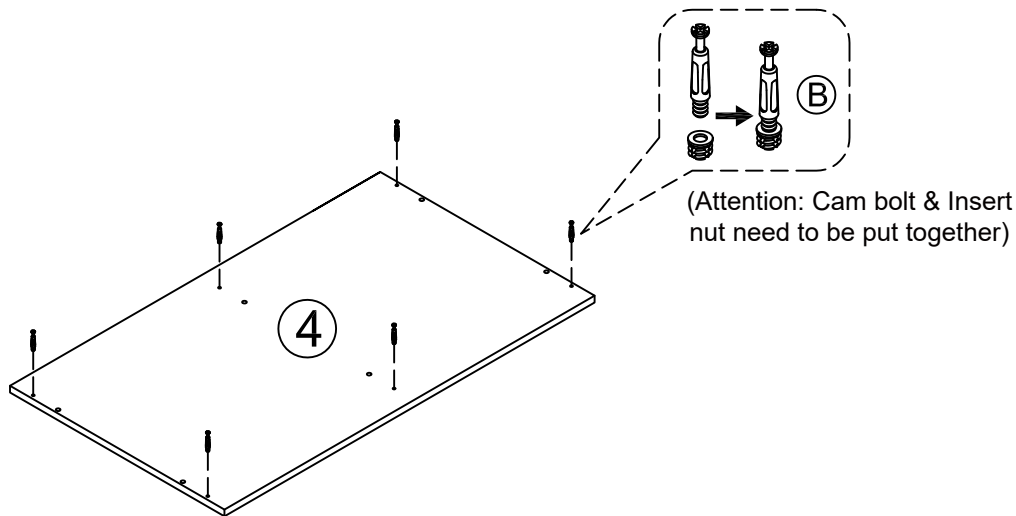

STEP 2


- Screw cam bolts (B) into panel (5) as below shown.

-Lock the rebounder (J) to the panel (5) with the screw (E) as shown in the picture.

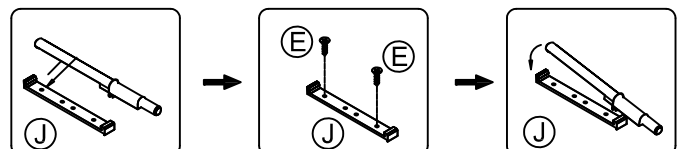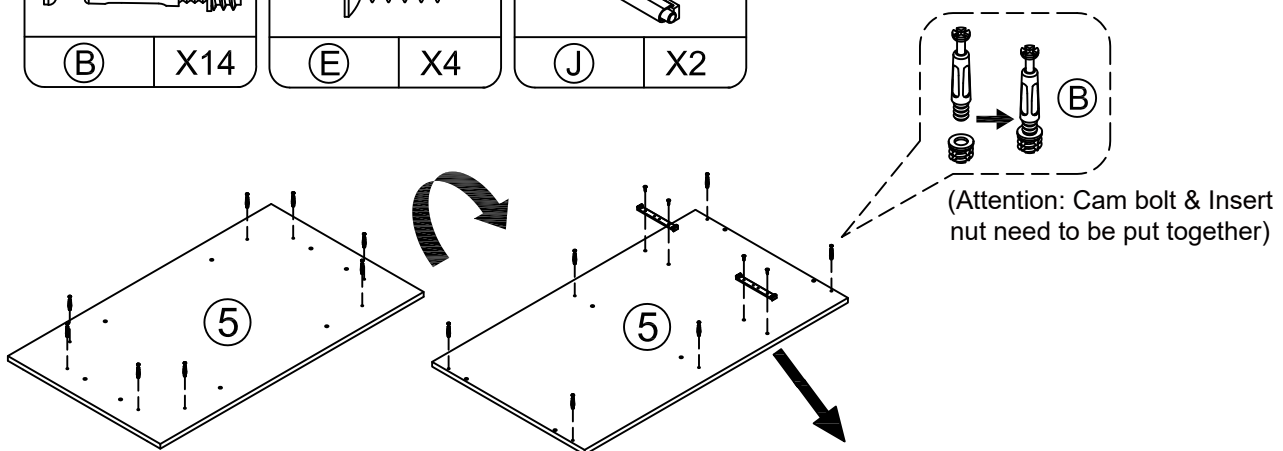


STEP 3

- Screw cam bolts (B) into panel (1) & (2) as below shown.
- Insert wood dowels (C) into panel (1) & (2) & (3) as shown in the picture.

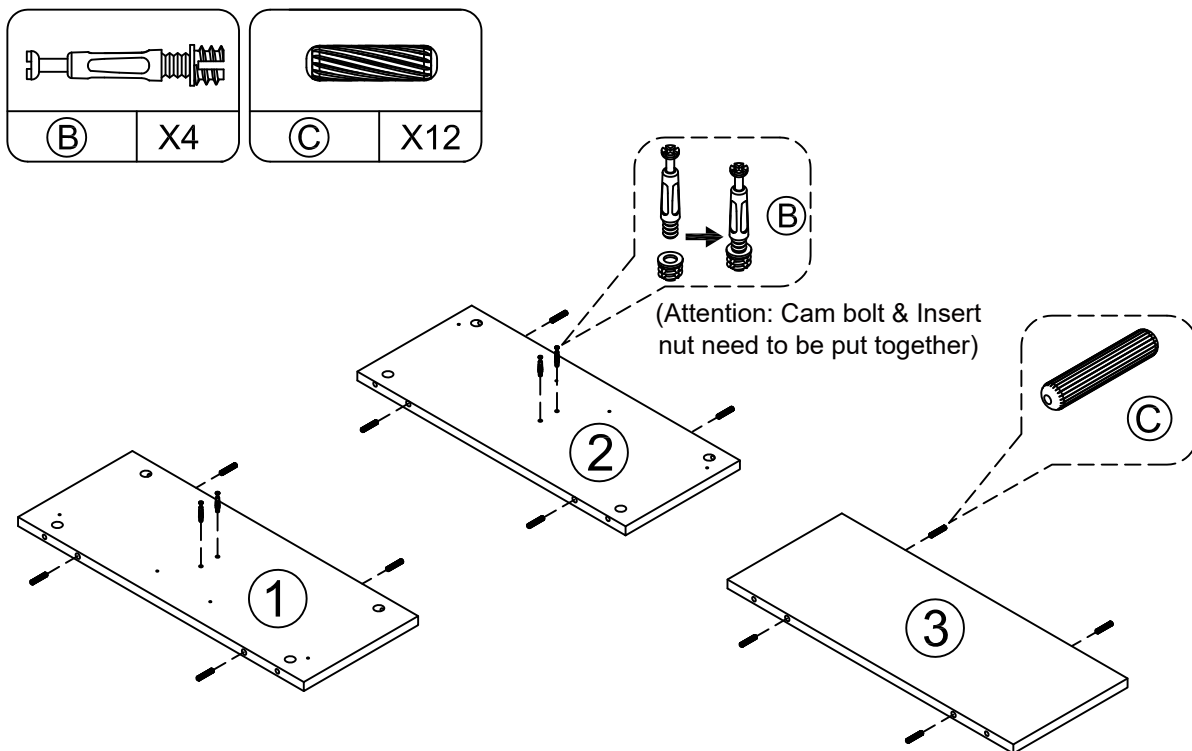



STEP 4

- Screw cam bolts (B) into panel (7) as below shown.
- Insert wood dowels (C) into panel (7) & (13) as shown in the picture.

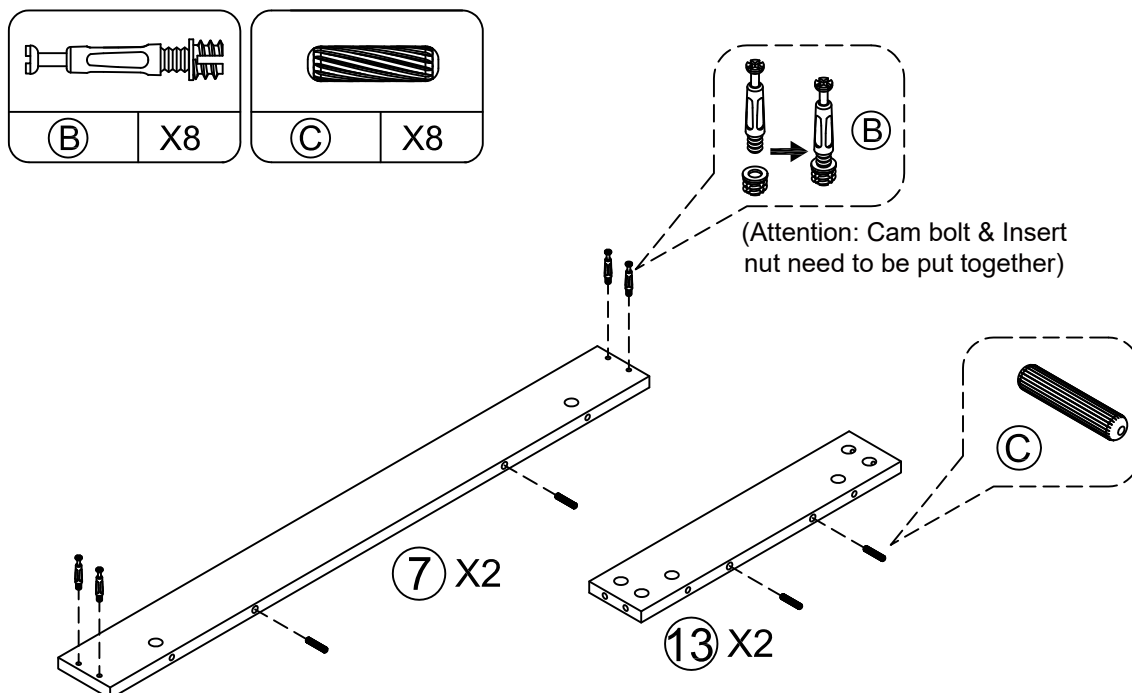



STEP 5

- Attach panel (7) to (13) with cam locks (A).

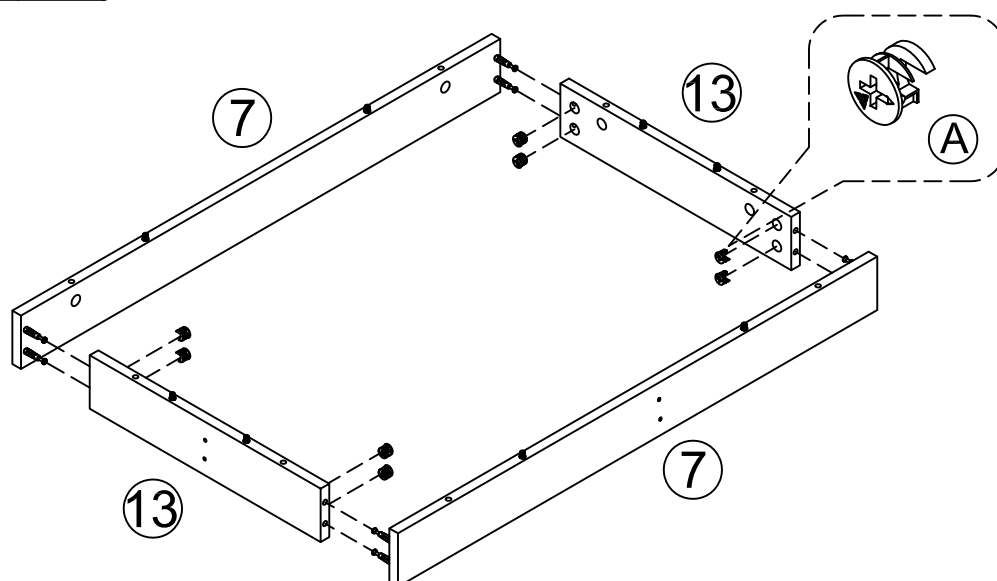



STEP 6

- Attach panel (7) & (13) to (5) with cam locks (A).

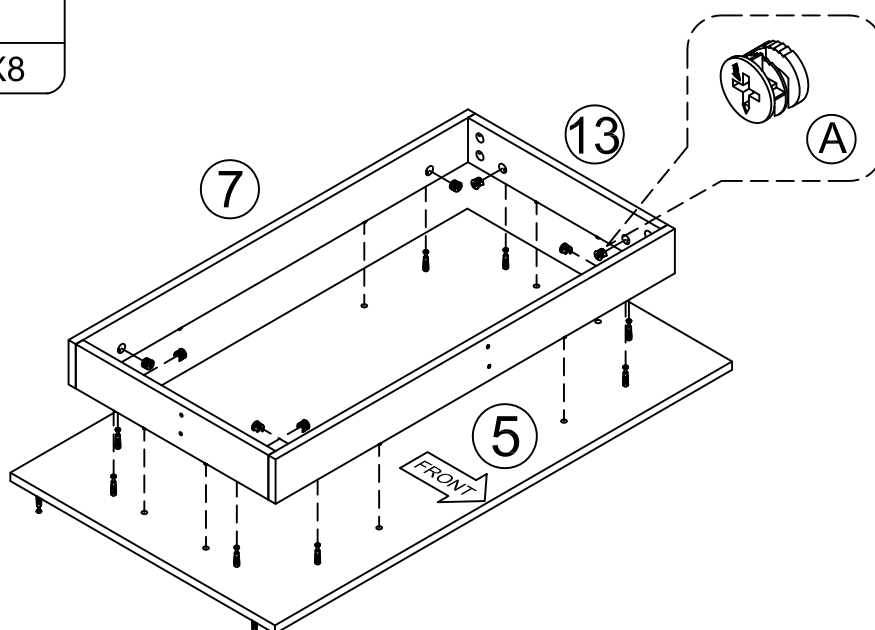



STEP 7

- Stick LED band to the side of the base.
- Fasten the LED band with buckles.

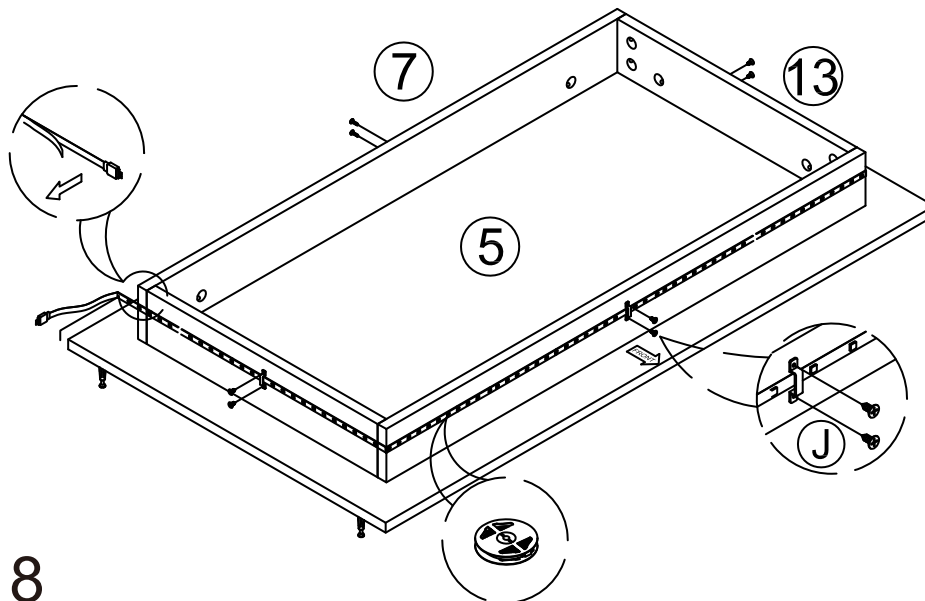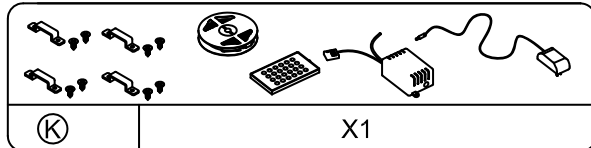



STEP 8

- Attach panel (1) & (2) to (6) with cam locks (A).

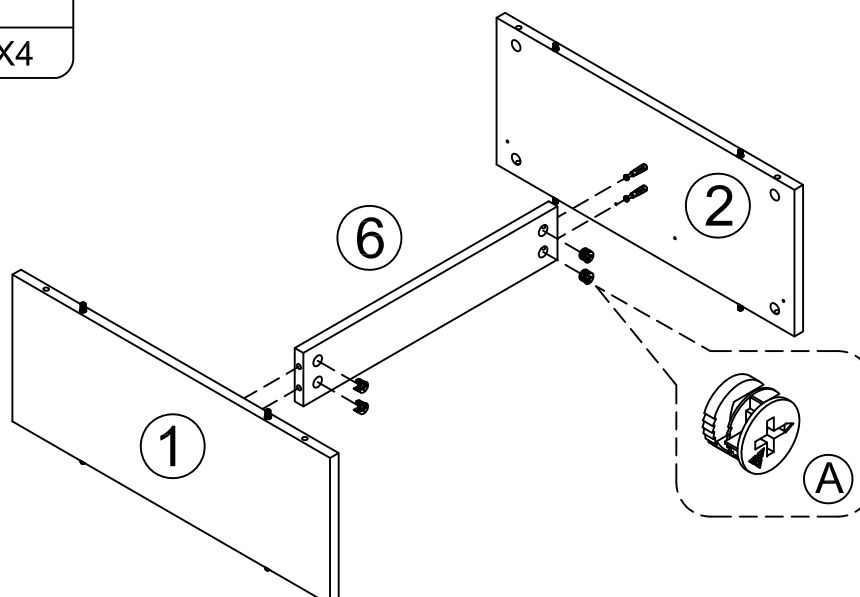






STEP 9

- Attach panel (1) & (2) & (3) to (5) with cam locks (A).

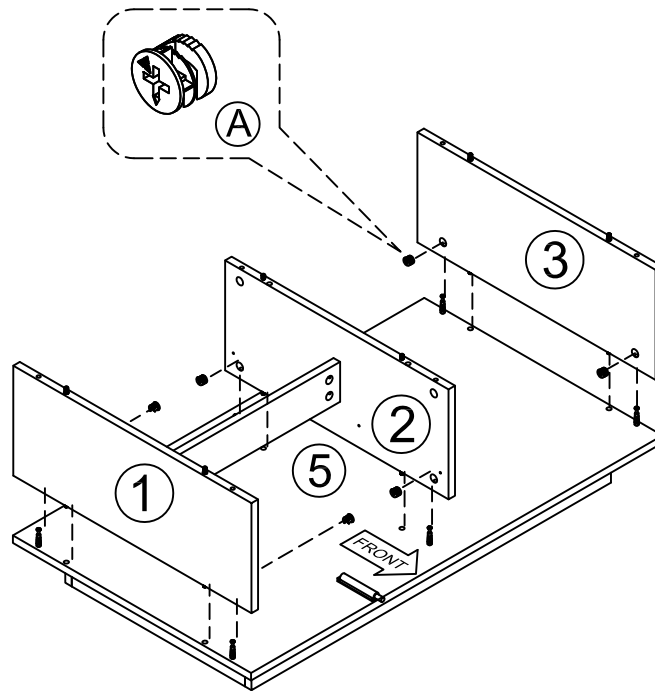



STEP 10

- Install drawer track (F) & (G) to panel (1) & (2) with screws (E).

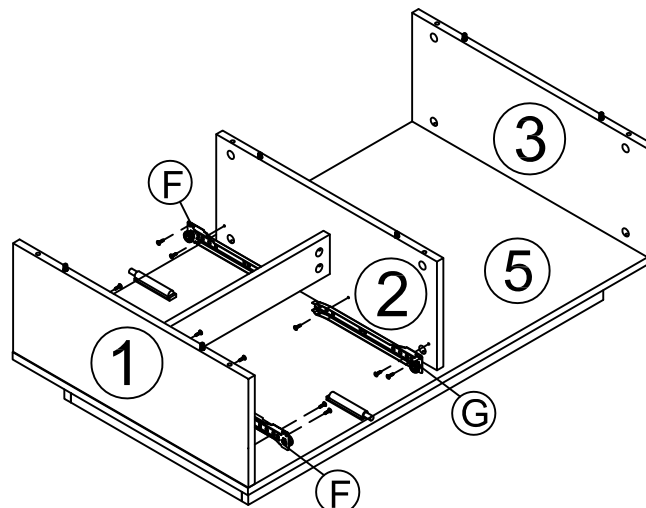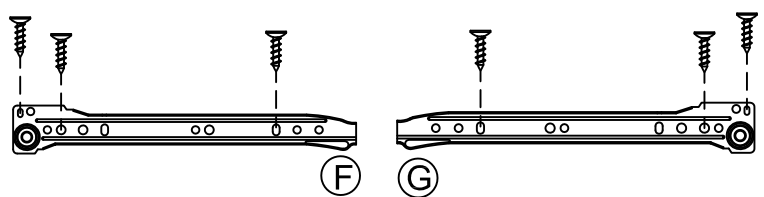



STEP 11

- Attach panel (4) to (1) & (2) & (3) with cam locks (A).

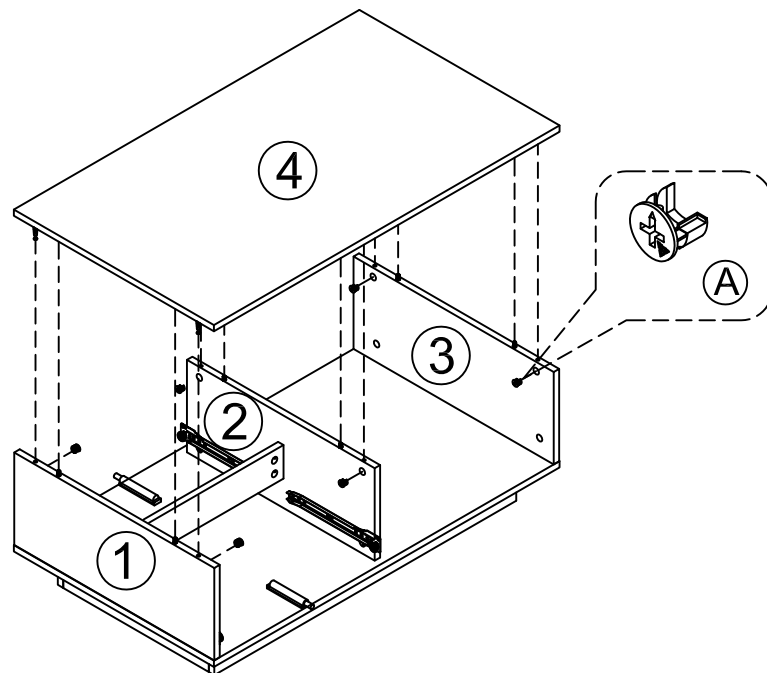

STEP 12



- Attach panel (11) to (9) & (10) with screw (D) as shown in the picture.

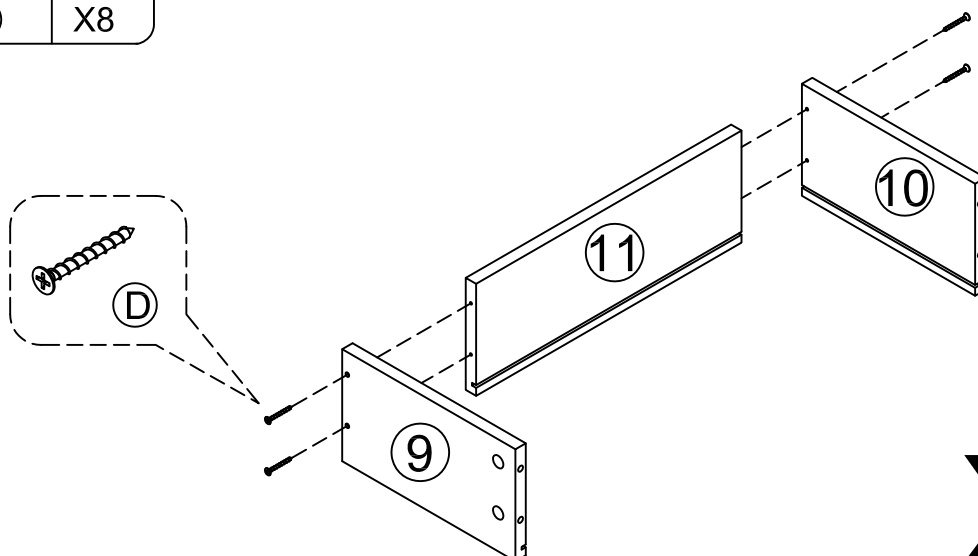

X2



STEP 13

- Screw cam bolts (B) into panel (8) & (14) as below shown.

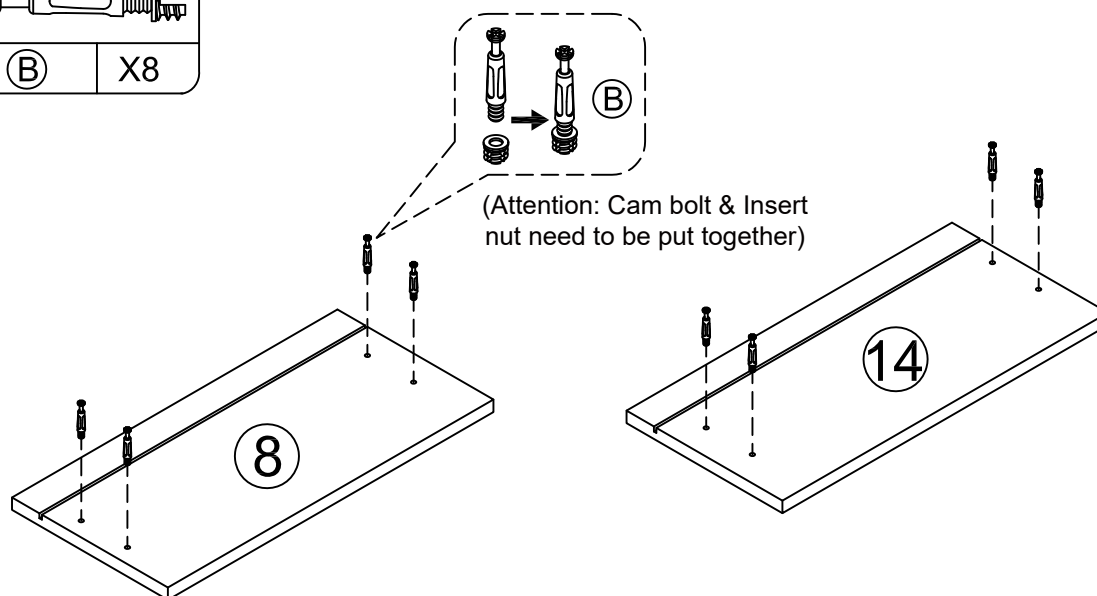


STEP 14

- Insert panel (12) into the grooves.
- Attach panel (8) & (14) to (9) & (10) with cam locks (A).

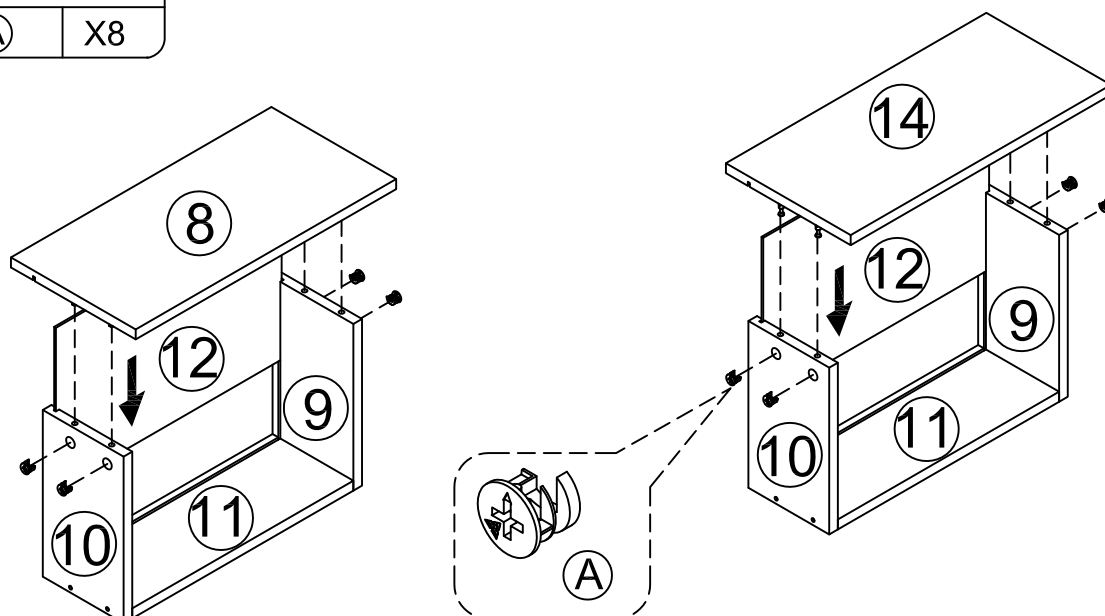


STEP 15

- Install drawer track (H) & (I) to panel (9) & (10) with screws (E).

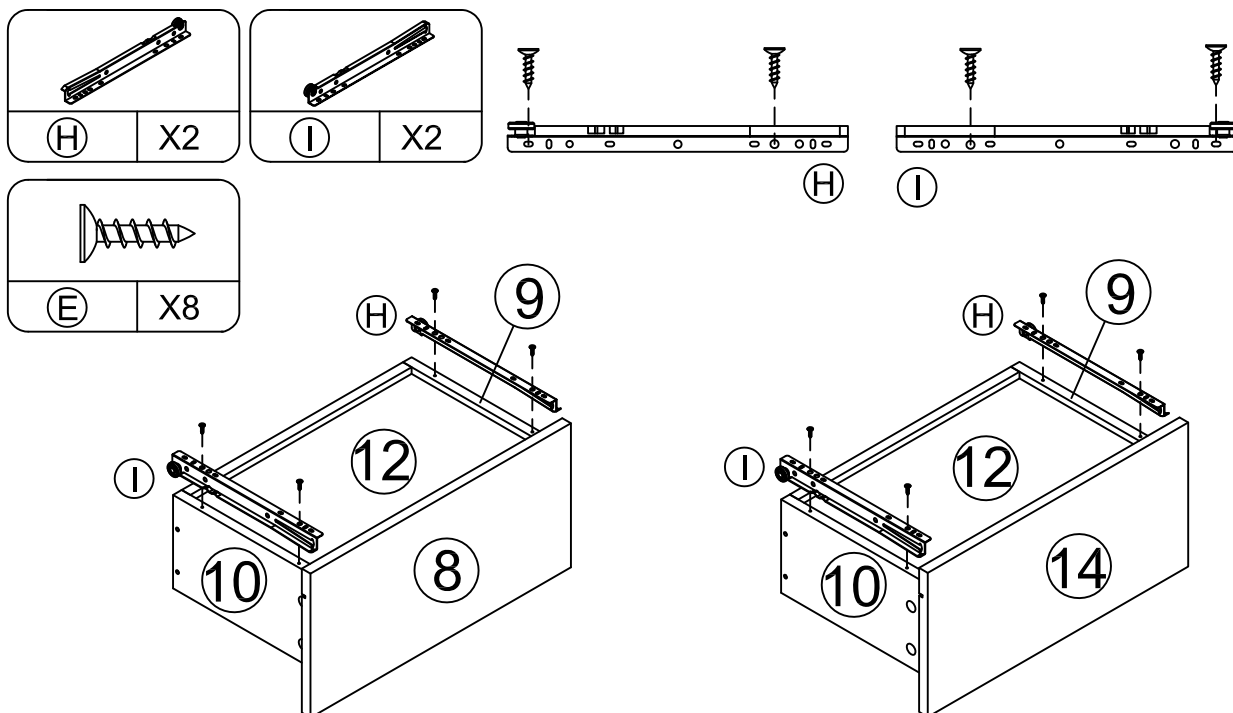



STEP 16

- Insert the drawers.

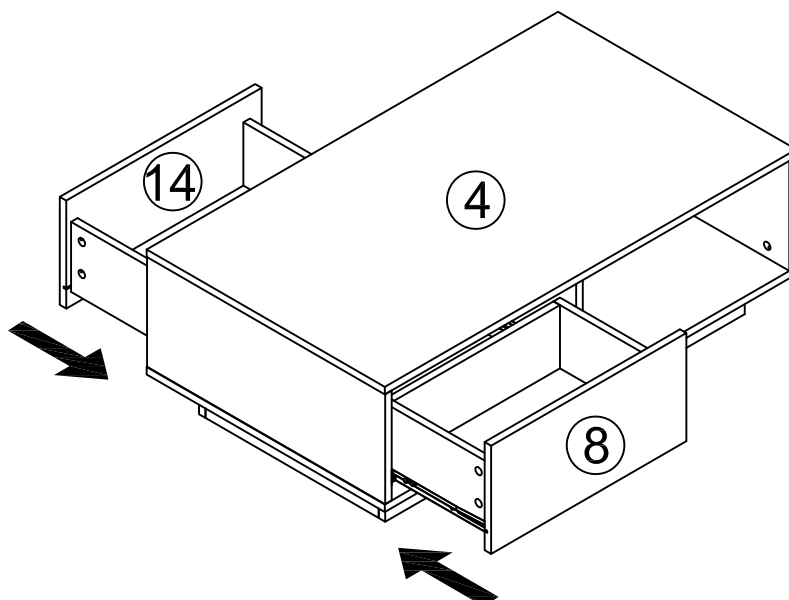

STEP 17

- Connected pin of LED and power adapter to the RGB control box as below.
 - Remove the battery protection pad from remote controller.
- Align remote controller to the RGB Control box to adjust the color mode.
Specifications of battery:cr2025 3v

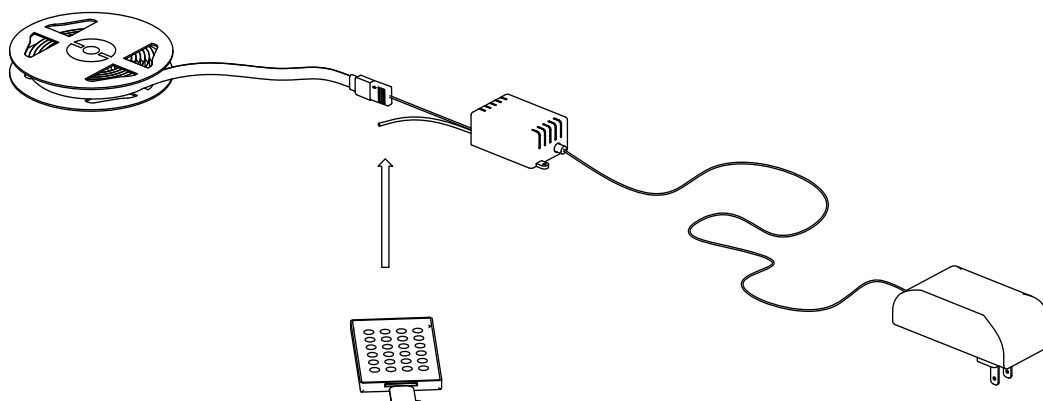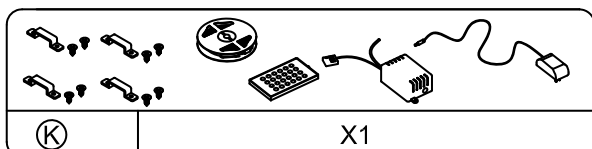

STEP 18

- Installation complete.

