


Dresser Instructions

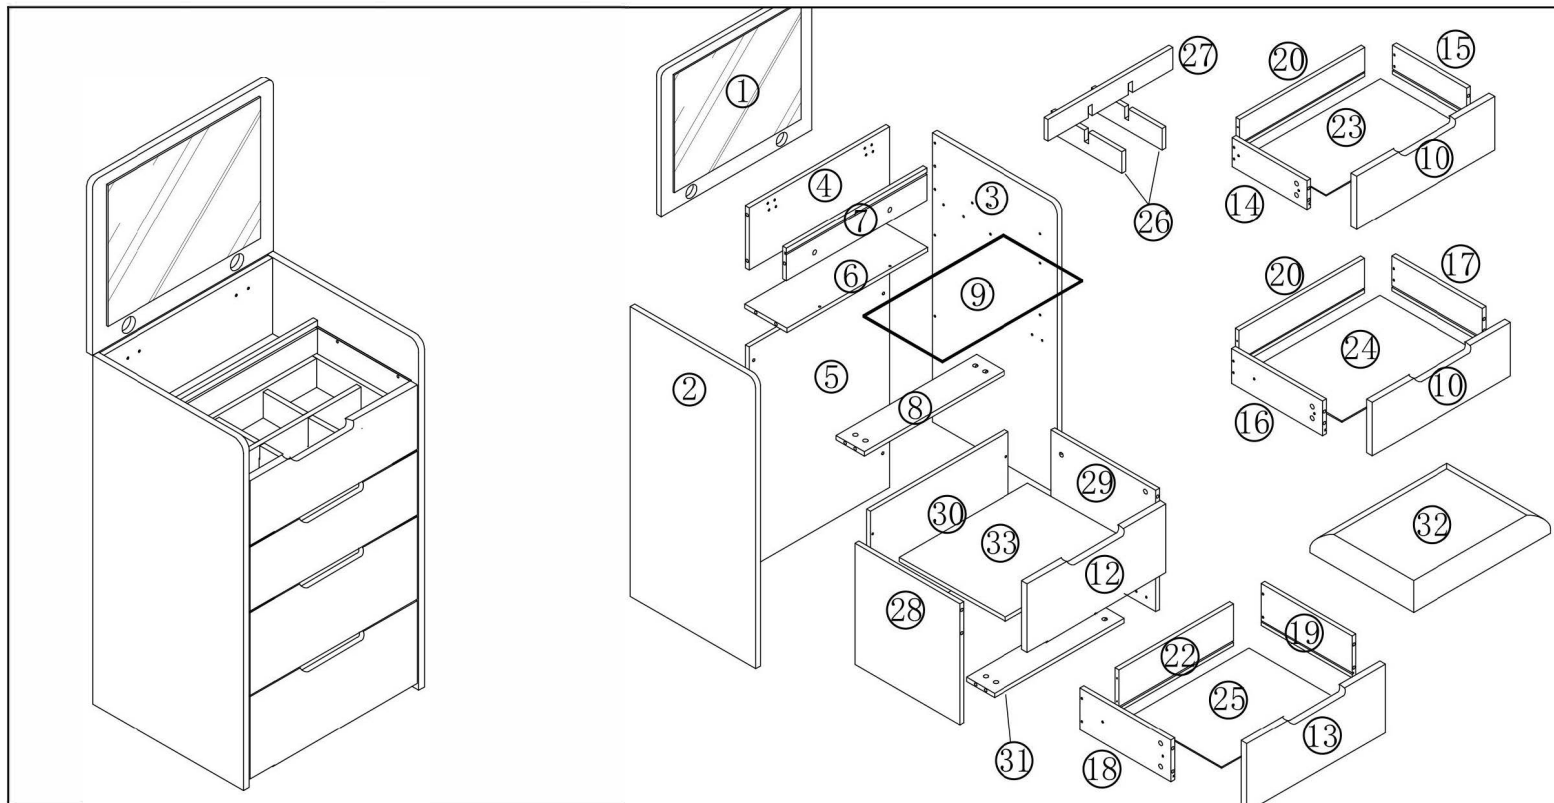


- | | | | | | |
|--------------------------------------|-----------------------------------|--------------------------------|-----------------------------------|---------------------------------|------------------------------|
| 1.Panel 1pc | 2.Left side panel 1pc | 3.Right side panel 1pc | 4.Upper back panel 1pc | 5.Lower back panel 1pc | 6.Laminate 1 pc |
| 7.Clapboard 1pc | 8.Pull strips 1pc | 9.Layer glass 1pc | 10.Upper drawn 2pc (narrower) | 11.No numbering | 12.Fake noodles 1 pc (width) |
| 13.Lower drawer 1pc (wider) | 14.Small left drawer side 1pc | 15.Small Right Drawer Side 1pc | 16.Middle Left Drawer 1pc | 17.Middle Right Drawer 1pc | 18.Large left drawer 1pc |
| 19.Big right draw side 1pc | 20.Upper Draw Tail 2pc (longer) | 21.No numbering | 22.Bottom Draw Tail 1pc (shorter) | 23.Upper bottom draw 1pc | 24.Middle Draw Bottom 1pc |
| 25.Lower Drawer Bottom 1pc (shorter) | 26.Plaid vertical board 2 pc | 27.Lattice horizontal 1pc | 28.Makeup board left side 1 pc | 29.Make-up board right side 1pc | 30.Make-up board back 1pc |
| 31.Make-up Stool Pull Strip 1pc | 32.Make-up Stool Seat Cushion 1pc | 33.Laminate 1pc | | | |

	A	B	C	D	E	F	H	I	J
Name	3-in-1	2-in-1	Door hinges	Silent tracks	Layer pallets	Self-tapping screws		Small corner code	Foot pegs
Graphics									
Specification	Φ12/L=40		Straight bends	10"	Φ8*18	Φ3.5*12	Φ4*30		
Quantity	31 sets	17 pcs	2 pcs	3 groups	4 pcs	50 pcs	13 pcs	2 pcs	10 pcs


3-in-1 instructions for use

- The hole of the side plate is Φ5 in diameter, screw the screw directly into this hole.
- Insert the other end of the screw into the side hole of the other connecting plate, and press the eccentric locking cake into the Φ12 diameter hole, and note that the cross arrow corresponds to the side hole.
- Use a Phillips screwdriver to tighten the eccentric locking cake clockwise.

2-in-1 instructions for use

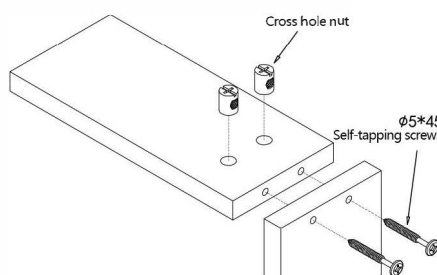


Instructions for use of the track

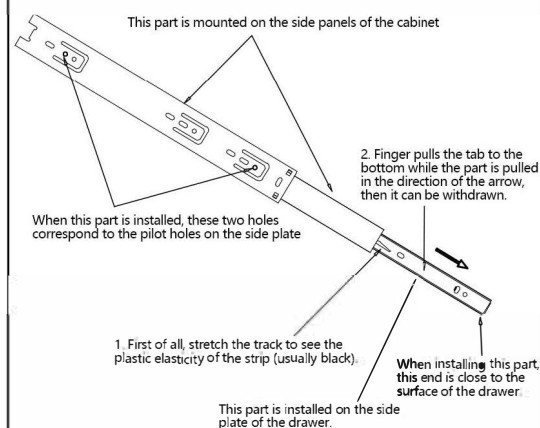


Installation steps

Step 1: Connect the partition and upper back plate with the shelf with a 3-in-1.

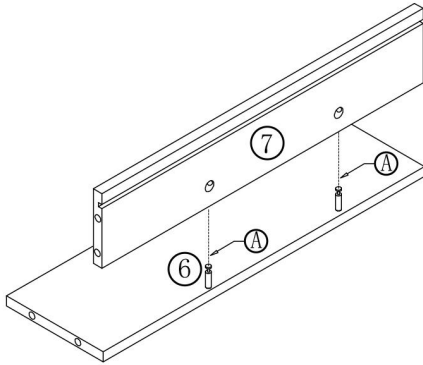


Step 2: Install the tie strips, lower back plate and left and right side panels.

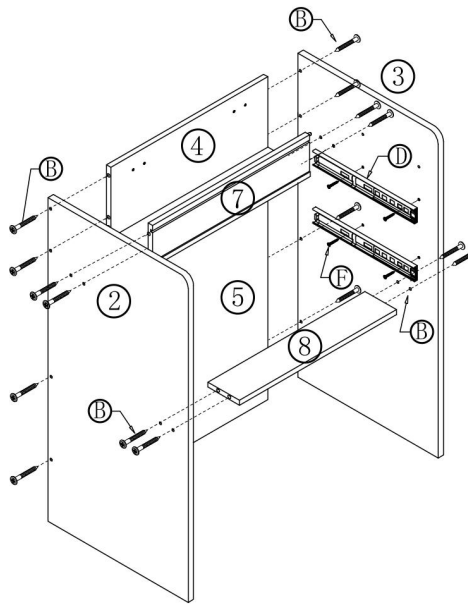


Note: The side plate is pre-installed with $\Phi 3.5 \times 12$ screws according to the lead hole.

Step 3: Nail the foot pegs first, and then install the panel.

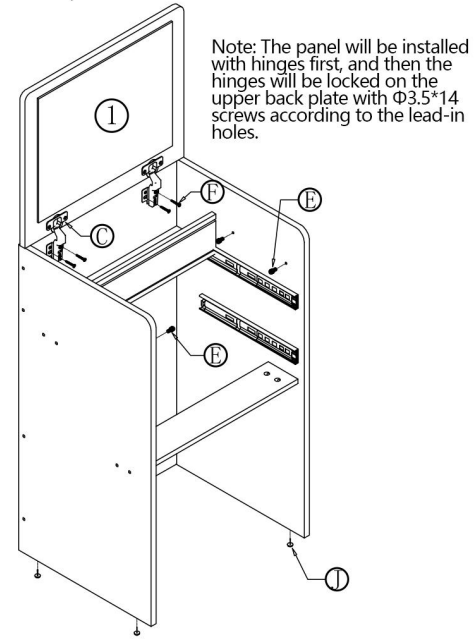


Step 4: Assemble the side panels of the makeup stool and the pull bar with 3-in-1 according to the picture.


Note: Nail the side panels of the stool first, and use $\Phi 3.5 \times 12$ screws to install the rails according to the lead holes.

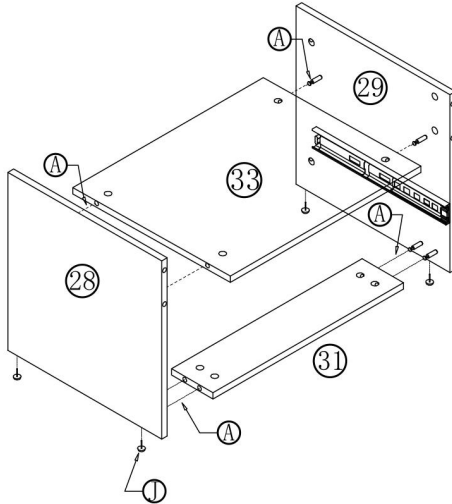

Step 5: Install the back of the stool and the false drawer.

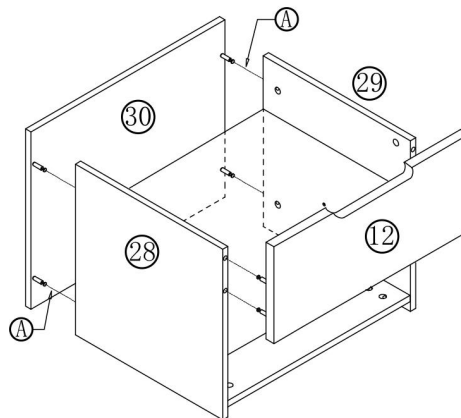


Step 6: Install the seat cushion

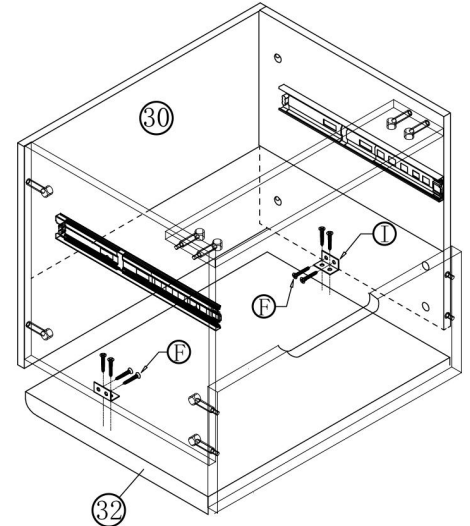


Note: Place the seat cushion in the appropriate position, place the stool upside down, and fix it in the side panel position with screws and small corner codes.


Step 7: Assemble the drawers according to the drawing.

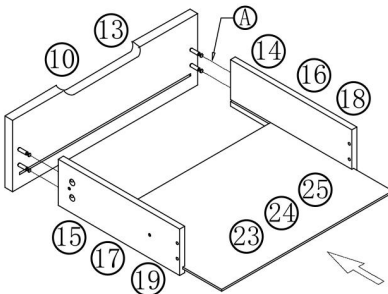

Note: The wider drawer is a makeup bench drawer.

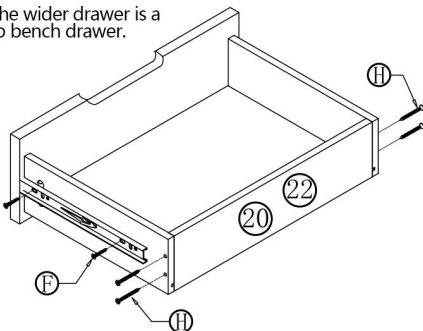

Step 8: Install the laminated glass and drawers.

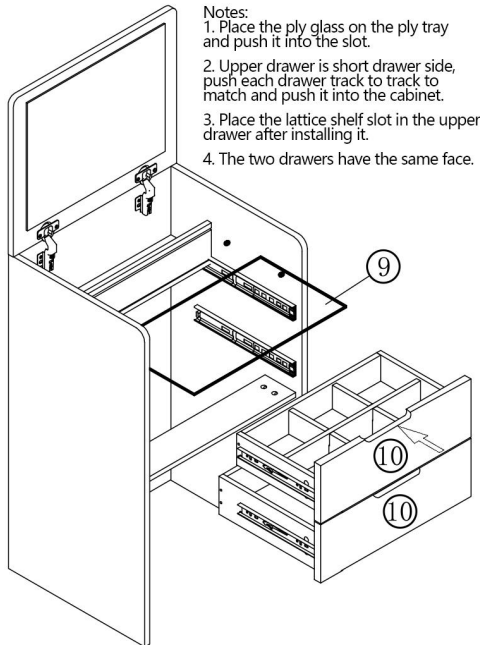

Step 9: After installing the drawers, push them into the cabinet.

