


## Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

## Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the cover of the power supply on the back of the mirror to test the power cables, tighten the cables if they are loose. ( Please cut off the power firstly before testing the power supply and cables)
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.

## Front & Backlit LED bathroom mirror User Manual

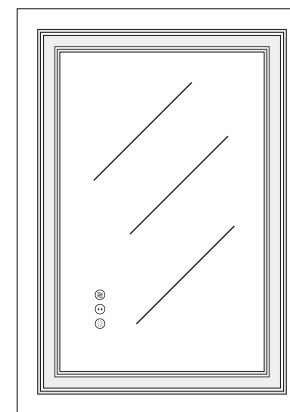

## Before Installation

### Please Note Before Installation:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, first check if there is transit damage or missing parts.
3. Please power the mirror with plug to test the mirror and each functions before installation.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
9. Before cleaning the mirror, make sure that the power supply is disconnected.





### Please Notes:

Due to the workmanship production process of the items, the size error does not exceed 1-2 inches.


## Specifications and Parameters

Product No.	Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power (W)	Input Voltage (V)	Weight (kg)
KM007-S1 R5070UL	20"x28"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	4501	90	48	100-120V	5.45
KM007-S1R6080UL	24"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	5446	90	60	100-120V	7.01
KM007-S1R6090UL	24"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	5919	90	60	100-120V	7.78
KM007-S1R7090UL	28"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6392	90	60	100-120V	8.70
KM007-S1R7691UL	30"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6708	90	90	100-120V	9.16
KM007-S1R8181UL	32"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6462	90	90	100-120V	8.88
KM007-S1R9090UL	36"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7318	90	75	100-120V	10.80
KM007-S1R9696UL	38"x38"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7880	90	90	100-120V	11.90
KM007-S1R10060UL	40"x24"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6392	90	60	100-120V	8.40
KM007-S1R10070UL	40"x28"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6840	90	90	100-120V	9.58
KM007-S1R10076UL	40"x30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7123	90	90	100-120V	10.16
KM007-S1R10080UL	40"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7318	90	75	100-120V	10.75
KM007-S1R10091UL	40"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7842	90	90	100-120V	11.90
KM007-S1R12080UL	48"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8283	90	100	100-120V	15.10
KM007-S1R12176UL	48"x30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8149	90	90	100-120V	16.07
KM007-S1R12191UL	48"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8897	90	100	100-120V	17.05
KM007-S1R121100UL	48"x40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9284	90	100	100-120V	20.95
KM007-S1R13975UL	55"x30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8945	90	100	100-120V	16.25
KM007-S1R13991UL	55"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9686	90	100	100-120V	18.63
KM007-S1R15070UL	60"x28"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9228	90	100	100-120V	16.50
KM007-S1R15076UL	60"x30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9487	90	100	100-120V	17.48
KM007-S1R15090UL	60"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	10174	90	150	100-120V	20.40
KM007-S1R18181UL	72"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11238	90	150	100-120V	22.19
KM007-S1R18191UL	72"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11734	90	150	100-120V	24.65
KM007-S1R181100UL	72"x40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12121	90	150	100-120V	27.11
KM007-S1R19591UL	77"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12333	90	150	100-120V	26.42
KM007-S1R21380UL	84"x32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12656	90	150	100-120V	25.45
KM007-S1R213100UL	84"x40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13600	90	150	100-120V	30.32
KM007-S1R22396UL	88"x38"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13884	90	150	100-120V	31.03
KM007-S1R24091UL	96"x36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	14476	90	150	100-120V	32.01

# Installation Instruction
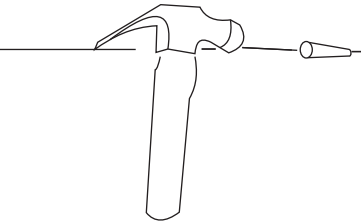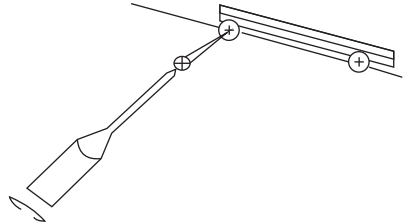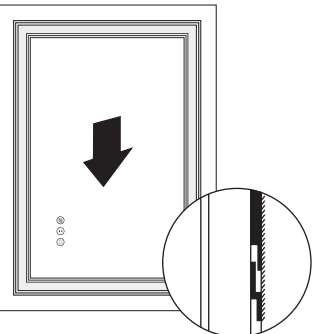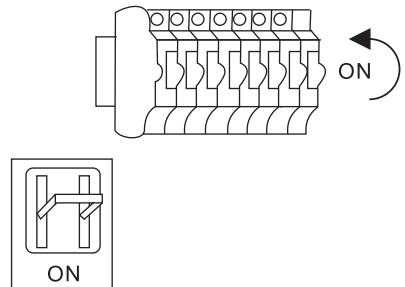
<p>Step 3</p>  <p>Knock the nail in.</p>	<p>Step 4</p>  <p>1. Tighten the screw to ensure the wall bracket stay sturdy on the wall. 2. Hang the mirror on the wall bucket .</p>
<p>Step 5</p>  <p>When installing, pay attention to follow the direction of the switch (easier to operate) to install.</p>	<p>Step 6</p>  <p>Turn on the power switch.</p>

# Check Functions

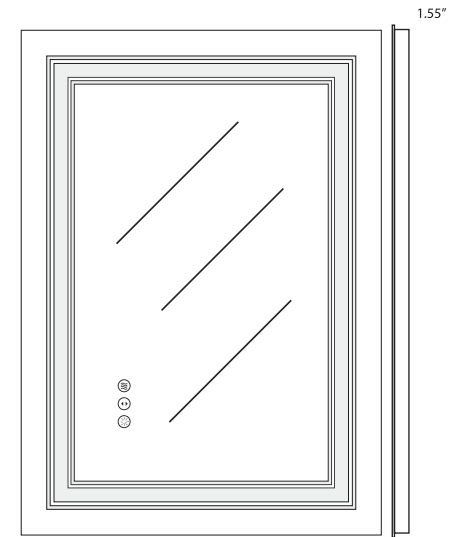

## Before installation, please check to make sure these functions work properly:



**Anti-fog Switch:** After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after its turned on , so you can turn it on 10 minutes before taking a bath.




**Dim switch:** The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the button each time.




**Color temperature switch:** The front and back lights all have three color temperatures that can be switch (3000K / 4000K/ 6000K ), just need to short press this button. And this button has a memory function as well.


# User Manual

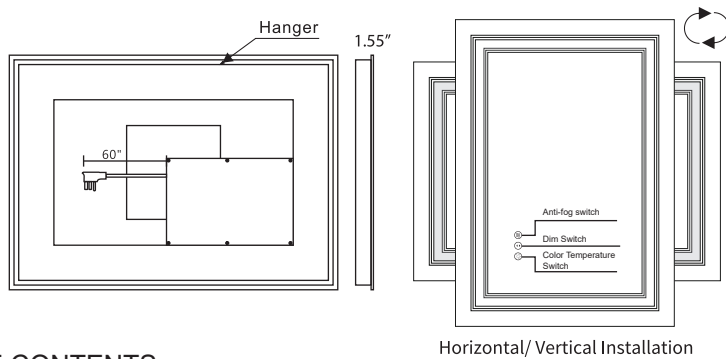

## PACKAGE CONTENTS

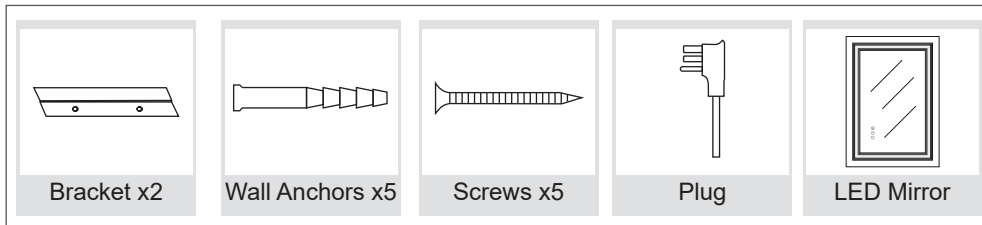

## YOU MAY NEED THESE TOOLS

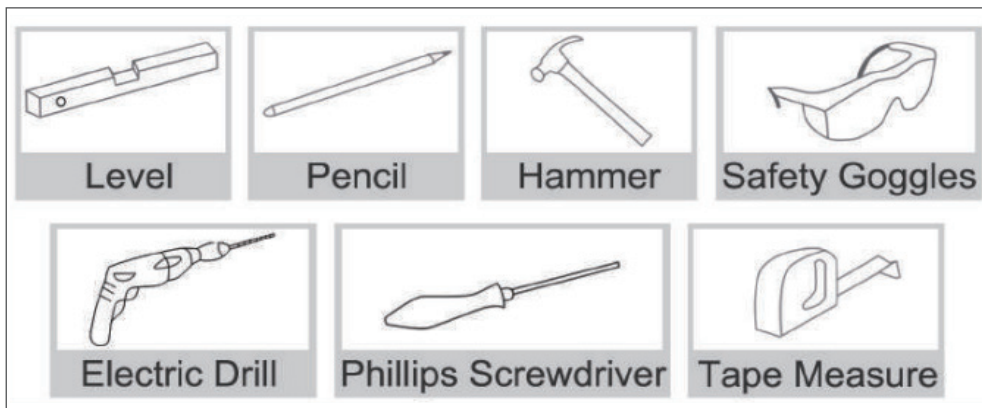

# Installation Instruction

Method 1: Plug in	Method 2: Hardwire
<p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p>	<p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p>
Step 1	Step 2
<p>Draw a straight line with a ruler to keep the mirror horizontal.</p>	<p>Drill 2 holes or 4 holes according to screws you received. (After installing, please tear the protective film of the mirror then to use.)</p>