


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

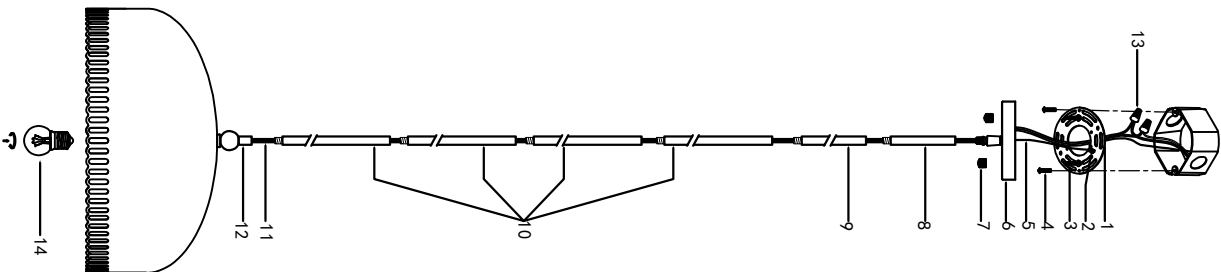

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

- Step A: Thread the wire (11) through the rod (10, 9, 8), canopy (6), and secure it tightly to the lamp body bracket (12).
- Step B: Secure the mounting plate (1) to the junction box using screws (4).
- Step C:
- Connect the positive main wire (marked with text) to the positive power supply wire (+) with a wire connector (13).
 - Similarly, connect the negative main wire (marked with a zigzag pattern) to the negative power supply wire (-) with a wire connector (13).
- Notice: Ensure no bare wire is exposed to prevent electrical leakage.
- Secure the fixture ground wire (5) and external ground wire to the mounting plate (1) using the green screw (2).
- Step D: Pass the bolt from the mounting plate (3) through the two small holes on the canopy (6). Secure the lamp in place using decorative screw (7).
- Step E: Insert the bulb (14) (not included) into the socket as indicated.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.