


Smart Bird Feeder

Product ID. 7AJFK



Scan for Support
support@garvee.com

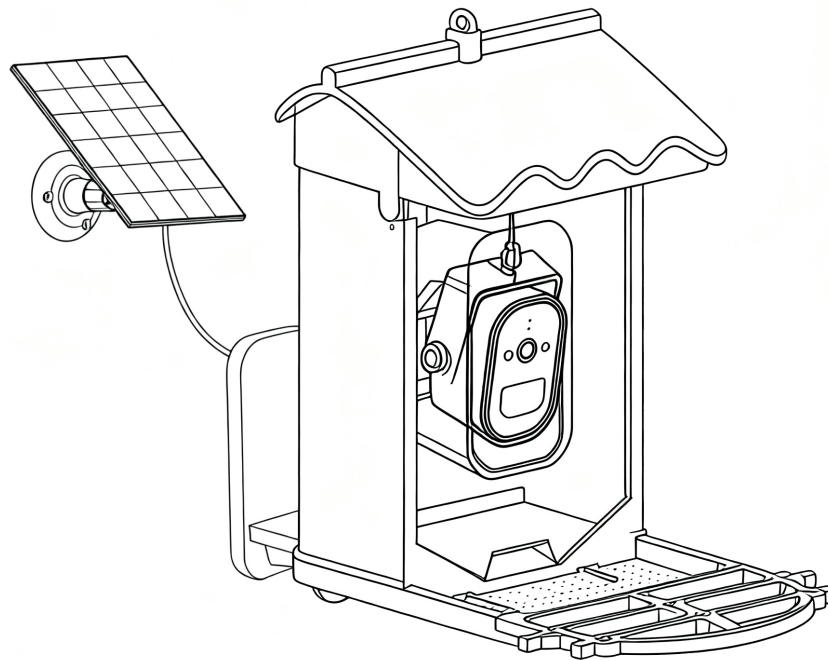

Distributed by
GARVEE.com


V251028GD2E

Smart Bird Feeder

Product ID. 7AJFK




Scan for Support
support@garvee.com

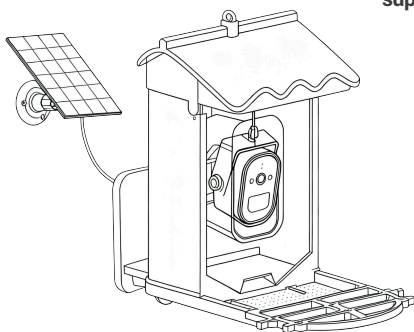

GARVEE.com

V251023EBQK

Packing list



Host



Granary cover



Bird Standing Stands



Base fixing bracket



7W solar charging board
+Fixed bracket



Antenna



Nylon fixing strap*2



1.5m Fixed rope




Knob fixing screw*2
+Screw * 1




Operating instructions

Hardware Install

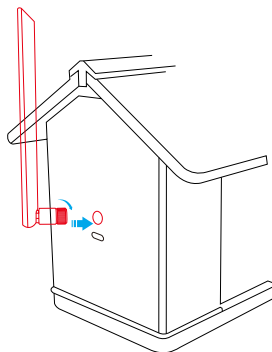


Antenna installation:

1. Insert the antenna into the antenna interface on the back of the body;
2. Rotate the fixed knob clockwise.





Bird standing stands installation:

Insert the standing stands fixing column into the bottom for fixation. Fix the groove and gently press until stable.



Installation of the top cover



1. Align roof accessories
2. Close the roof along the card slot
3. Connect the roof to the body

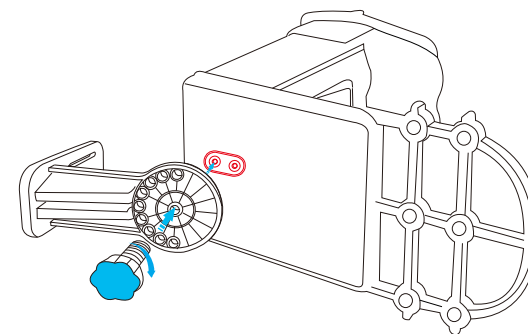

Fixed bracket installation:

The knob fixing screw passes through the bottom of the bracket's screw hole, clockwise rotation, fixed on the bottom plate of the body.

Main Controller

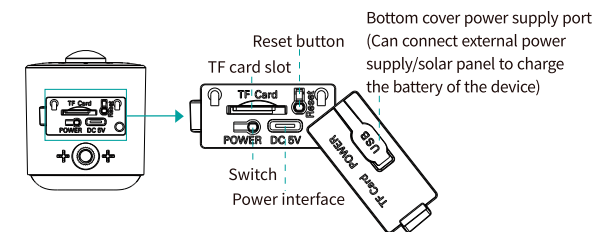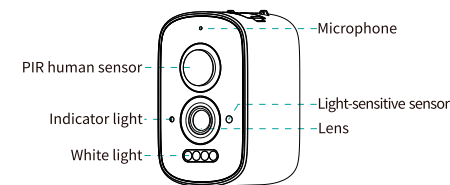

Power switch: Press and hold for 3-4 seconds to turn on/off the device, and you will hear a prompt sound.

The blue light is constantly on: the device has been awakened and is working normally.

Blue light flashing: device is connecting to the internet

Blue light flashing slowly: device waiting to connect to the internet

Blue light off: device in low-power standby/power off state

Reset button: Long press for 5-10 seconds to restore the device to factory settings




When the device indicator light turns red or the APP receives a low battery alarm, please charge the device immediately, otherwise the battery will be depleted. The host will not be able to open at all times. Before plugging or unplugging TF/SD card, please turn off the power first. It is recommended to activate cloud services.

Download and install app




Scan the QR code to download or search "icsee" in mobile application market to download.

Run icsee app register an account or Login through third-party authorization




1. Turn on the power.
2. Reset the device.
3. Connect your mobile phone to 2.4G WiFi.
4. Turn on the Bluetooth switch.
5. Blue light flashing slowly.


Install app and Register an account

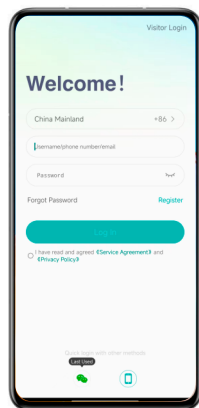



Main Interface

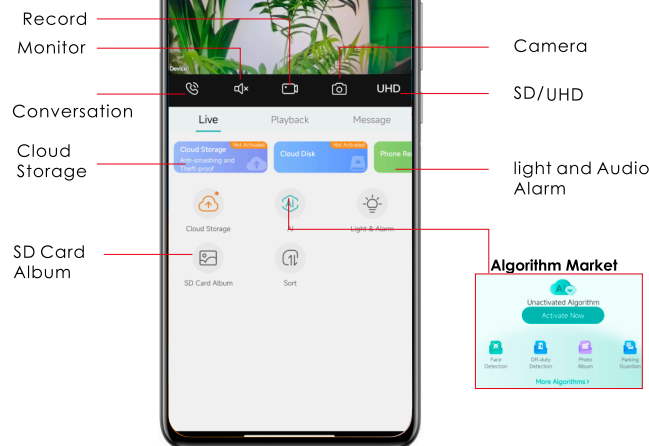

Manage devices

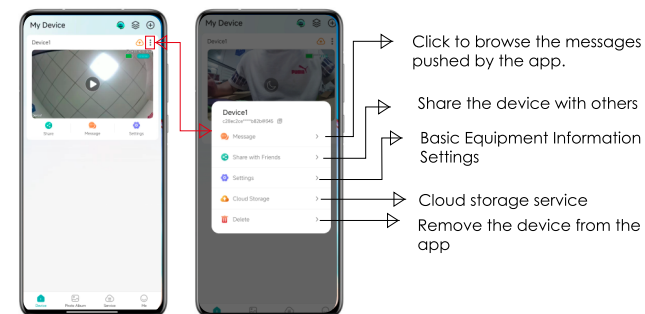


Preparation for networking



Networking

***The device only supports 2.4G WiFi**

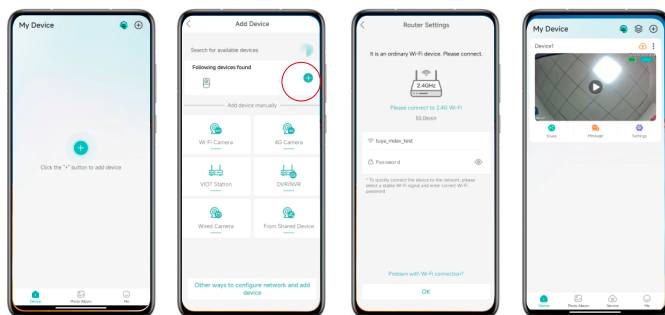

Open Icsee app. Click "+" . Bluetooth will automatically discover the device, click "Confirm". Choose **2.4G WIFI** , enter account and password. The device does not support 5G WIFI. Click on the device icon, enters the function page.

- ◆ **Record:** Click on the video of the admission process from the current time to the termination, which can be stored on TF/SD card or transferred to Cloud storage (requires self activation)
- ◆ **Monitor:** Light up the icon, and the sound around the device can be listened to on the phone
- ◆ **Conversation:** Lighting up the icon allows the device to emit sound as needed
- ◆ **Cloud storage** (requires self activation)
- ◆ **SD card Album:** Click to browse photos or videos stored in TF/SD card
- ◆ **Camera:** Save the current video frame, which can be stored on TF/SD card or transferred to cloud storage (requires self activation)
- ◆ **SD/HD**
- ◆ **Sound and light alarm**
- ◆ **Algorithm Market:** Free selection of required algorithm projects for activation

FAQ

Q: How to save camera records?

1. Local TF/SD card storage, up to 128GB. When the TF card is full, it automatically deletes old videos, Loop recording video.
2. Cloud storage, storing alarm videos on cloud servers, and real-time push of alarm videos Frequency, safe and reliable, you can learn more information on the APP cloud service page.

*When inserting or unplugging TF/SD card, the host power needs to be turned off.

Q: What should I do if I forget my device password?

A: Restore factory settings, reconnect to the internet, and set a new password

Q: Unable to connect to the host/of fine exception during use, what should I do?

1. Check if the host battery is charged and if the wireless network is functioning properly.
2. Press and hold the power button, turn off the power, and restart the camera.
3. Restore factory settings (press and hold the reset button for 6 seconds until you hear "Restore factory settings, Do not turn off the power" and release it, then follow the instructions to add the device again..