


CompactTM Gas Spring

Instruction Manual

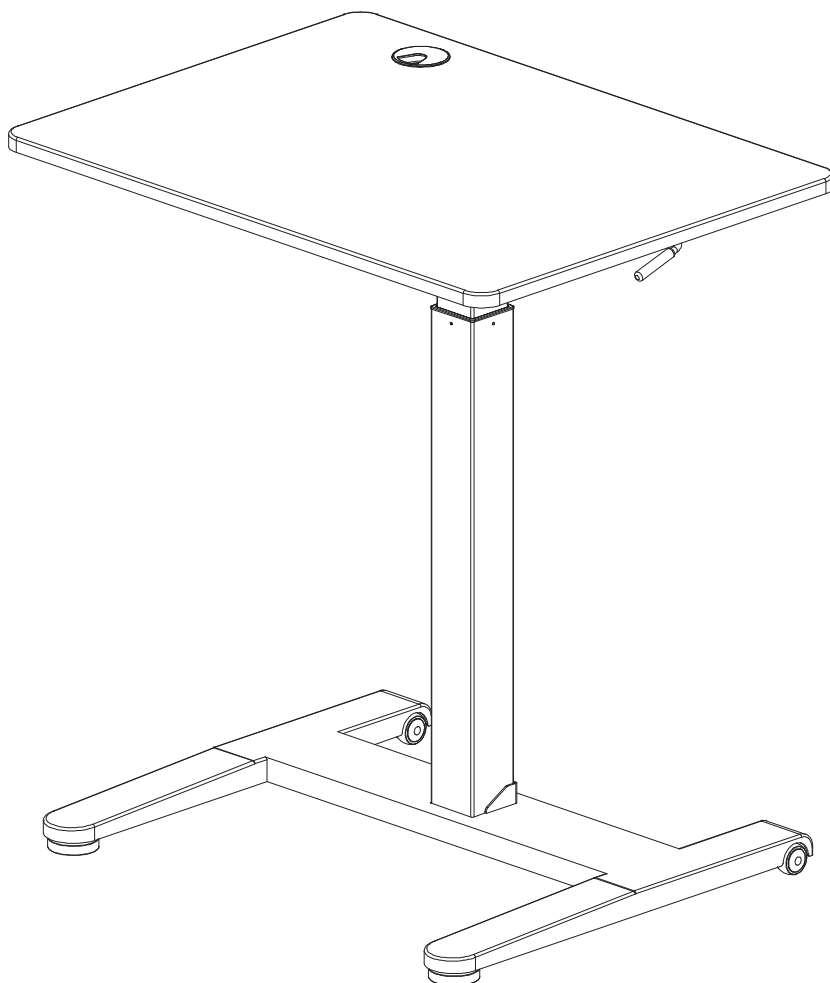

**IMPORTANT : READ THE OWNER'S MANUAL
BEFORE ASSEMBLING**

Model: XD9101

Max Dynamic Load : 15.4 LBS (7KG)
Max Static Load : 100LBS (45KG)
Life duration : 10000 time




Table of contents

Introduction	1	Assembly	4 - 5
Safety Warnings / Maintenance	2	Operational Instructions	5 - 6
Hardware / Tools / Parts	3		

Introduction

Congratulations on taking a STAND for your well-being by purchasing our Sit-to- Stand Desk!

We know that your chair will still be a part of your day, but we are confident that your new Sit-to-Stand Desk will give you a healthy alternative to inactive sitting.

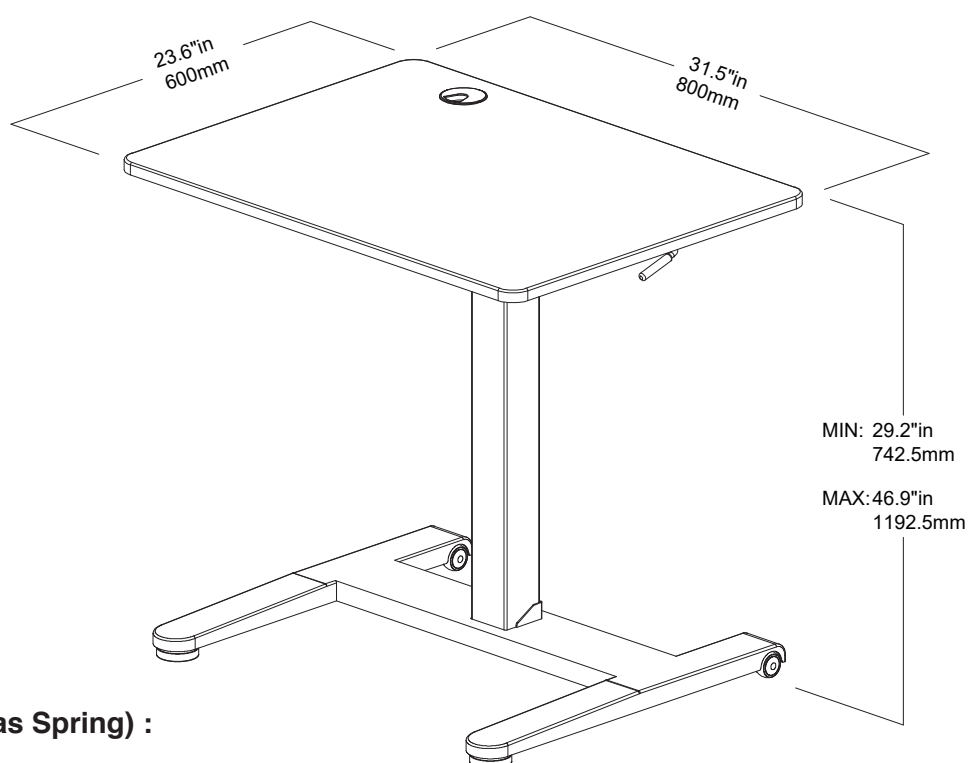

Weight of Compact™ (Gas Spring) :
53 lbs(24.07kg)

Foot Print Size:
31.5" Wide x 23.6" Deep x Min. 29.2" / Max. 46.9" Height



WARNING!

Please do not touch the switch or handle during installation because the height adjustable column will bounce out. This will make installation more difficult and can cause serious injuries.

SAFETY WARNINGS - URGENT PLEASE READ THIS SECTION

We Want You To Safely Use This Product

1. Read the entire manual before assembling and using this equipment. Safe use can only be achieved if the equipment is assembled, maintained and used correctly. All users of the equipment must be informed of all warnings and precautions.
2. CAUTION! Do not exceed the Maximum Listed Weight Capacity of 100 lbs (45kg). Serious Injury or Property Damage may occur.
3. WARNING! Make sure no obstacles are in the desk's path. Make sure the desktop is not touching any walls. Make sure all cords are appropriate length to accommodate the change in height.
4. Do not sit or stand on the desk frame. Do not crawl or lie under the desk frame.
5. Do not place any objects taller than 20" underneath the desk.
6. Do not attempt to raise or lower the desk with any item on the desk. Remove all items before raising or lowering.
7. Do not attempt to move the desk with any items on the desk. Remove all items before moving the desk.
8. Do not use for holding televisions or microwave ovens.
9. Keep young children and pets away from equipment.
10. Inspect and tighten all parts often. Replace any worn parts immediately. Do not use the equipment until the problem has been resolved.
11. If you find any defective components while assembling or checking the equipment, stop immediately.



WARNING!

This height adjustable desk is designed for use in dry work areas only.

The desk height is adjustable so that it can be positioned at the most ergonomically suitable height. Any other use is at user's risk.

Maintenance

The integrity of our Sit-To-Stand Desk can only be maintained when it is regularly inspected for damage and wear. Special attention should be given to the following.

HARDWARE: Verify that all bolts are present and properly tightened.

TIP: Inspect Allen Bolts from time to time. **NOTE:** Do not overtighten Allen Bolts.


LUBRICATION: Periodically add lubrication for smooth operation.

NOTE: This equipment is suitable for home, school and office use only. Do not use in commercial or rental settings. This item was not intended or designed for use in commercial or public places.

Hardware

Note: The images do not represent the actual size.


Tip: Only remove the hardware and tools from the labelled packaging when needed.



A. M8 x 20 Allen Bolt 4pcs



B. M6 x 30 Allen Bolt 4pcs.



C. M6 x 12 Allen Bolt 4pcs.

Tools




D. 4mm Allen Wrench 1pc




E. 5mm Allen Wrench 1pc


Parts

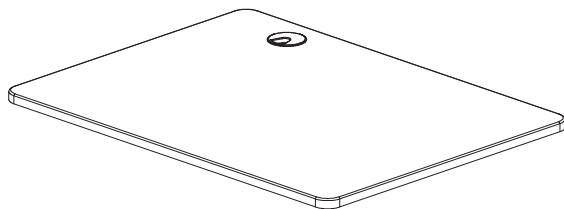


(1) Desktop

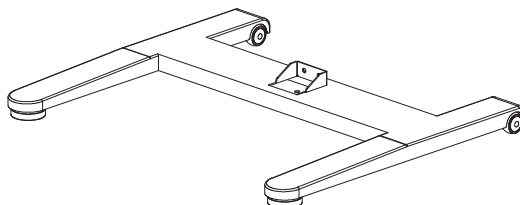

(2) Base

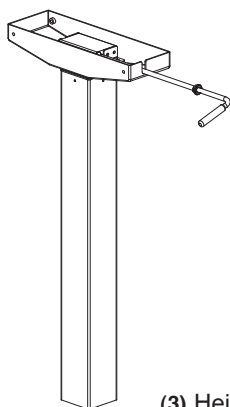


(3) Height adjustable column



(4) Basket


Note: Before assembly, please check all parts carefully.

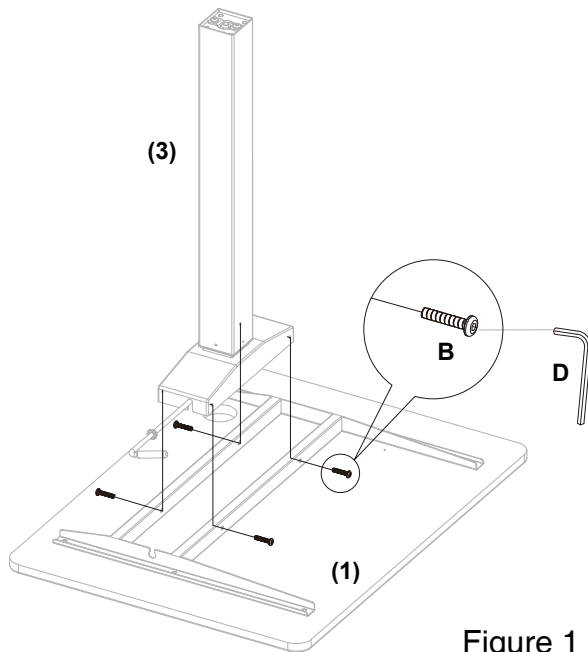

Step 1: While the Desktop (1) is still upside down, slide the plastic ring down, insert into place.

Then attach the Desktop (1) and the Height adjustable column (3) by using the supplied 4 mm Allen Wrench D to tighten the M6 X 30 Allen Bolts B .

Note: Do not overtighten Allen Bolts.

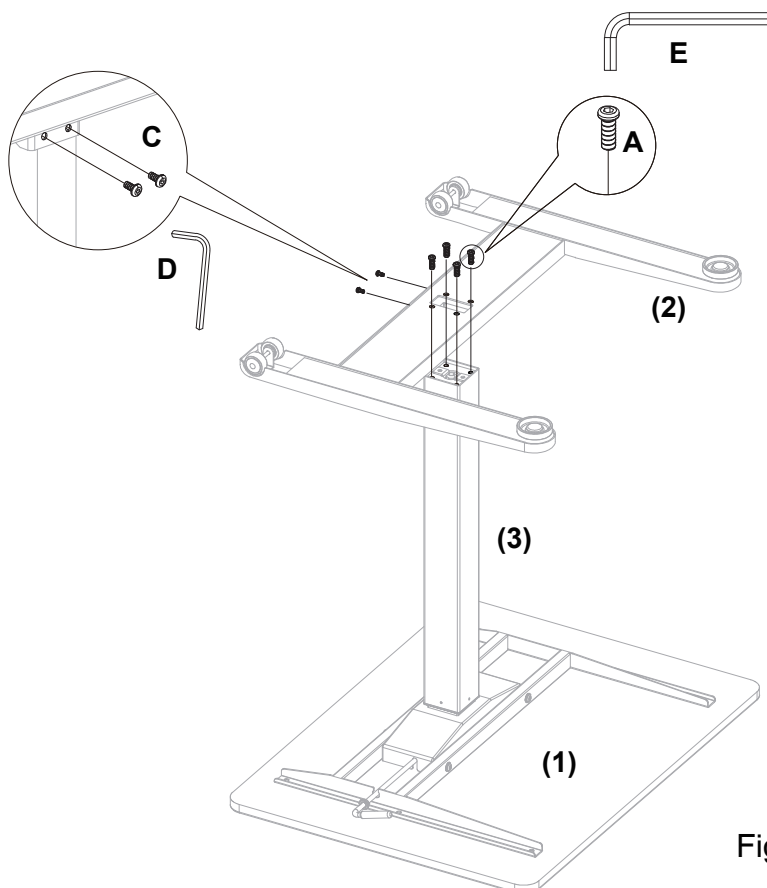

Step 2: Attach the Base (2) to the Height adjustable column (3) by using the supplied 4 mm Allen Wrench D to tighten the M6 X 12 Allen Bolts C

Using the supplied 5 mm Allen Wrench E to tighten the M8 X 20 Allen Bolts A

Figure 2

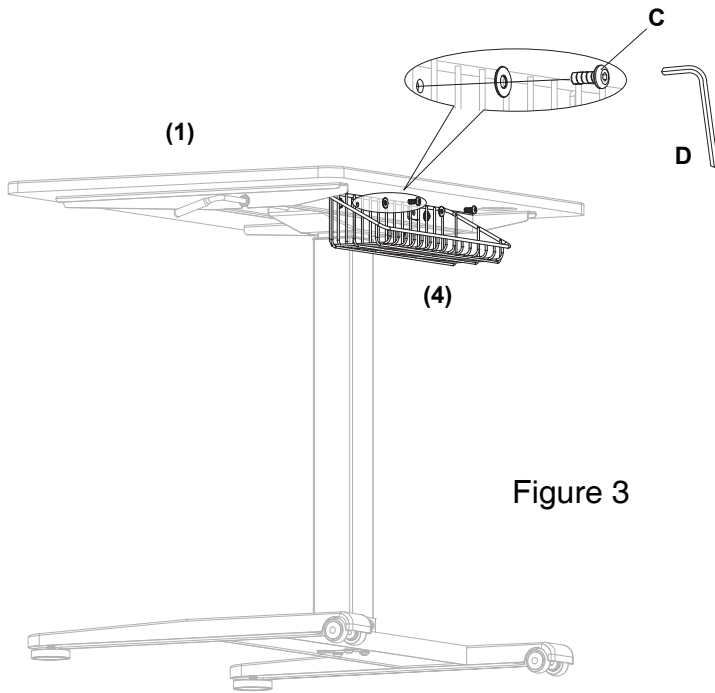


Figure 3

Step 3: Using two M6 x 12 Allen Screws **C** and the 4 mm Allen Wrench **D** tighten the Basket **(4)** to the underside of the Desktop **(1)** .



Operational Instructions

Note: Before operating, please read carefully.

Height Adjustment

Step 1: To adjust the height of the Desktop **(1)** push handle up and hold.

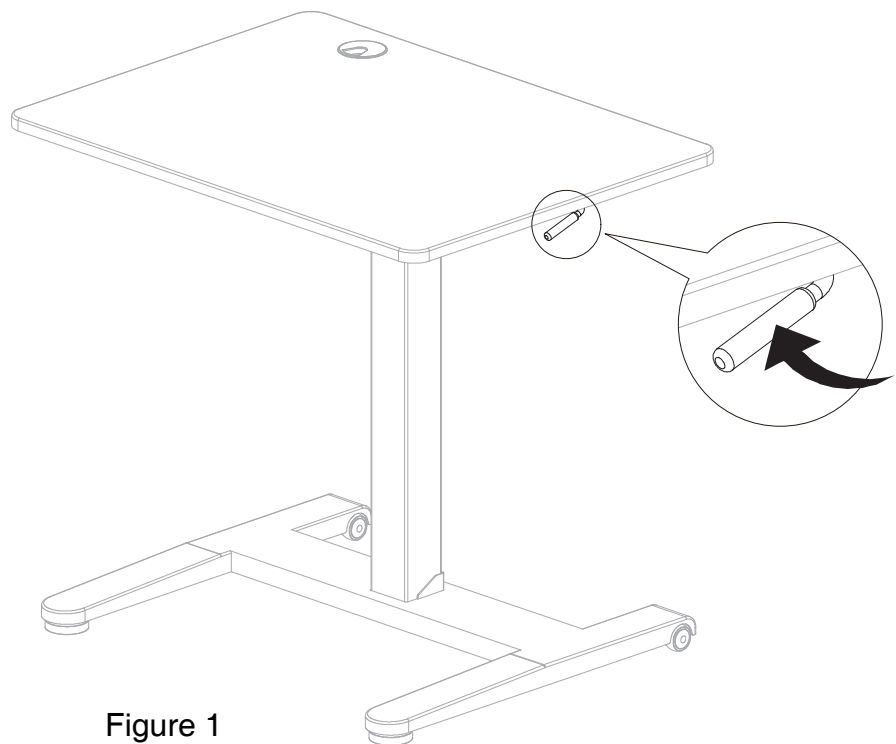


Figure 1

Step 2: Using both hands control the height by pushing down or letting the desk rise.

Step 3: Release the handle to fix at the desired height.

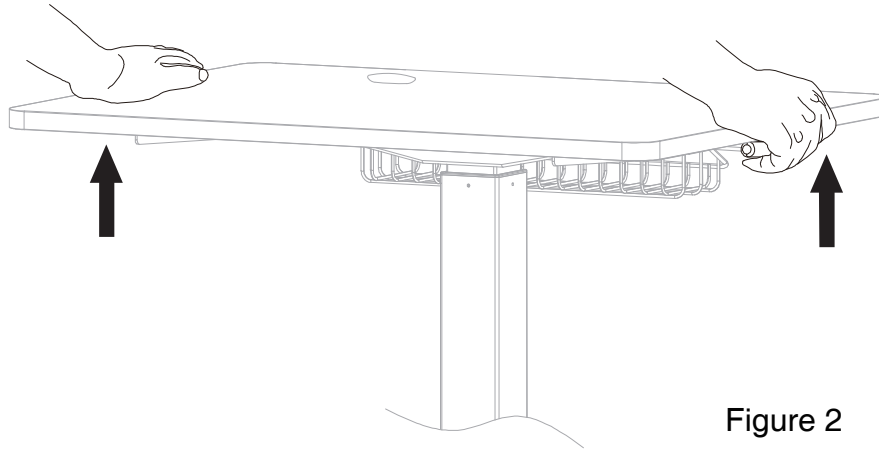


Figure 2



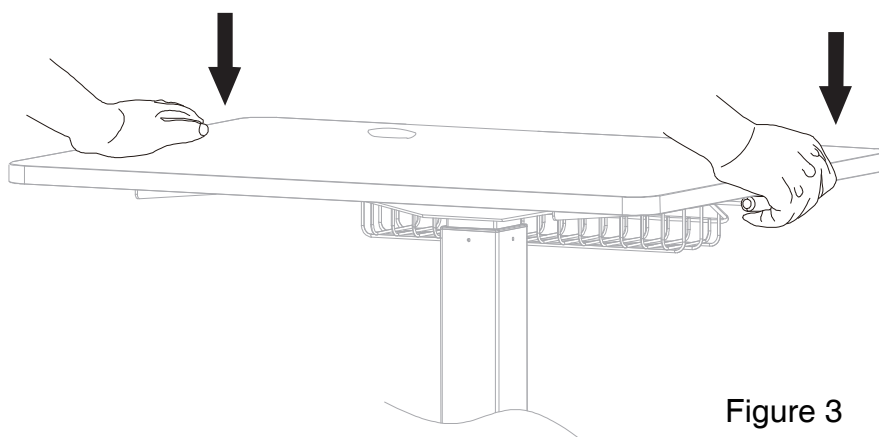



Figure 3

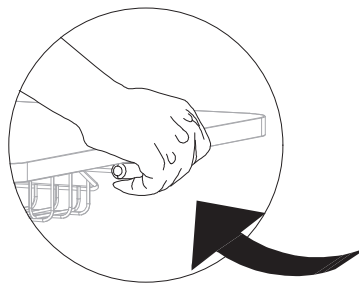

Tip 1: Slight incline the desk to move easily move the desk using the wheels.

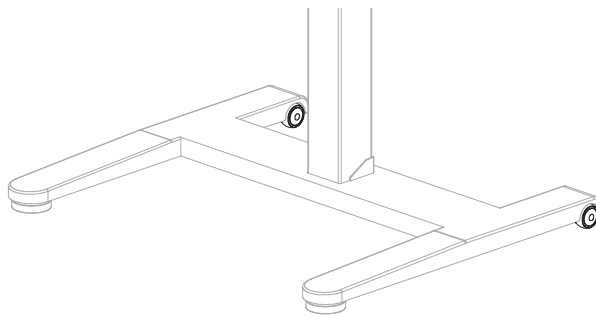

Tip 2: The basket can be use to manage cable avoid storing heaving things.

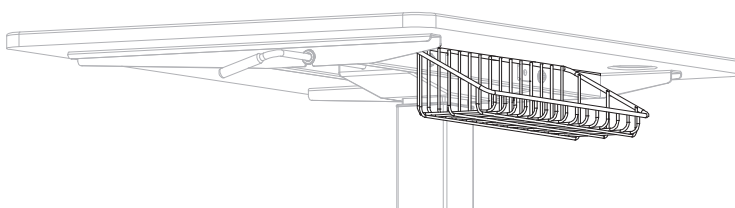

Tip 3: Frontal base can be adjusted to achieve stability on uneven surfaces.

