
DREAMSIDEA

INSTRUCTION MANUAL

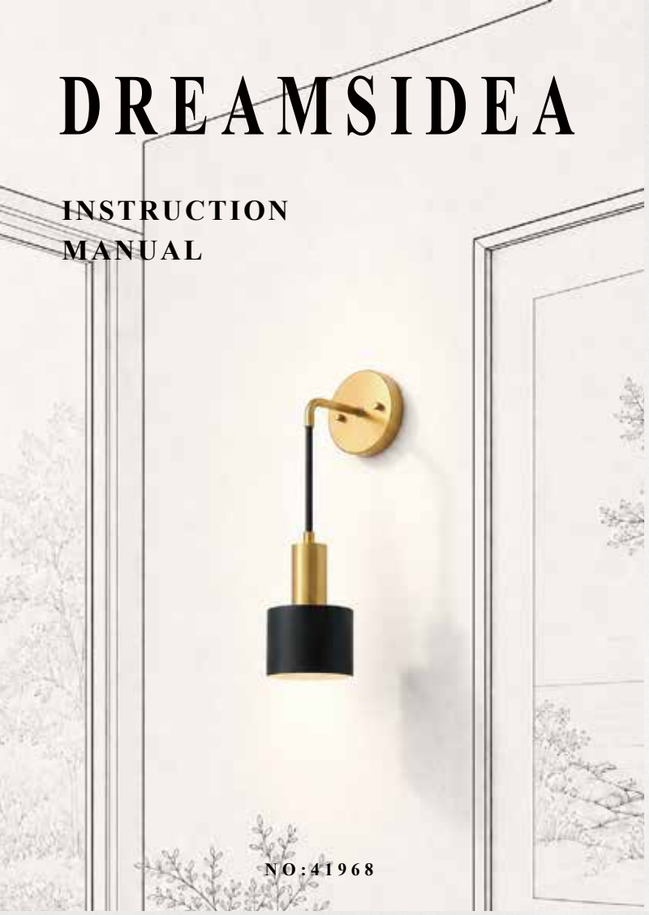

NO:41968

ATTENTION

Please inspect the wires before installation, if the wireshows any cut or abrasion,or has exposed copper wires,

DO NOT use the fixture,it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).Disconnect the power by turning off the electric break for your property(Please ask for professionalhelp if reeded).

DREAMSIDEA

Tel.+1-562-510-9089


E-mail:support@dreamsidea.com

https://www.dreamsidea.com

MAINTENANCE AND WARNING

- Verify the lamp model suits the environmentindoor/outdoor, IP rating) and check all accessories(body, screws, cord, manual).
- Only use with bulbs of the recommended type andwattage. Exceeding the maximum wattage maycause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling
- Clean dust accumulation in recessed lamps regularly(to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire

EXPLODED VIEW

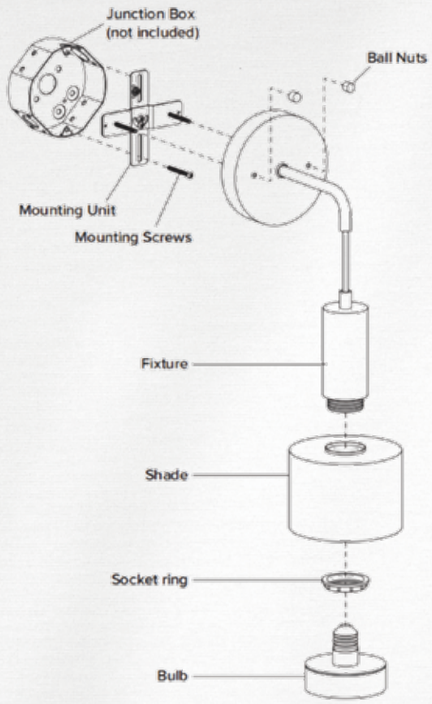



PARTS






TOOLS REQUIRED

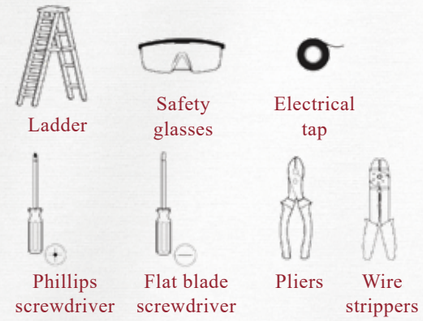

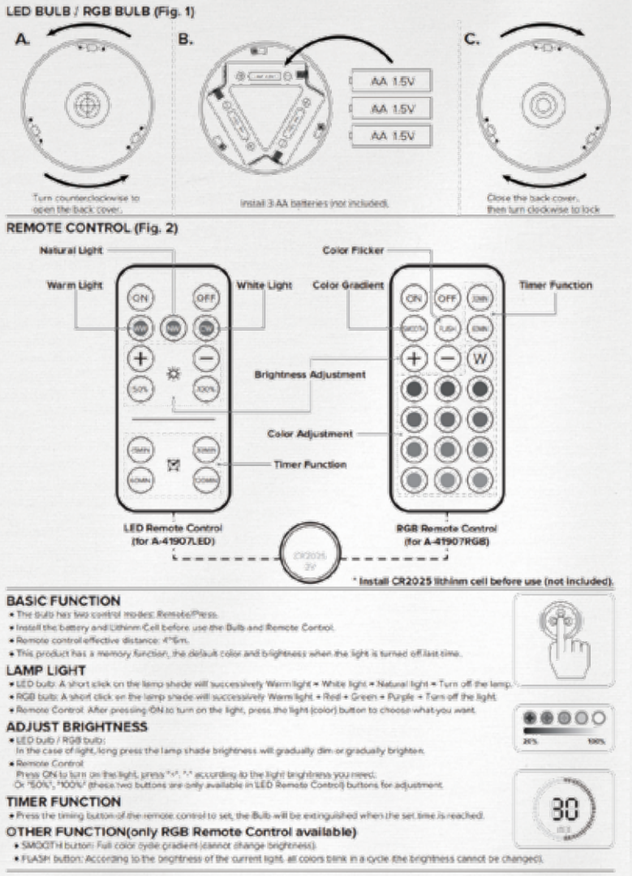


Adjusting Length of cord (if needed), keep at least 6" of wire after adjustment.

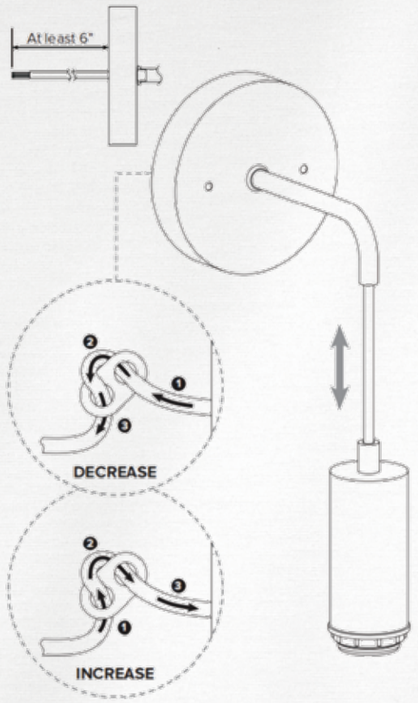


STEP 1 MOUNTING OPTION 1

Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box (not included).

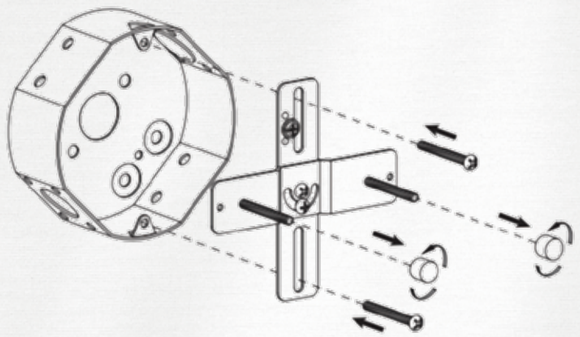

STEP 2

All the wires should wrap with electrical tape (not included).

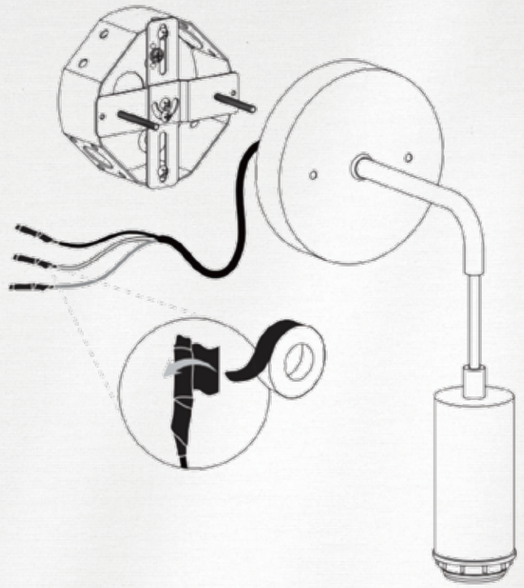


NOTICE

Use the attached bulb that comes with the product and cannot be connected to the household power supply!


STEP 3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with ball nuts.

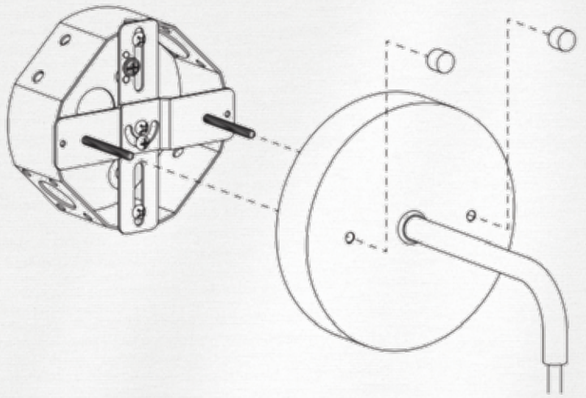

STEP 4

Remove the socket ring from the fixture.
Attach the shade onto fixture using socket ring.
Install LED bulb or RGB bulb.

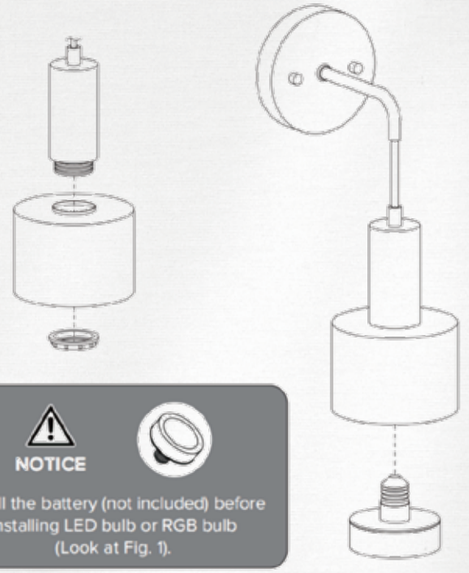


NOTICE

Install the battery (not included) before installing LED bulb or RGB bulb (Look at Fig. 1).

***LED Bulb/ LED Remote Control (for A-41907LED)**
***RGB Bulb/ RGB Remote Control (for A-41907RGB)**


STEP 1 MOUNTING OPTION 2

Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box (not included)

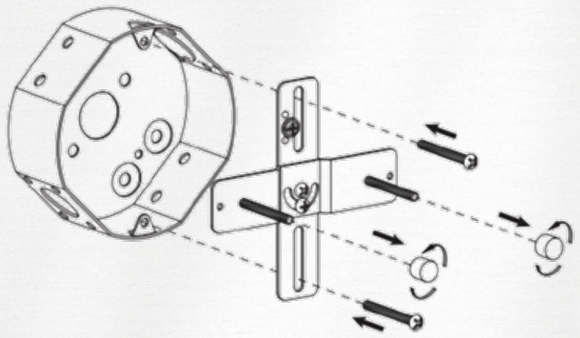


STEP 2

Make the electrical connection from the junction box (not included) to the fixture.Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

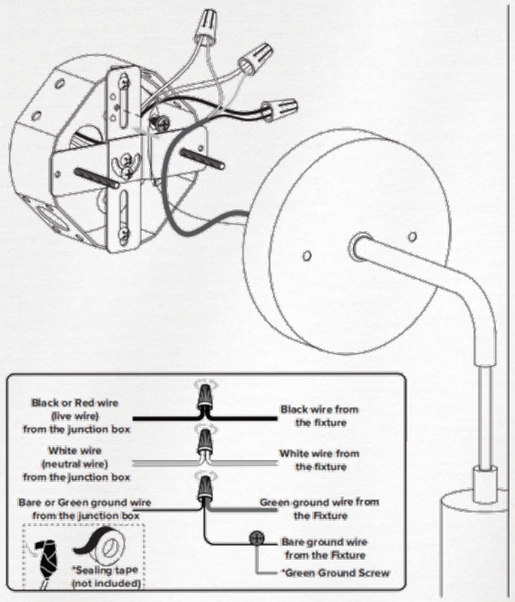


STEP 3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with ball nuts.

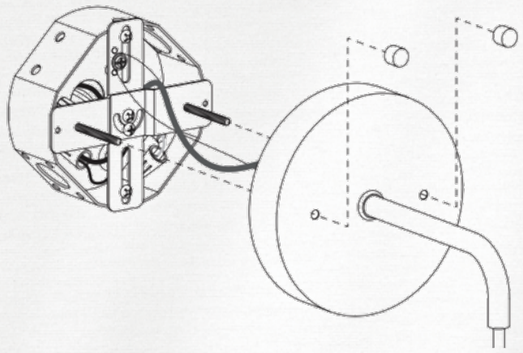

STEP 4

Remove the socket ring from the fixture.
Attach the shade onto fixture using socket ring.
Install bulb (not included).

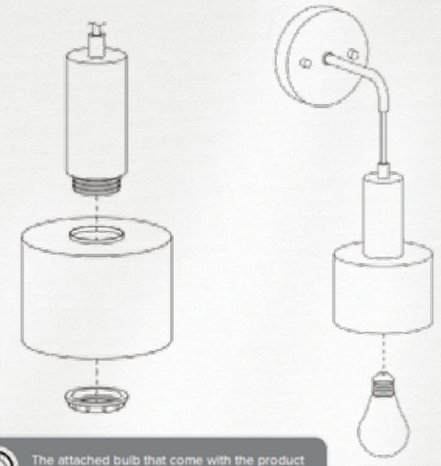

NOTICE

The attached bulb that come with the product cannot be used in this mounting option!

Disconnect the power supply when installing, removing and replacing the Bulb.

This product can be used with 1 base type medium bulb (not included), please turn on the power supply of the connected lamp after installation. See relamping label at socket area or packaging for maximum allowed wattage.