
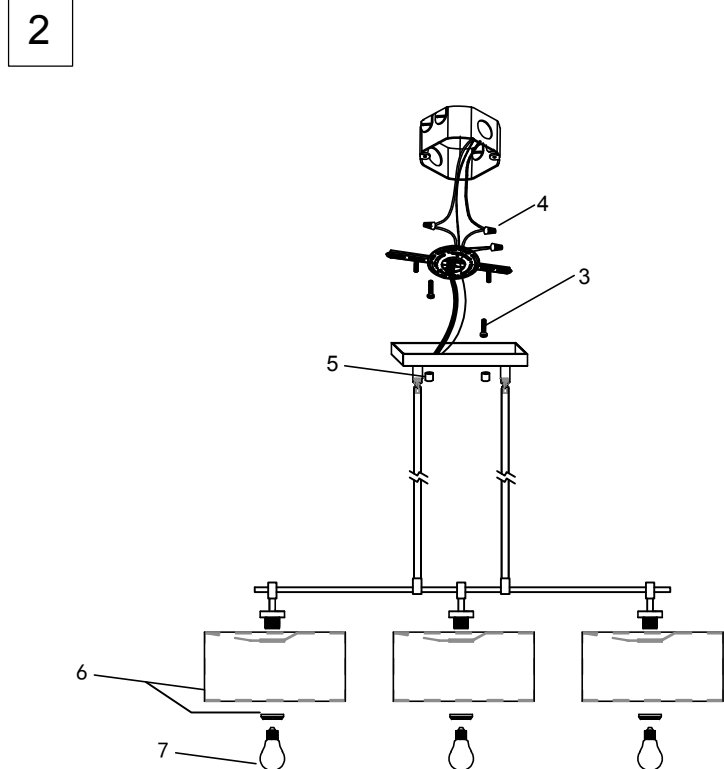


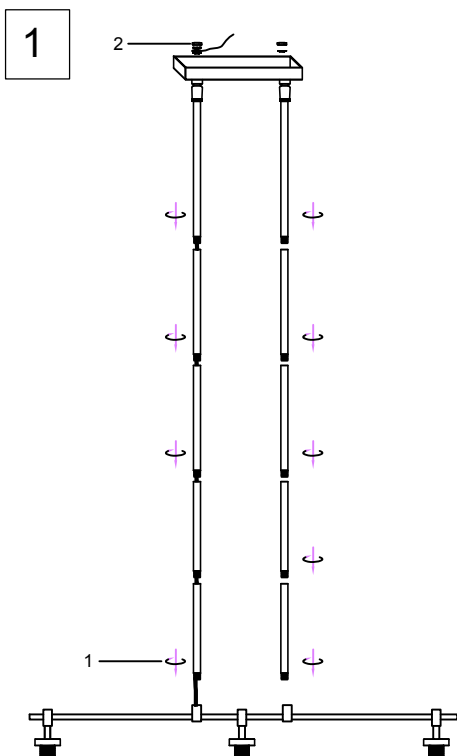

Installation steps:

- 1. Attach Downrod to Fixture Body:** Screw the downrod securely into the fixture body. The length of the downrod can be adjusted by connecting sections based on the ceiling height.
- 2. Secure Downrod to Canopy:** Use the provided nut, lock washer, and ground wire to secure the downrod to the canopy.
- 3. Install Mounting Bracket:** Attach the mounting bracket to the junction box using the mounting screws.
- 4. Connect Wires:** Pull the power supply wires from the junction box. Connect the wires using wire connectors as follows:
 - Connect the black (live) wire from the light fixture to the live (positive) wire from the power supply using a wire nut.
 - Connect the white (neutral) wire from the light fixture to the neutral (negative) wire from the power supply using a wire nut.
 - Connect the green ground wire from the fixture to the household ground wire.

* Ensure no bare wires are exposed to prevent electrical hazards.
 * Carefully tuck the wires back into the junction box.
- 5. Attach Canopy to Mounting Bracket:** Place the canopy over the mounting bracket, then secure it by tightening the decorative nuts.
- 6. Install Shade:** Place the center hole of the shade over the socket, then secure it by tightening the socket ring.
- 7. Install Bulb:** Install the light bulb (bulb not included).

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.