

STERLING®

A KOHLER COMPANY

WINDHAM™

HET-HIGH EFFICIENCY TOILET

403081
ALSO 403080



Features

- Vitreous china
- Sterling Pro Force® Technology
- 5-year limited warranty
- Flushes efficiently regardless of incoming water pressure
- Three-bolt, quick-connect installation system
- 12" (305 mm) rough-in
- 2" (51 mm) fully glazed trapway
- Less seat and supply
- 1.28 gpf (4.8 lpf) with one flush cleansing performance
- Large 8" (203 mm) x 9" (229 mm) water surface
- 27-1/4" (692 mm) x 15" (381 mm) x 29-1/2" (749 mm) [403080]
- 29-1/4" (743 mm) x 15" (381 mm) x 29-1/2" (749 mm) [403081]


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- EPA WaterSense®



Model 403080

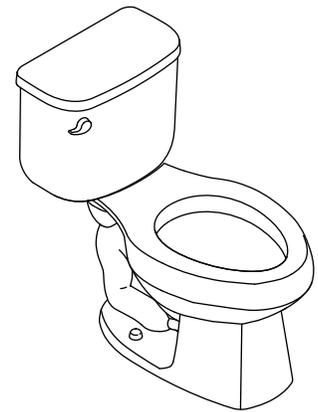

Model 403081

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Included Tank	Included Bowl	Colors/Finishes	
403080	HET-High Efficiency Toilet, with round-front bowl	404551	403015	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
403081	HET-High Efficiency Toilet, with elongated bowl	404551	403215	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information


Fixture:	
Configuration	Two-piece
Water per full flush	1.28 gpf (4.8 lpf)
Passageway	2" (51 mm)
Water area	8" (203 mm) x 9" (229 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	
Tank lid	1203861
Trip lever	84625
Bolt cap accessory pack	1013092

Installation Notes

Install this product according to the installation guide.

One flush cleansing of the bowl per ASME A112.19.2/CSA B45.1 and Dual Force® toilets per ASME A112.19.14-2006 performance requirements, when installed and operated per instructions packed with the product.

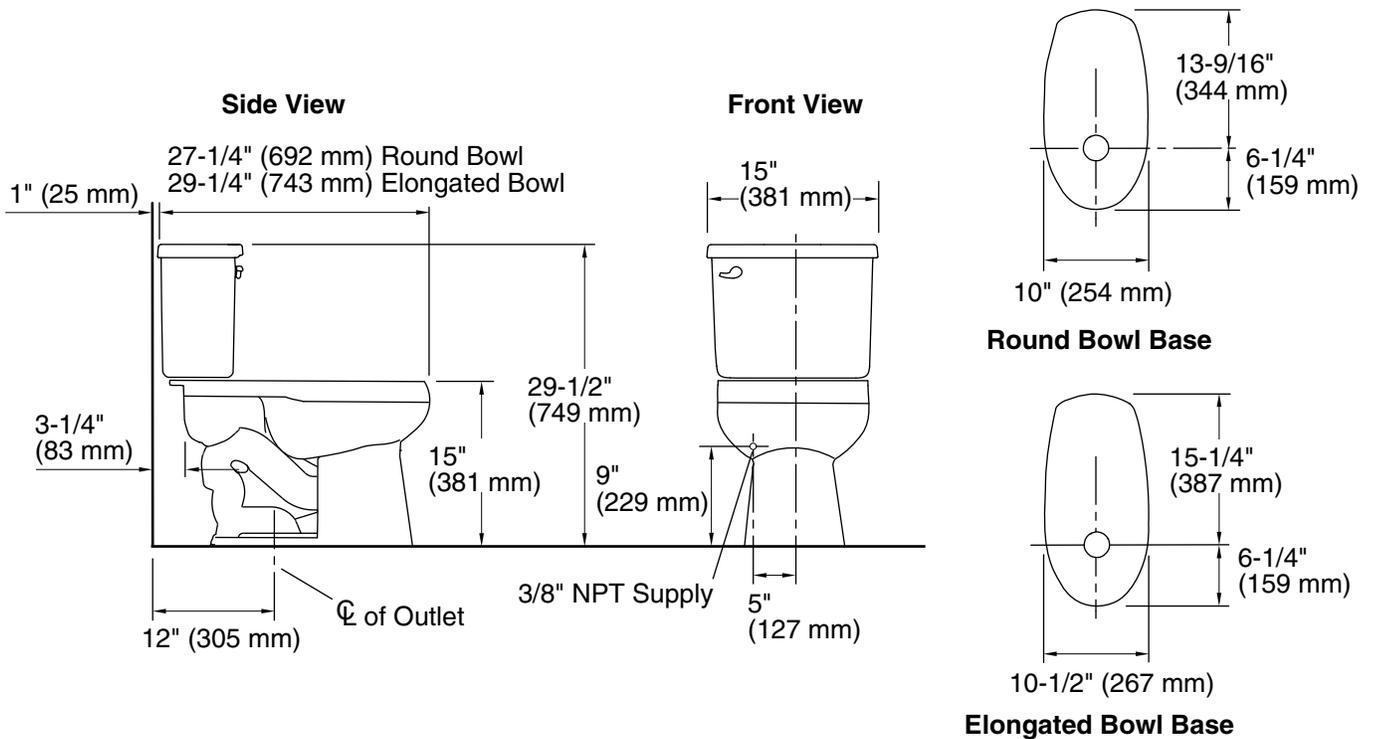

Product Diagram