

Assembly instructions

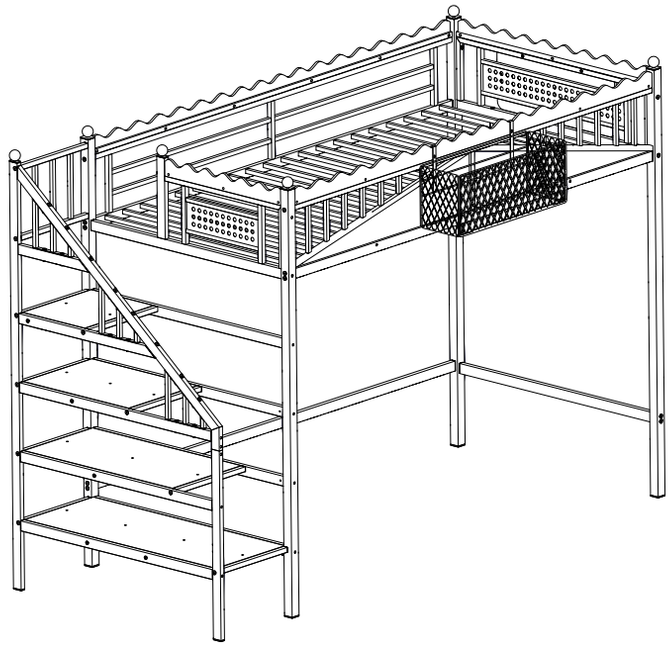

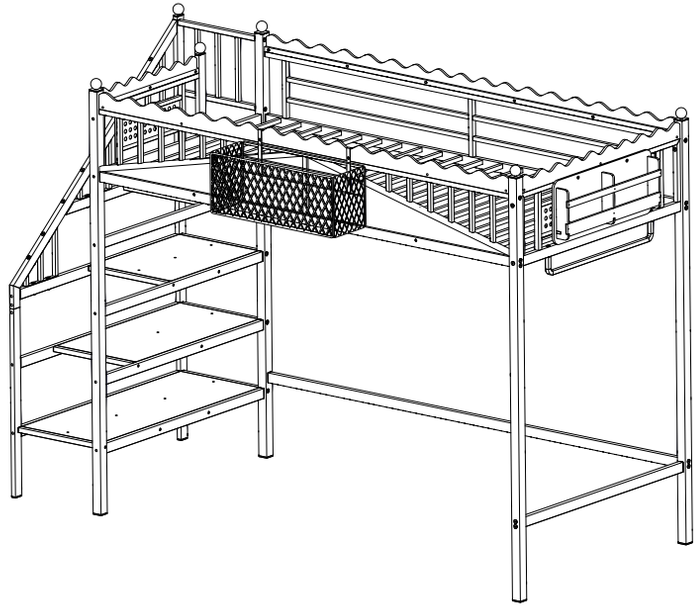

SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the waming label from the bed.
2. Always use the recommended size mattress on mattress support,or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.
The use of water or sleep flotation mattresses is prohibited.
13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed ; for example, but not limited to, hooks, belts and jump ropes.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.


Upper bed

Bed type	Length	Width	Thickness
Twin XL Standard	79" -80"	38 ½"	6" max

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.
19. Replacement Parts:

Replacement Parts, including additional guardrails, may be obtained from any of our dealers.


Component
distribution preview

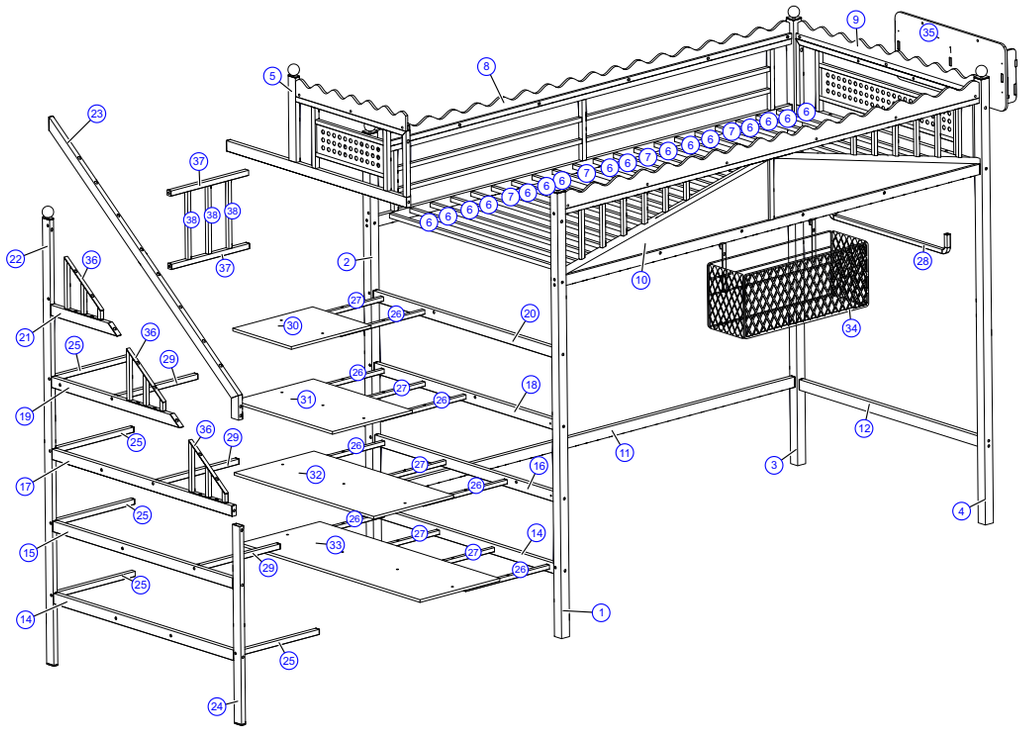


HARDWARE LIST

A	B	C	D	E	U	G
M8*55-55pcs	M8*35-25pcs	M8*30-8 pcs	ΦM8*16-15pcs	M6*15-18pcs	M6*25-2 pcs	ΦM6*10-32pcs
					H	F
					M6*20-12pcs	M8*15-14pcs
Q	S	N		Y	L	
40*40FQ-4pcs	M2.6*18-12pcs	20*40-2pcs		40*40M8-6pcs	M5*25-2pcs	
T		M	P		W	k
40*40F-4pcs	Z-1pcs	20*40-2pcs	18*60 -2pcs	O-16pcs	M4*25-2pcs	2pcs


List of components

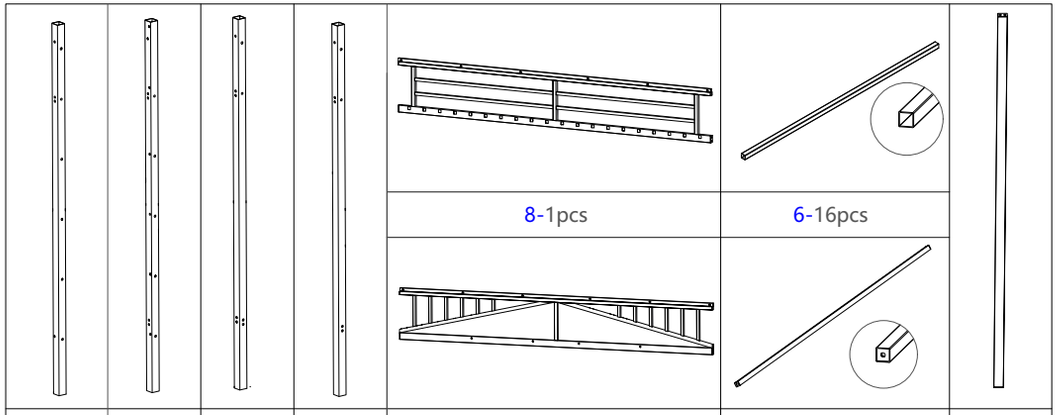

1-1pcs 2-1pcs 3-1pcs 4-1pcs 8-1pcs 6-16pcs 10-1pcs 7-4pcs 11-1pcs

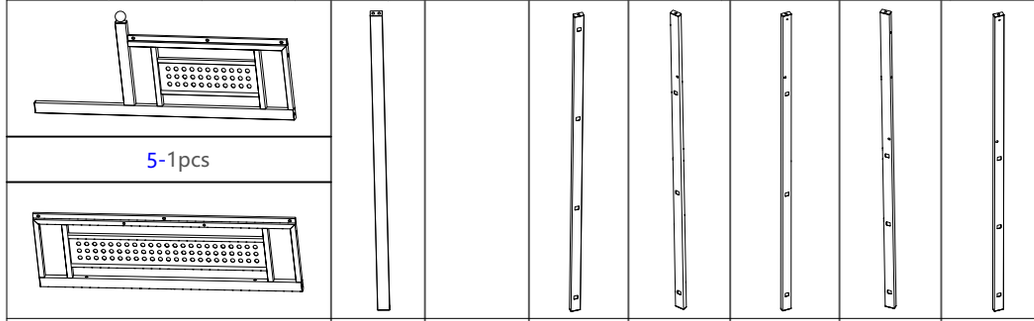



5-1pcs 9-1pcs 12-1pcs 14-2pcs 15-1pcs 16-1pcs 17-1pcs 18-1pcs

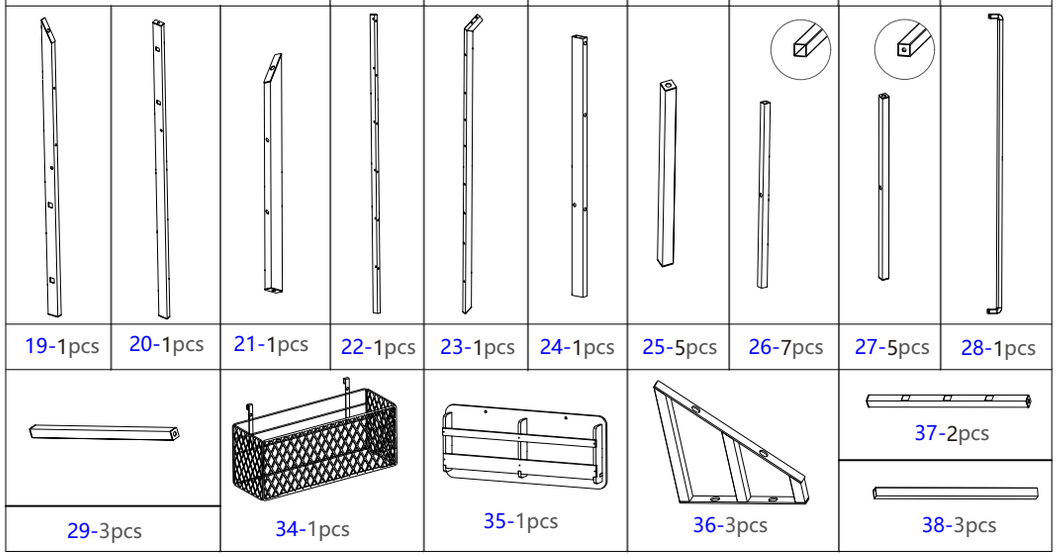


19-1pcs 20-1pcs 21-1pcs 22-1pcs 23-1pcs 24-1pcs 25-5pcs 26-7pcs 27-5pcs 28-1pcs 29-3pcs 34-1pcs 35-1pcs 36-3pcs 37-2pcs 38-3pcs

No. 34 Component List

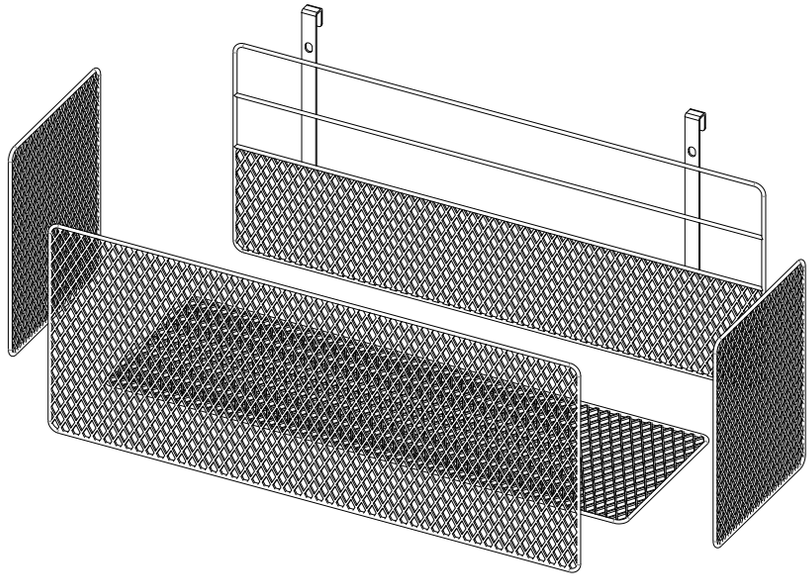


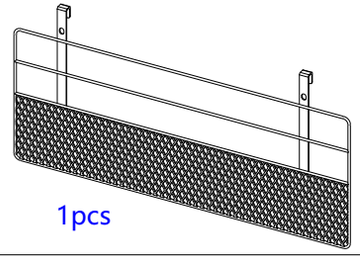


1pcs



1pcs





2pcs

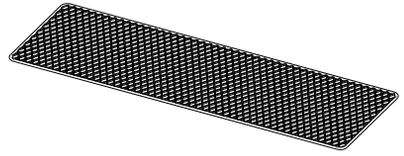

1pcs


Use a customized tie to bundle all the parts of the No. 34 component together, and use the tool to cut off the tail length of the tie.

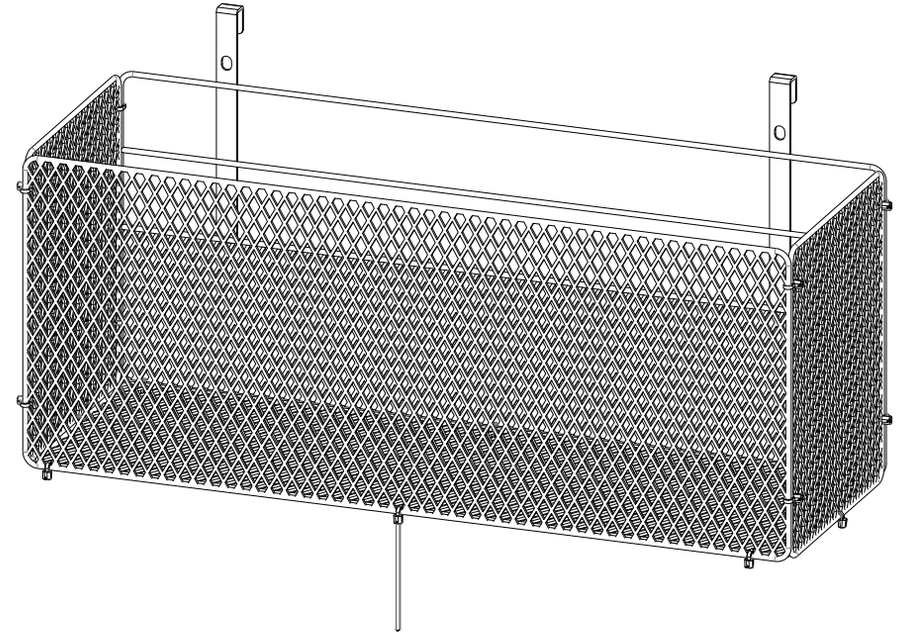





O-16pcs

No. 35 Component List

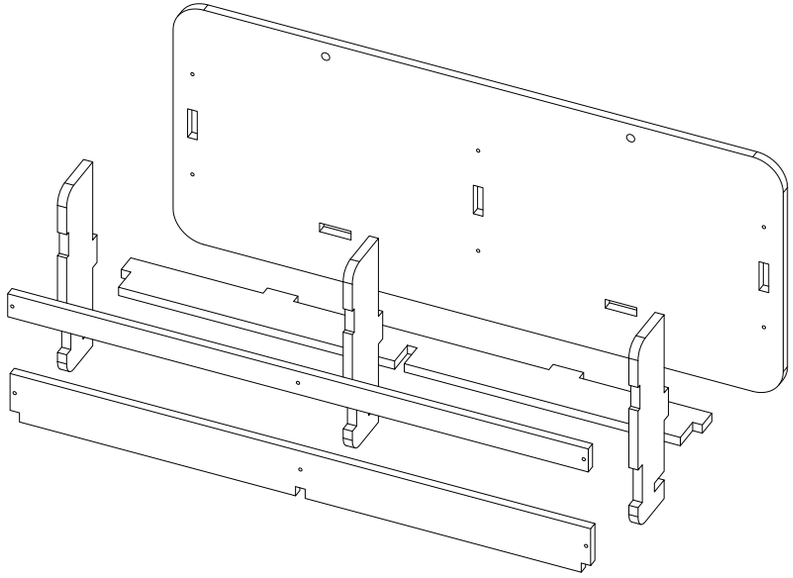


Use screw Z, S accessories to combine the parts required for the No. 35 component.

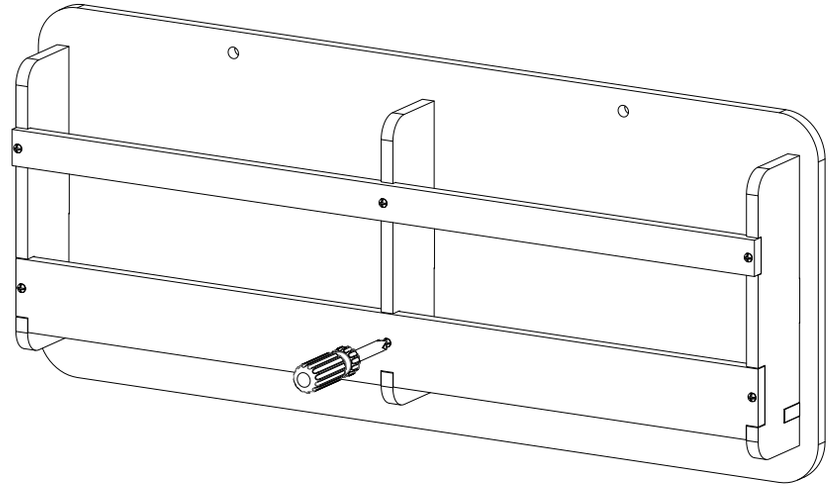





1pcs




1pcs



3pcs



1pcs




1pcs



S



M2.6*18-12pcs








Z

1pcs


Board list

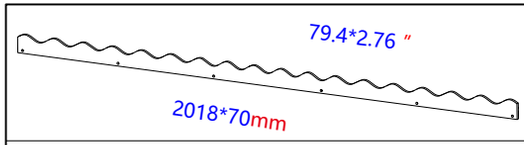
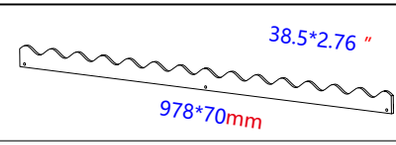
	
39-2pcs	40-1pcs

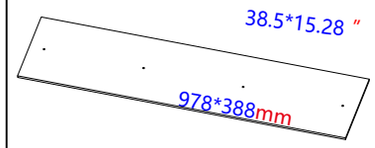		
41-1pcs	30-1pcs	31-1pcs
		
32-1pcs	33-1pcs	


A total of 8 pcs



Step 1: Use hardware E, G, L to connect #8 and #39 together. Get 8# components

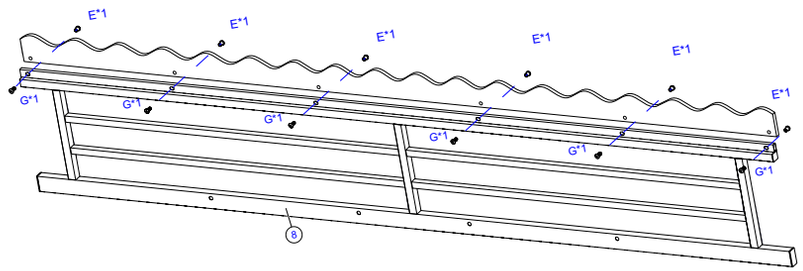


				
8-1pcs	39-1pcs	E M6*15-6pcs	G ΦM6*10-6pcs	L

Step 2: Use hardware A, T, Q , Y to connect #2 #3 #11and #8 components together.


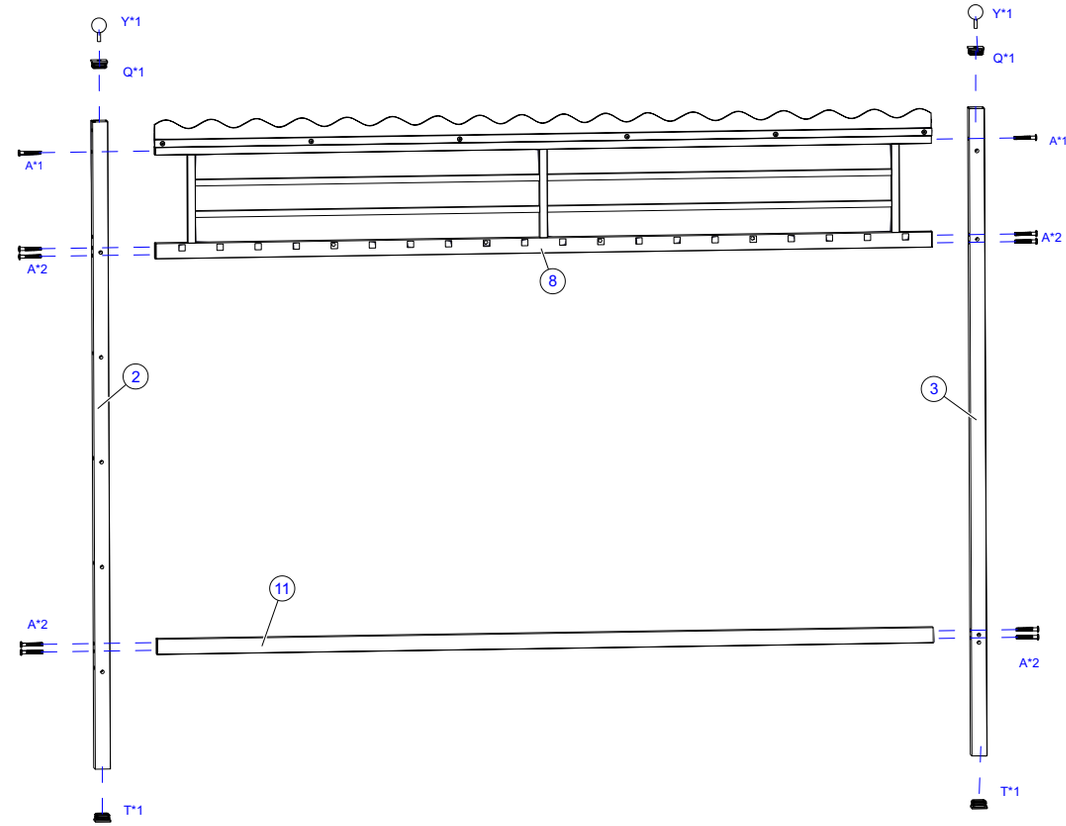


			 T	 Y
2-1 pcs	3-1 pcs	1pcs 8 #components	40*40F-2pcs	20*40-2pcs
		11-1pcs	 Q 40*40FQ-2pcs	 A M8*55-10pcs


Step 3: Use hardware E, G , L to connect #10 #34 and #39 together.
Get #10 components


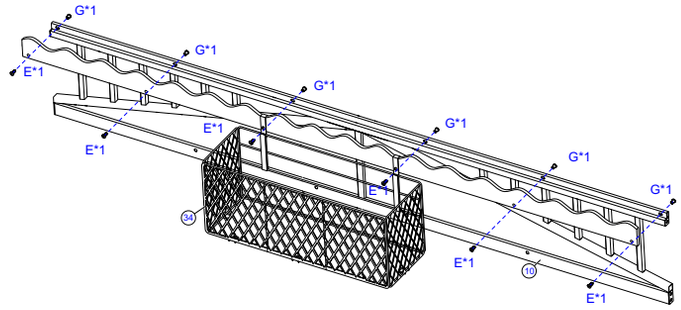


W


	 79.4*2.76 〃 2018*70mm		 E	 G
10-1pcs	39-1pcs	34-1pcs	M6*15-6pcs	ΦM6*10-6 pcs

Step 4: Use hardware A, L, T, Q , Y to connect #1 #4 and #10 components together.



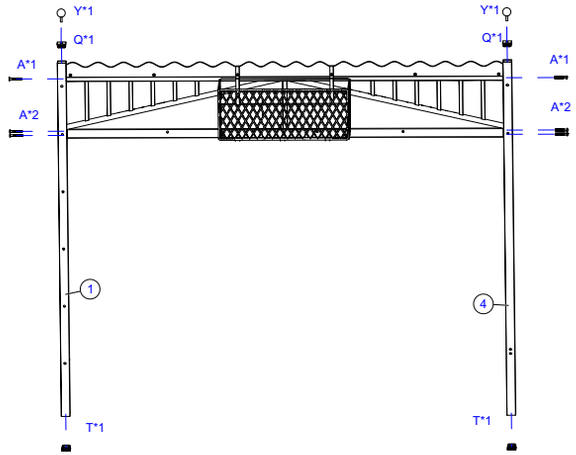


		 Q	 A
1-1 pcs	1 pcs #10 components	40*40FQ-2pcs	M8*55-6pcs
	 T	 Y	 L
4-1 pcs	40*40F-2pcs	20*40-2pcs	


Step 5: Use hardware E, G, W, M , Y to connect #5 #41 together.

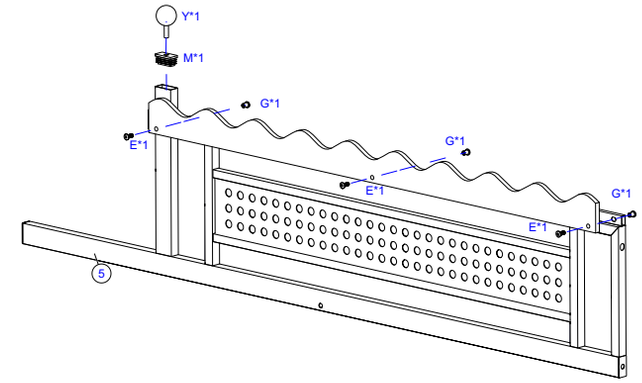



W

	 23.5*2.76 〃 598*70mm	 M	 Y	 E	 G
5-1pcs	41-1pcs	20*40-1pcs	40*40-1pcs	M6*15-3pcs	ΦM6*10-3pcs


Step 6: Use hardware E, G, W to connect #9 #40 together.

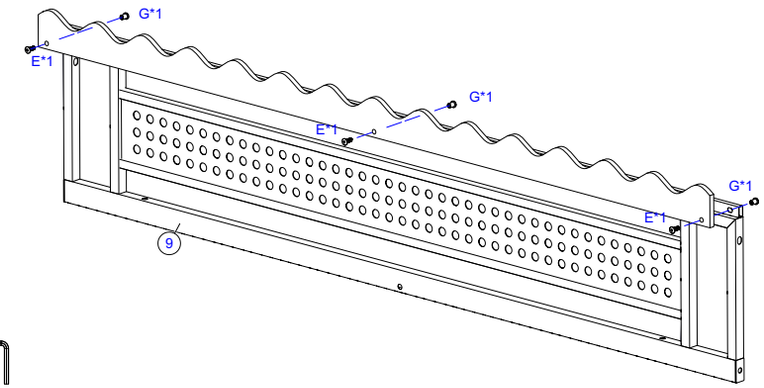

W


	 38.5*2.76 〃 978*70mm	 E	 G
9-1pcs	40-1pcs	M6*15-3pcs	ΦM6*10-3pcs



Step 7 : Use hardware A, L to connect #12 #14 together.

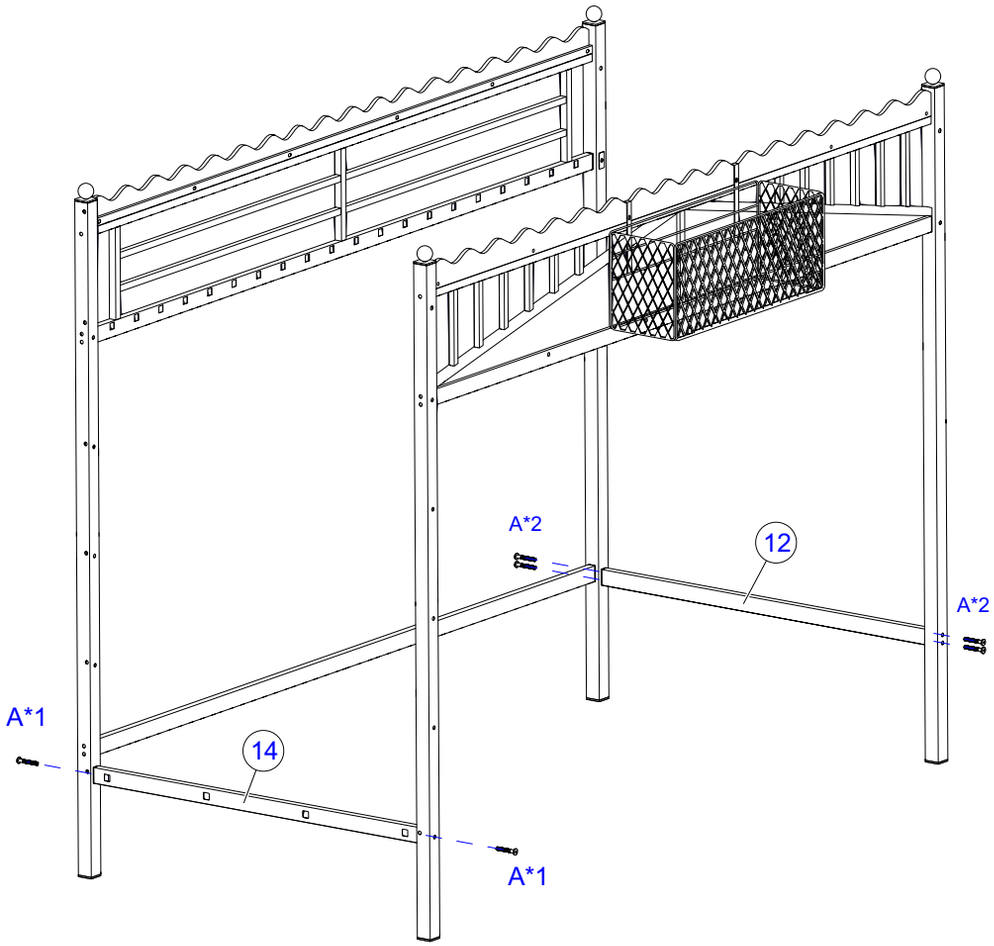


			
12-1pcs	14-1pcs	A M8*55-6pcs	L

Step 8:Use #6 and #7 to insert into the corresponding square hole of #8 #10 and use hardware C, L to connect #7,#8,#10 together.

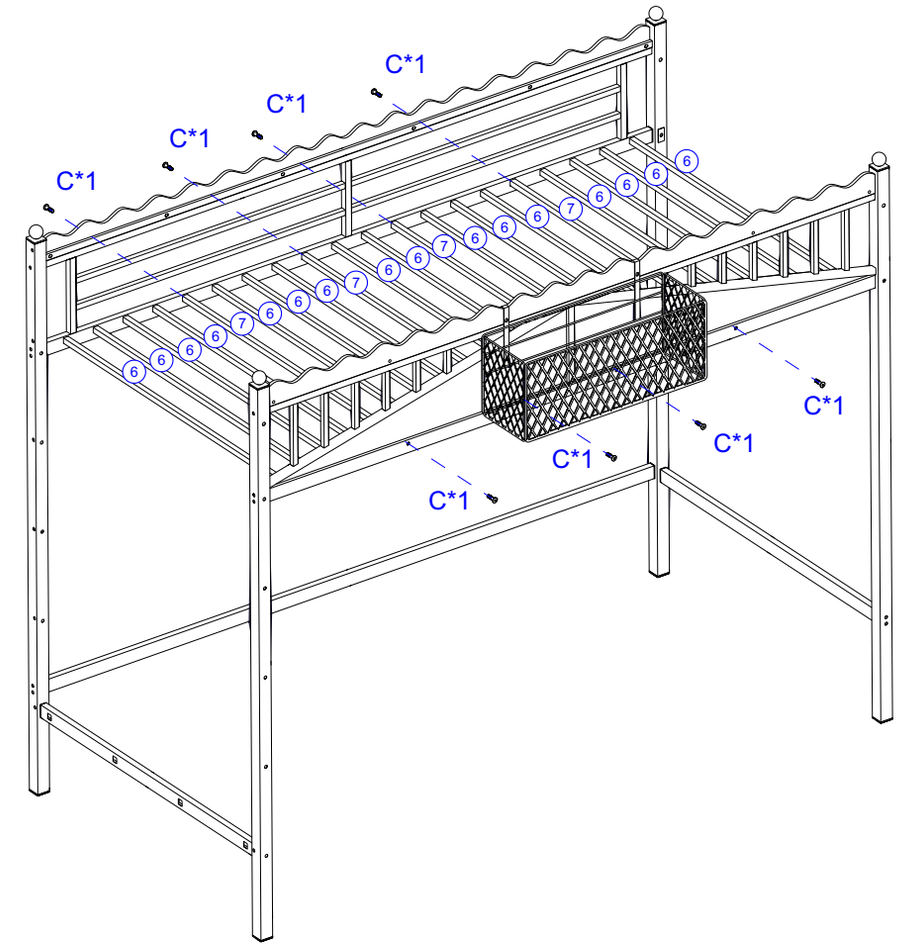



			
6-16pcs	7-4pcs	C M8*30-8 pcs	L

Step 9:Use hardware A,D L to connect #5,#9 together.

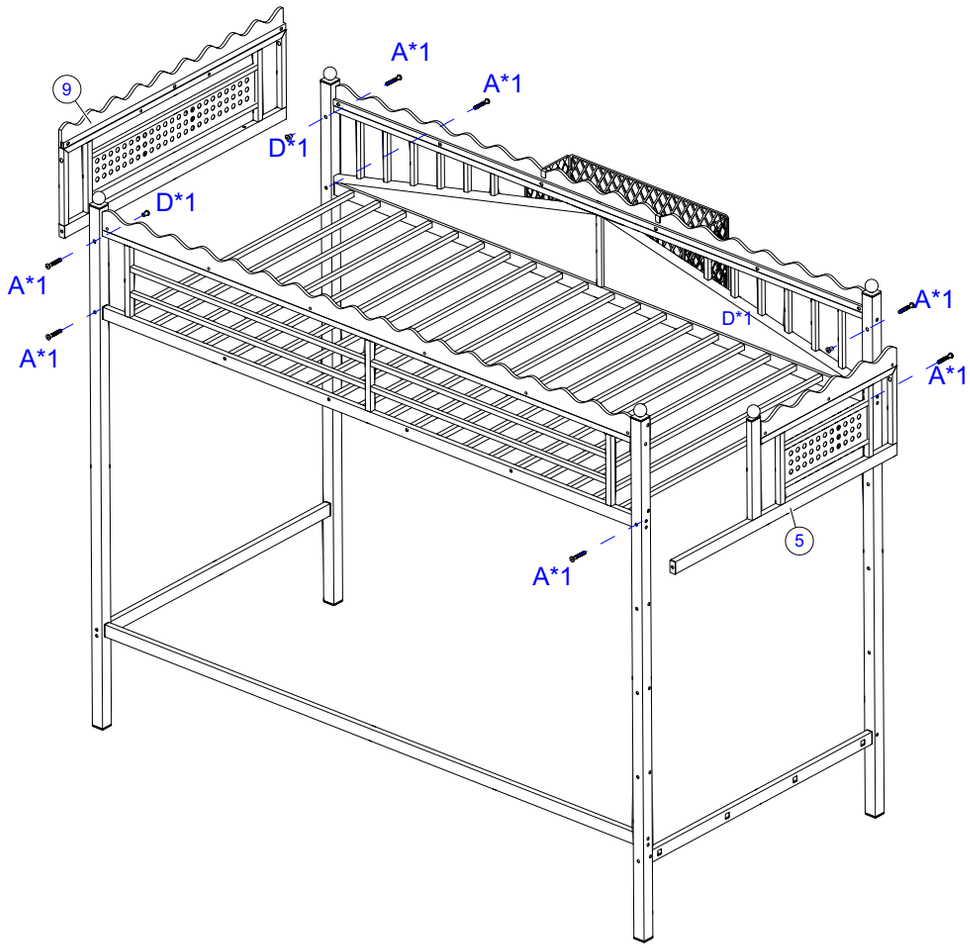




L


			
5-1pcs	9-1pcs	A M8*55-7pcs	D ΦM8*16-3pcs

Step 10:Use hardware A,L to connect #16,#18, #20 together.

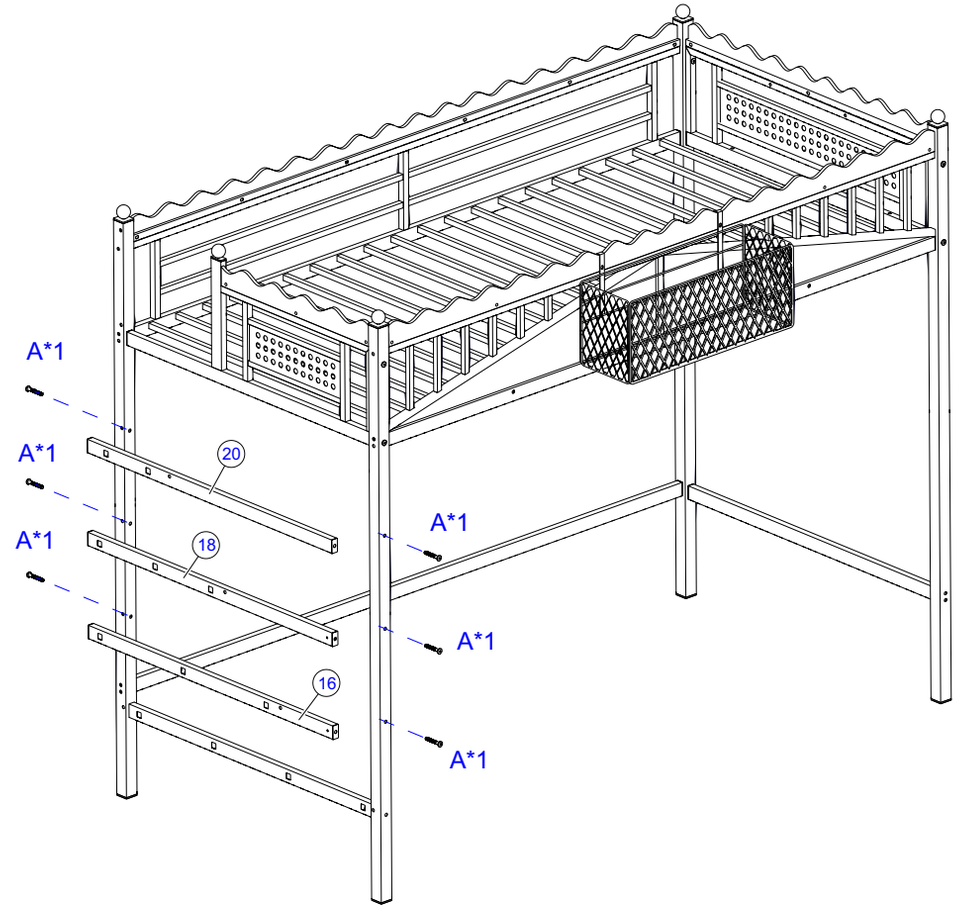




L

			
16-1pcs	18-1pcs	20-1pcs	A M8*55-6pcs


Step 11:Use hardware A,B,L to connect #22,#25,#37,#38 together.

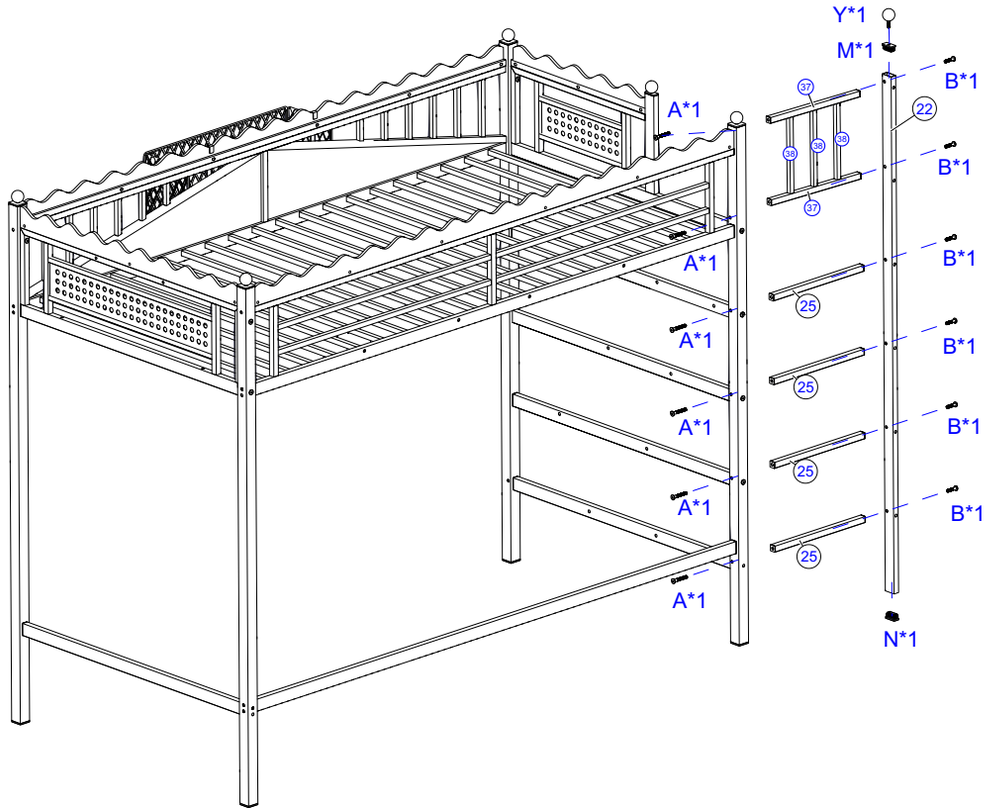

L


22-1 pcs	M 20*40-1pcs	A M8*55-6pcs	B M8*35-6pcs
25- 4pcs	N 20*40-1pcs	Y 20*40-1pcs	37-2pcs
			38-3pcs

Step 12:Use hardware F,P,N,L to connect #23,#24 together.

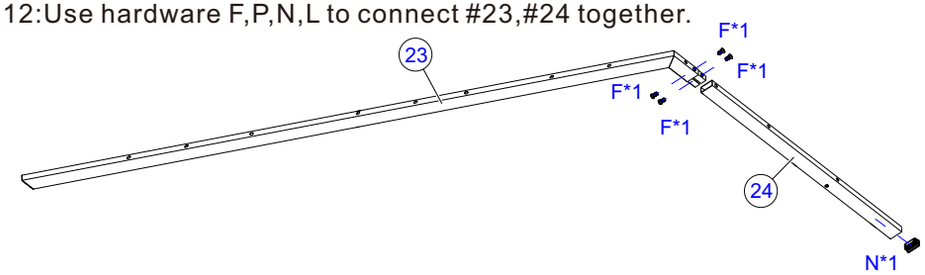


23-1pcs	24-1pcs	P 18*60 -2pcs	N 20*40-1pcs	F M8*15-4pcs

Step 13:Use hardware A,B,F,H,G to connect #14,#25,#26,#27,#33 together.

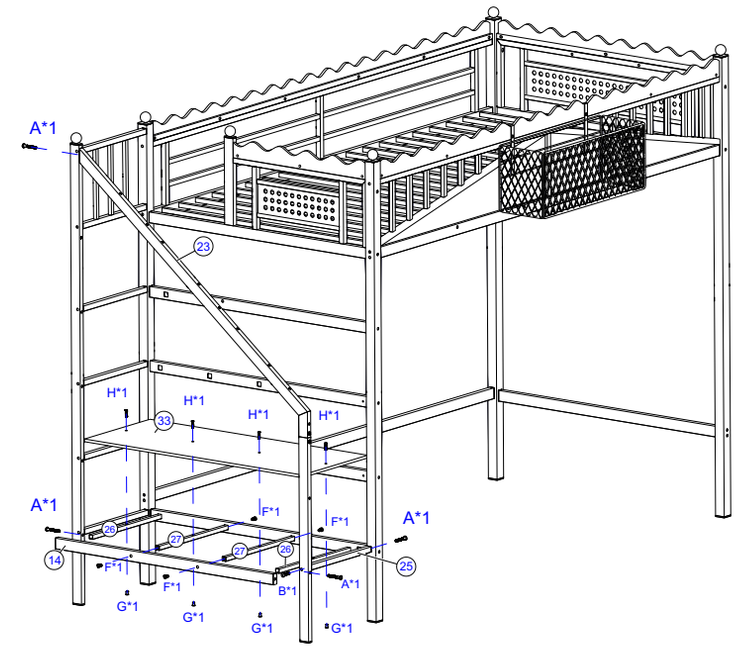


38.5*15.28" 978*388mm 33-1 pcs	26- 2pcs	14-1 pcs	B M8*35-1pcs	F M8*15-4pcs
25- 1pcs	27- 2pcs	A M8*55-4pcs	H M6*20-4 pcs	G ΦM6*10-4 pcs

Step 14:Use hardware A,B,F,H,G to connect #15,#26,#27,#29 #32 together.

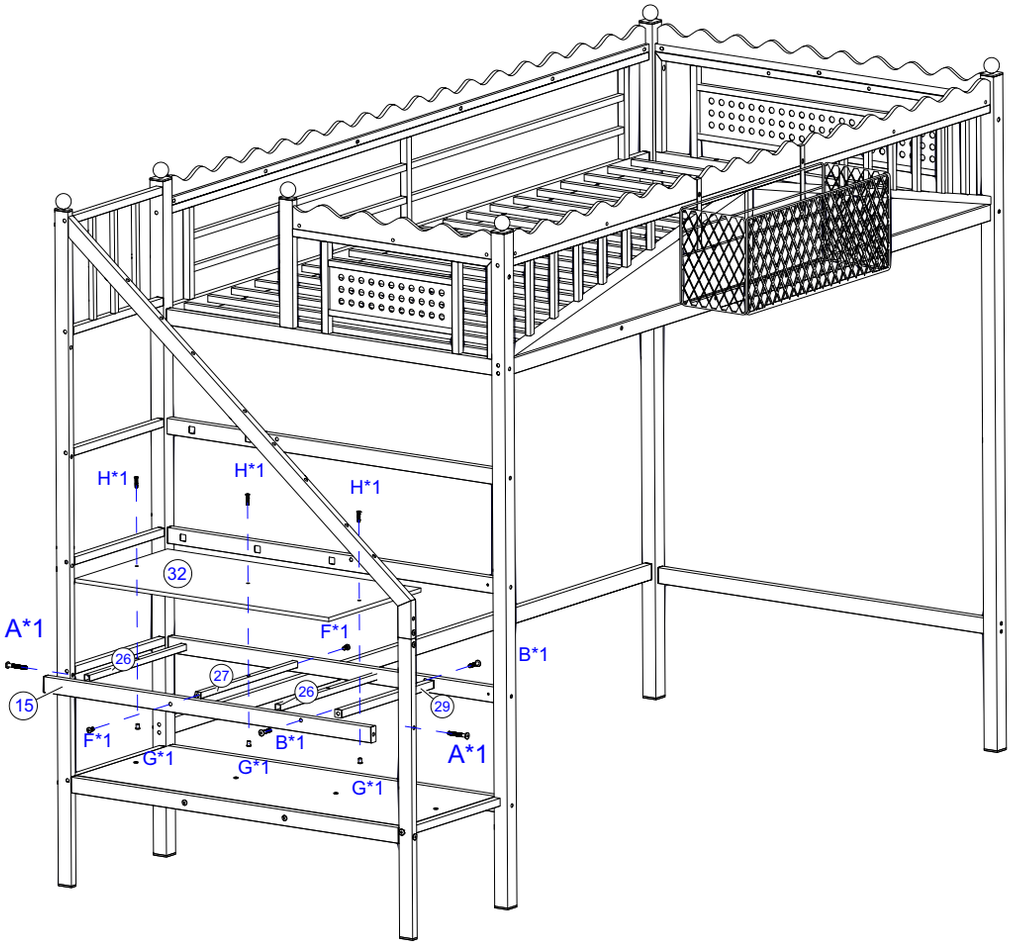


29.84*15.28" 758*388mm 32-1 pcs	26- 2pcs	15-1 pcs	B M8*35-2 pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2 pcs	H M6*20-3 pcs	G ΦM6*10-3 pcs

Step 15:Use hardware A,B,F,H,G to connect #17,#26,#27,#29 #31 together.

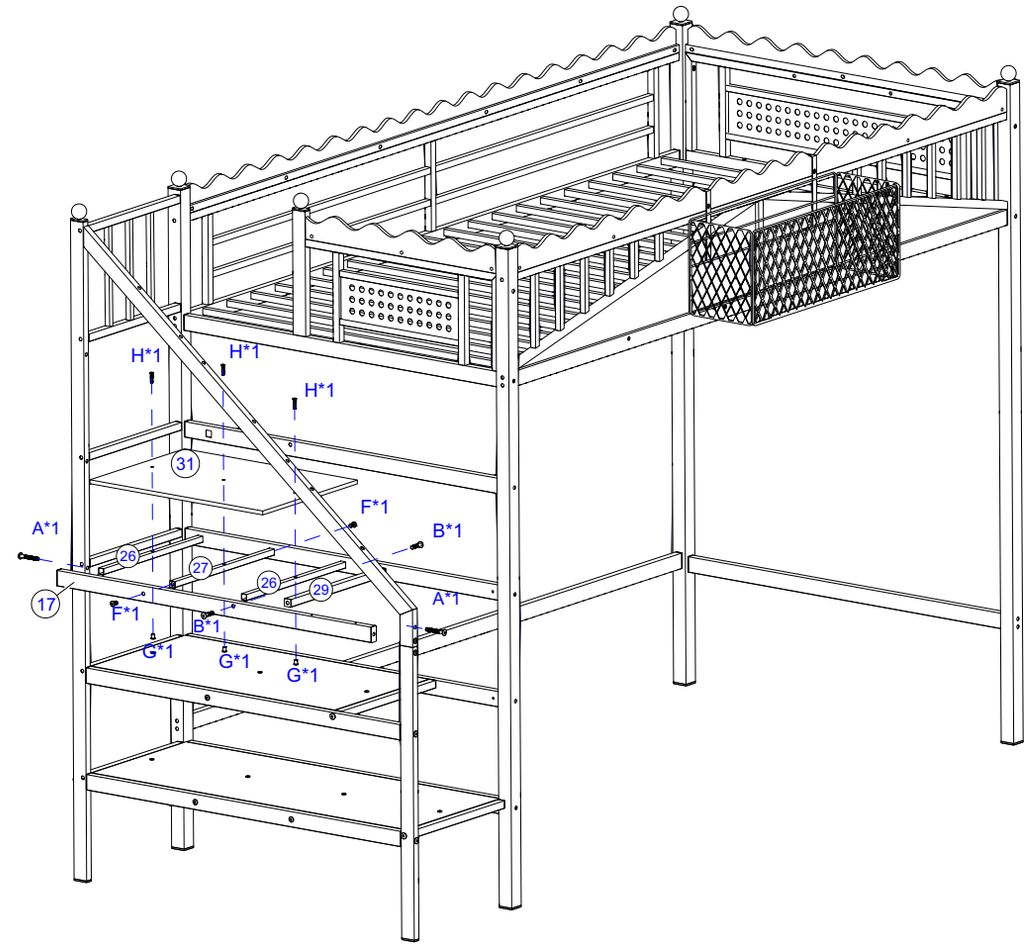


21.18*15.28" 538*388mm 31-1 pcs	26- 2pcs	17-1 pcs	B M8*35-2 pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2 pcs	H M6*20-3 pcs	G ΦM6*10-3 pcs

Step 16:Use hardware A,B,F,H,G to connect #19,#26,#27,#29,#30 together.

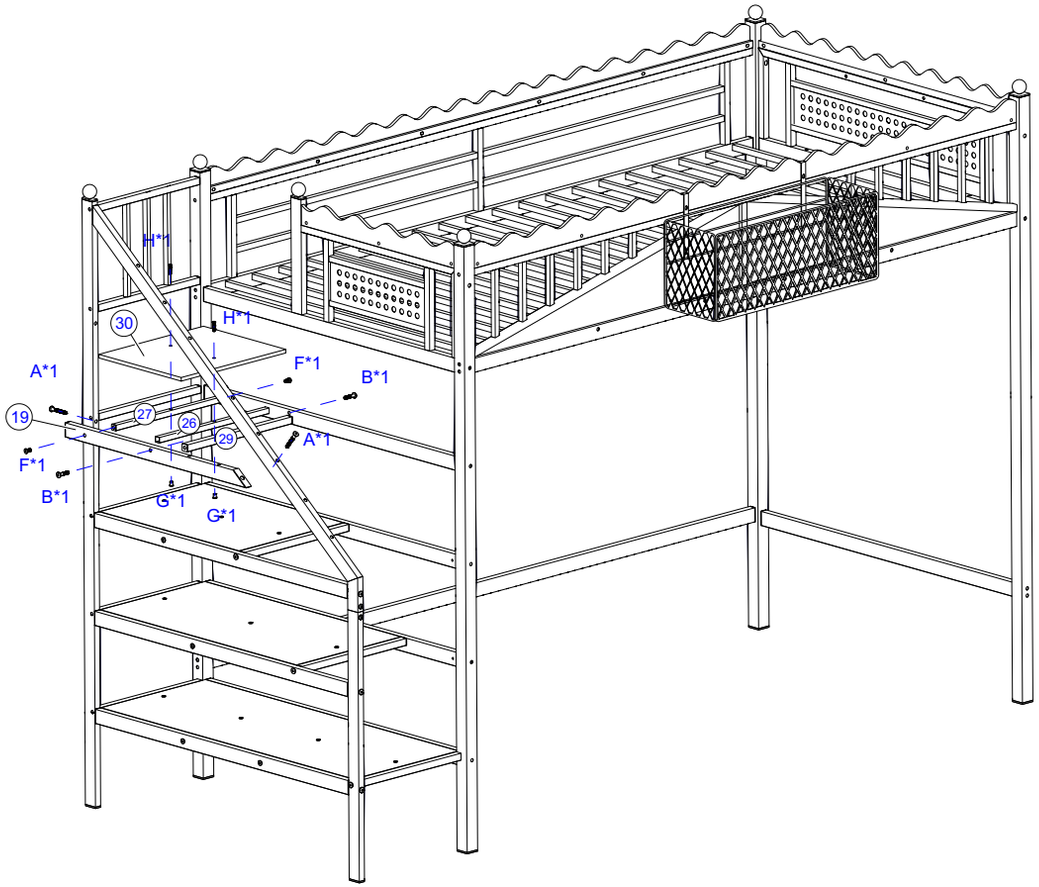


12.5*15.28" 318*388mm 30-1 pcs	26- 1pcs	19-1 pcs	B M8*35-2pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2pcs	H M6*20-2 pcs	G ΦM6*10-2 pcs


Step 17:Use hardware A,L,to connect #21 together.

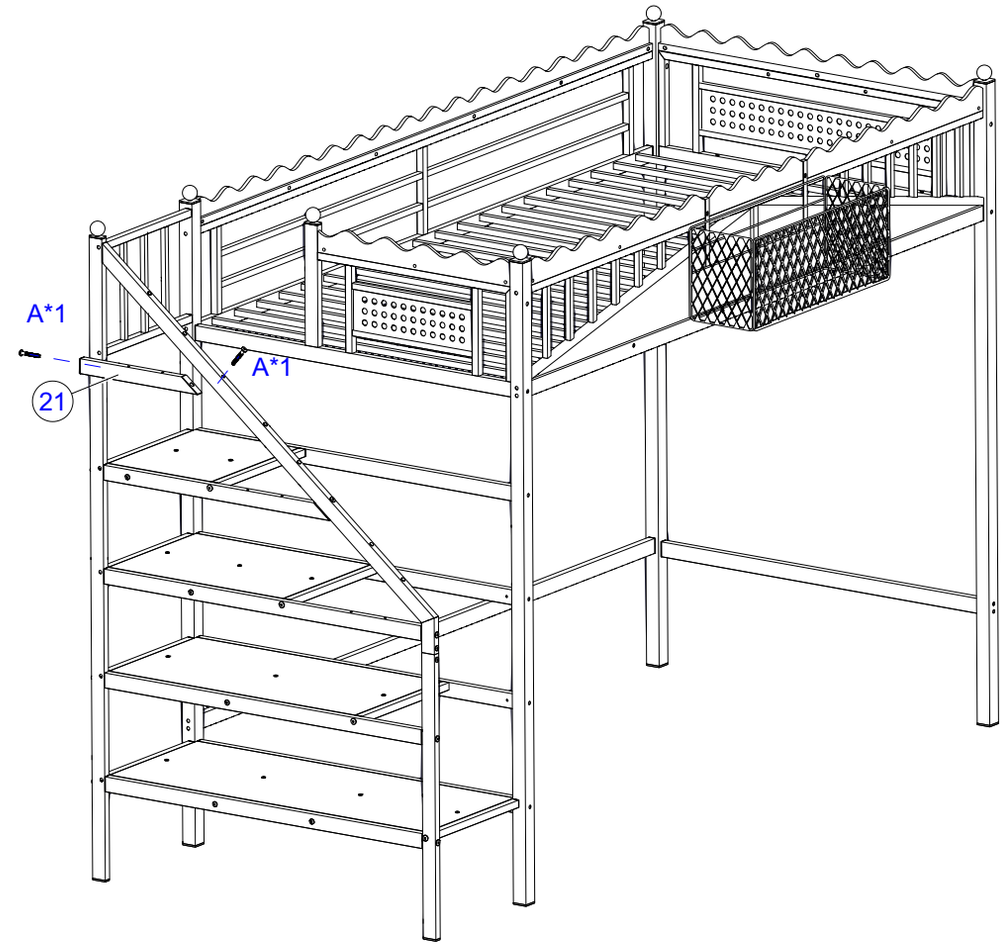


21-1pcs	A M8*55-2pcs	L	


Step 18:Use hardware B,D,L to connect #36 together.

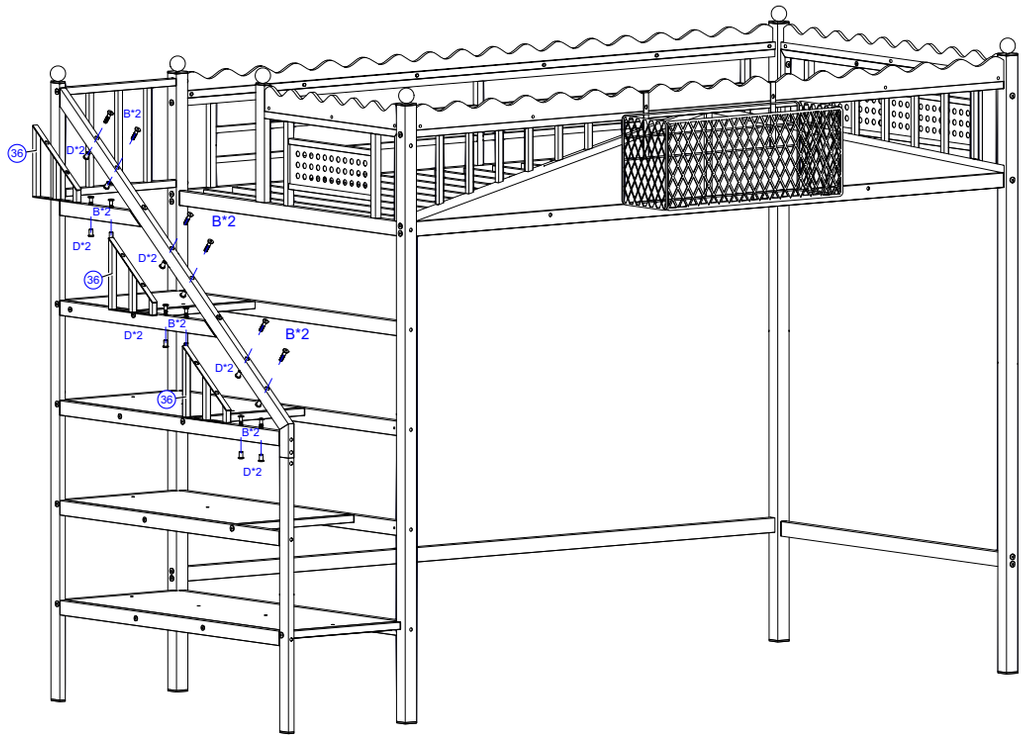

 36-3pcs	 B M8*35-12pcs	 D ΦM8*16-12 pcs	 L


Step 19:Use hardware A,U,G to connect #28,#35 together.

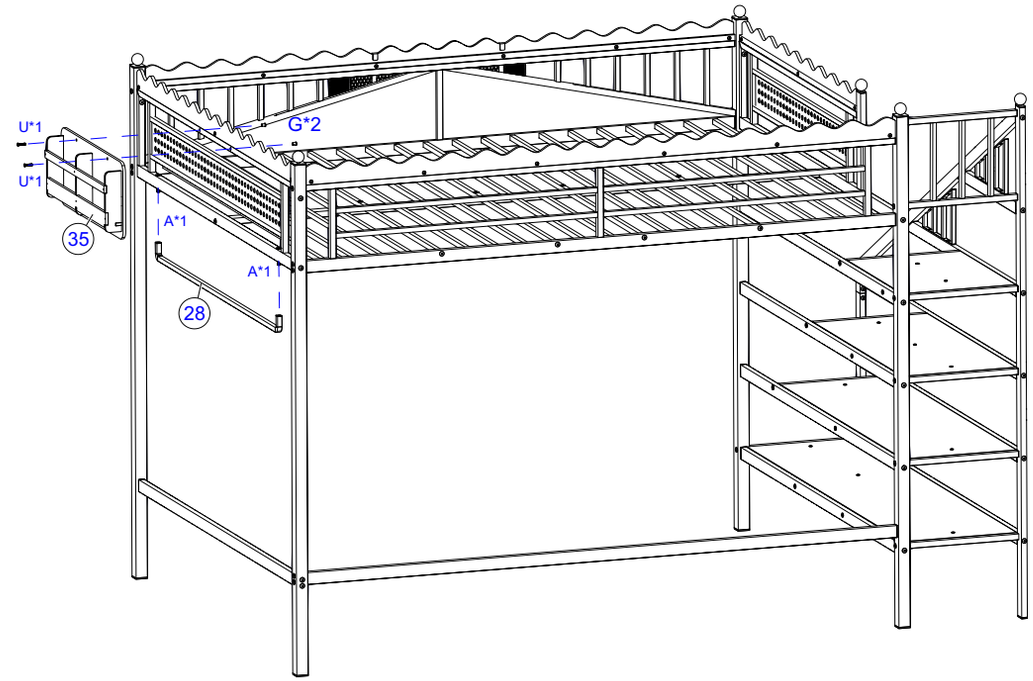


 35-1pcs	28-1pcs	 A M8*55-2pcs	 G ΦM6*10-2pcs	 U M6*25-2pcs

Completed attic bed

Fix the wall, prevent movement,
selective installation



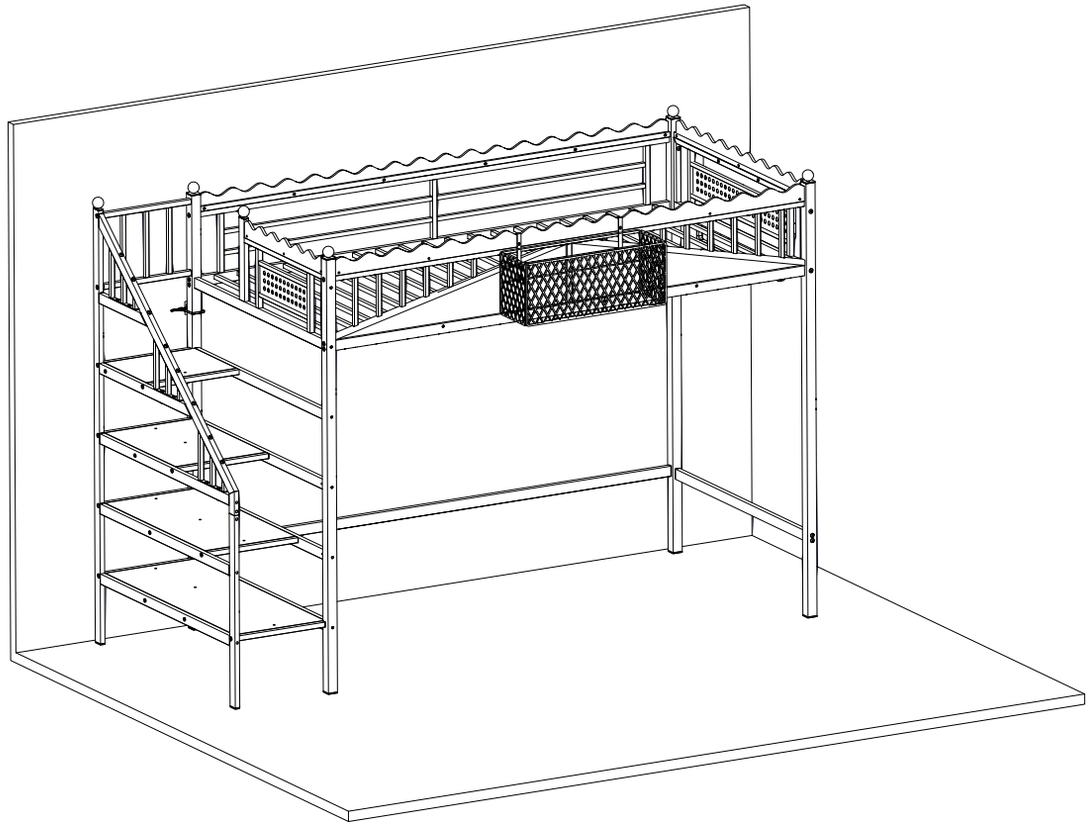

Note: Tighten all the steps before use,
thank you.

Recyclable garbage