

## One-light Pendant

Ceiling cord mounted • Damp location listed



### Description:

A distinctive classic globe pendant is accented by a striking metal brushed nickel cap. The cap holds a beautiful opal glass shade ready to emit gentle illumination. This versatile pendant can be displayed as a single fixture or in groups of two or more to create a custom lighting design for your home.

### Specifications:

- Brushed Nickel (-009) (Plated)
- Steel Construction
- Opal Glass Globe
- The cap holds a beautiful opal glass shade ready to emit gentle illumination.
- A distinctive classic globe pendant is accented by a striking metal brushed nickel cap.
- This versatile pendant can be displayed as a single fixture or in groups of two or more to create a custom lighting design for your home.
- Ideal for any foyer, kitchen, or dining room.
- Perfect for mid-century modern, transitional, modern, or contemporary settings.
- Measures 11-5/8-inch width by 13-1/2-inch height.
- Uses one LED bulb that is included (17w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting 1/8 IP Mounting Plate for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

### Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1276/73 (LM-82)
Lumens/LPW (Delivered)	/
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Max. Operating Temp	
Warranty	5-year limited warranty
Labels	cCSAus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

**P500148-009-30**

### Images:



### Dimensions:

Diameter: Height: 13-1/2"  
Overall Ht. W/Cord: 136-1/2"

Width: 11-5/8"  
Height: 10-1/2"

# One-light Pendant

Ceiling cord mounted • Damp location listed



## Photometrics:

**P500148-009-30**

### ELECTRICAL DATA P500148-009-30

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	17
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to
Dimming	Yes*

\*See Dimming Notes for more information

### P500148-009-30


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 415

Fixture Efficacy: 44.6

Spacing Criteria:

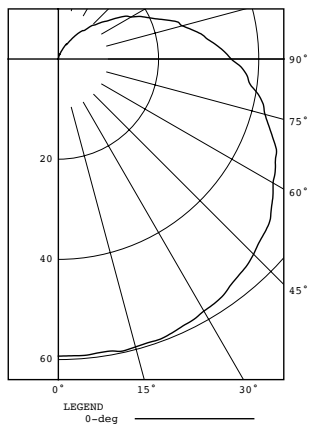

Test 18.00160 Test Date 02/14/18

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	59.3	
5	59.4	6
15	59.5	17
25	58.8	27
35	57.5	36
45	55.1	43
55	51.9	47
65	47.8	47
75	42.7	45
85	37.8	41
90	34.5	
95	31.7	35
105	25.6	27
115	19.6	20
125	14.3	13
135	9.4	7
145	5.4	3
155	2.5	1
165	0.9	0
175	0.0	0
180	0.0	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	50	12.0
0-40	86	20.7
0-60	175	42.1
0-90	309	74.4
90-120	82	19.6
90-130	94	22.7
90-150	105	25.3
90-180	106	25.6
0-180	415	100.0

## One-light Pendant

Ceiling cord mounted • Damp location listed



**P500148-009-30**

### Dimming Notes:

---

P500148 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.