

80107Product Installation Instructions




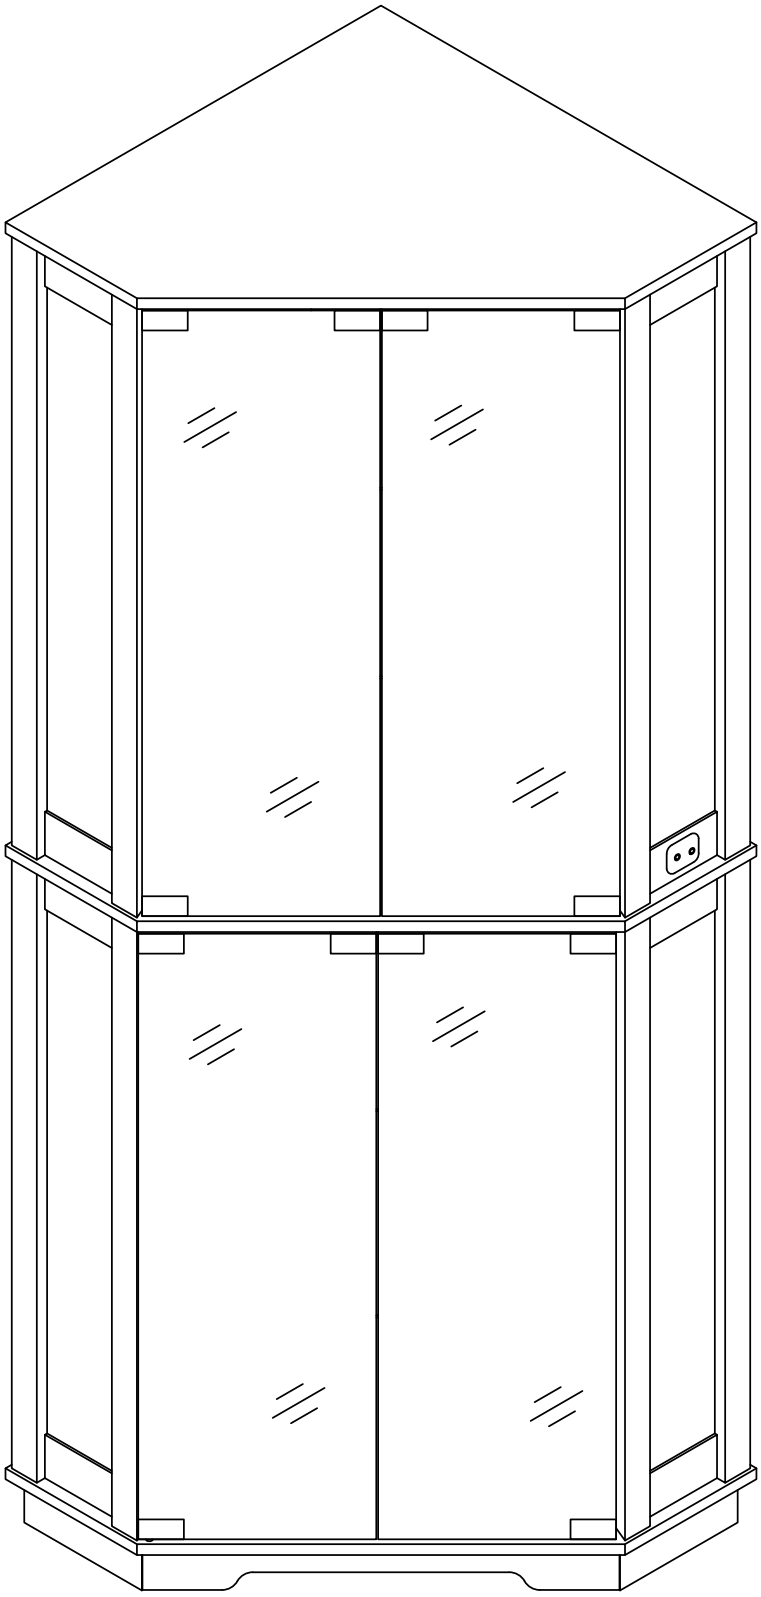


1x1

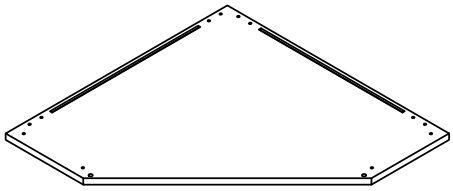


2x1




3x1




4x1



5x1




6x1




7x2




8x6




9x2




10x2




11x3




12x1

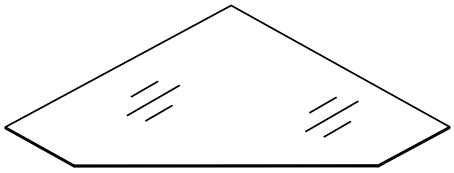


13x4

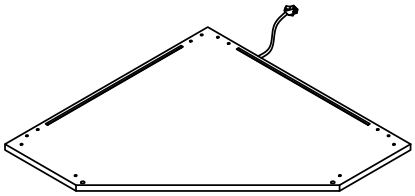

14x1

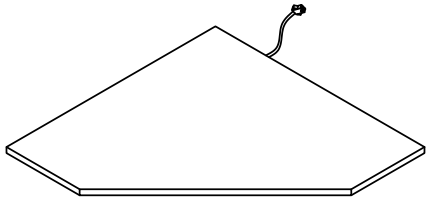










15x1




16x4




1

A		Two In One Screw (6x28mm)	85pcs +4pcs
B		Two In One Nut (10x12mm)	85pcs +4pcs
C		Non-slip pads (50x10x2mm)	10pcs +2pcs
D		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Iron sheet	4pcs
		Hinge	8pcs 4pcs 4pcs
E		Wire clamp	2pcs +1pcs
F		Fixing clip & screw (3x16mm)	16pcs +2pcs
G		Laminate support nail	24pcs +4pcs
H	Anti tipping hardware  x2  (3.5x14mm) x2  x4  (4x45mm) x2  x2		
		AC/DC Adapter (12V⎓2.0A)	1pcs

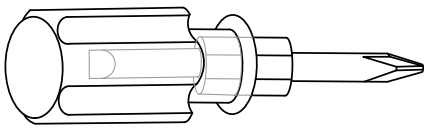


1pcs

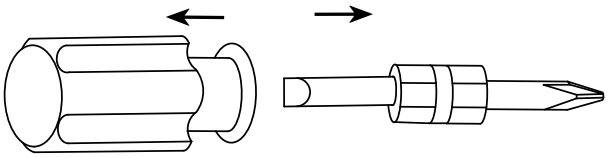


Double-head screwdriver, use as required

Product structure decomposition

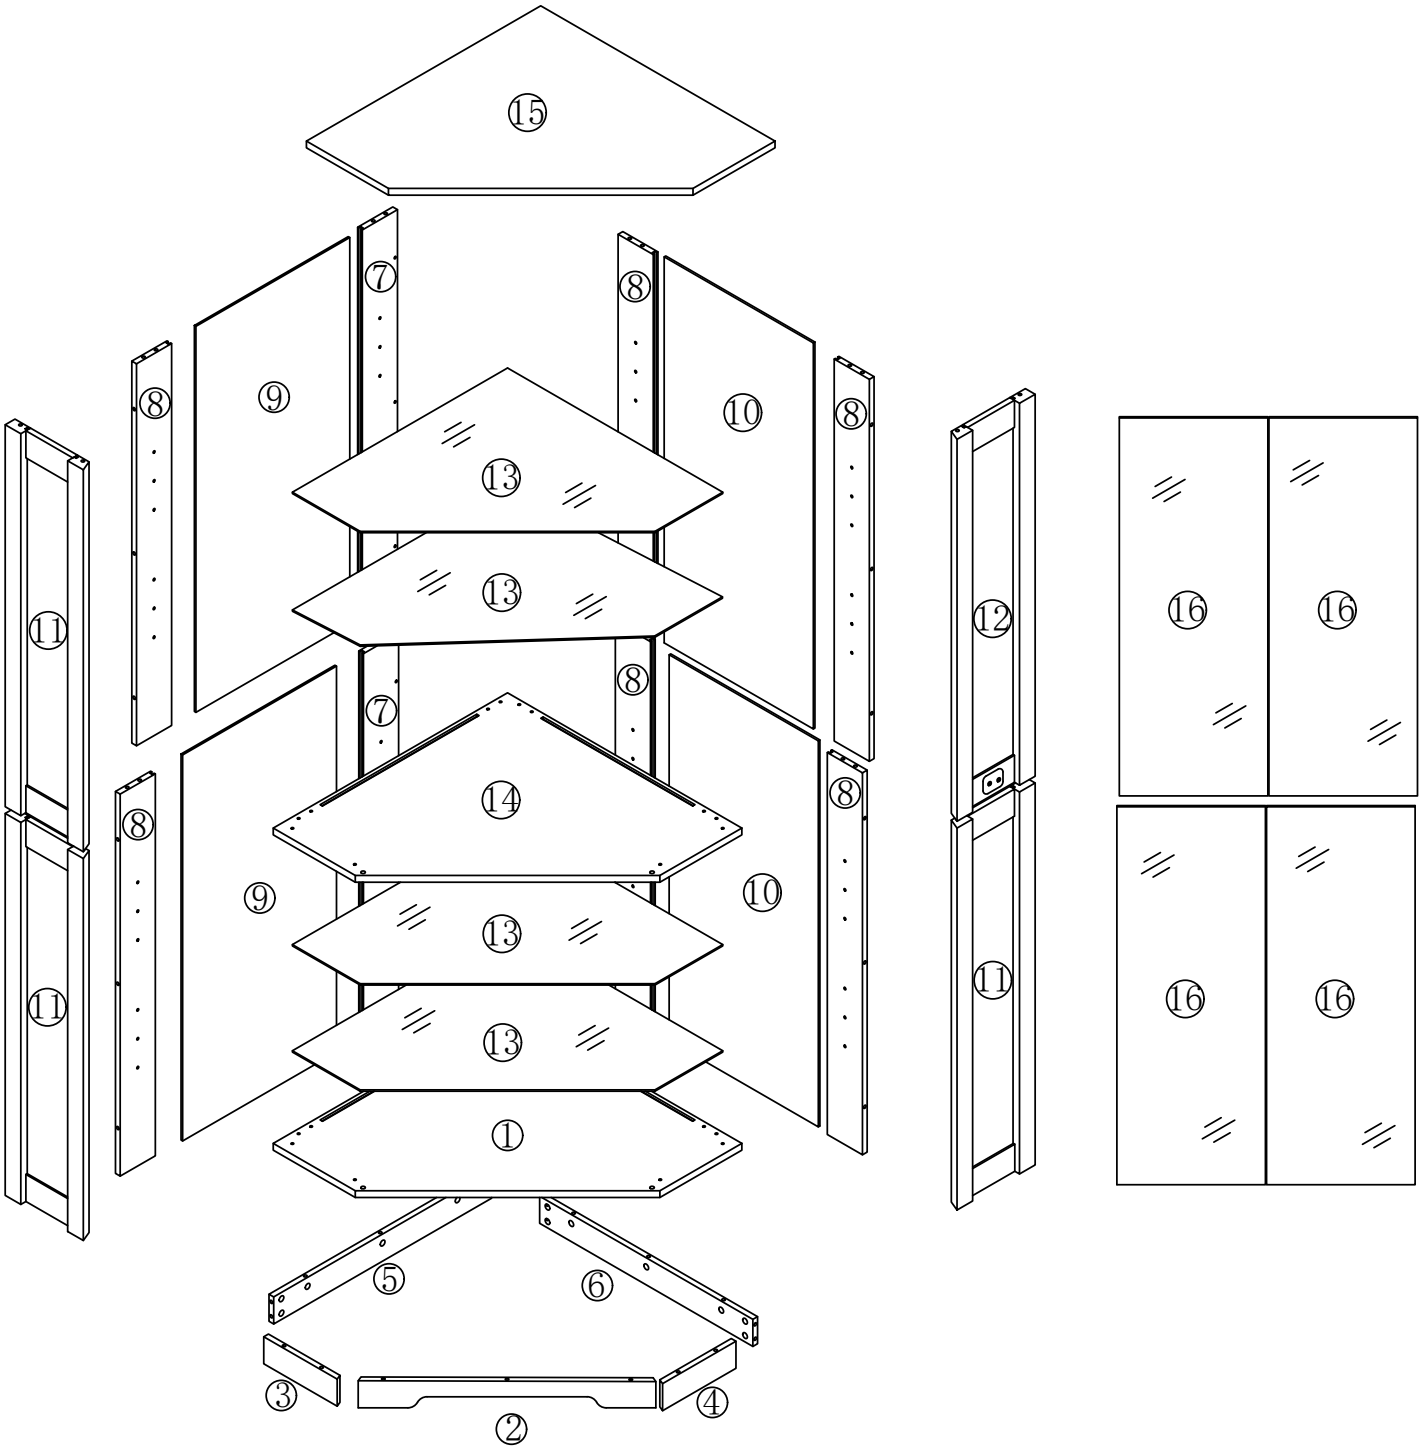


Use parts A and B


Step1

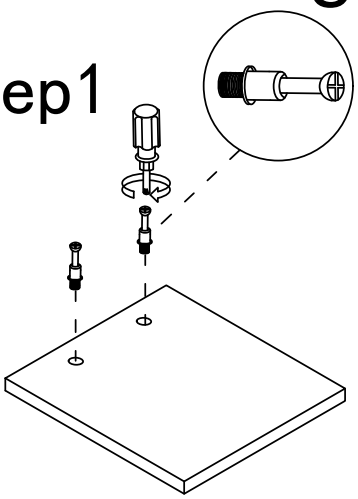


Step2

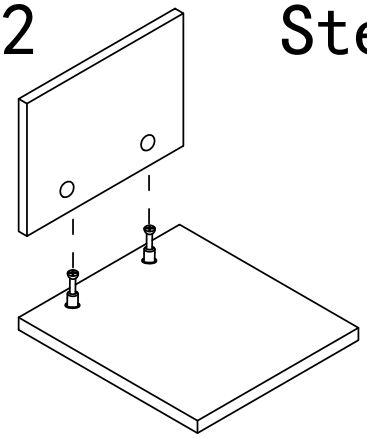


Step3

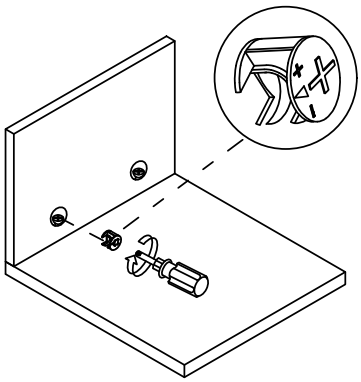

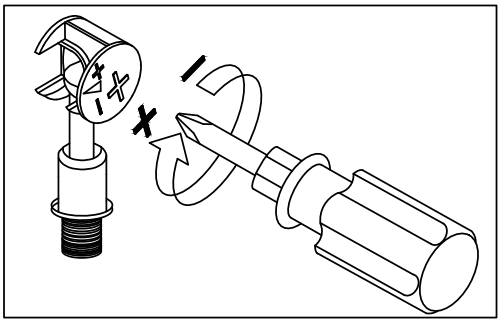


Use a screwdriver to lock in the direction of the "+" sign

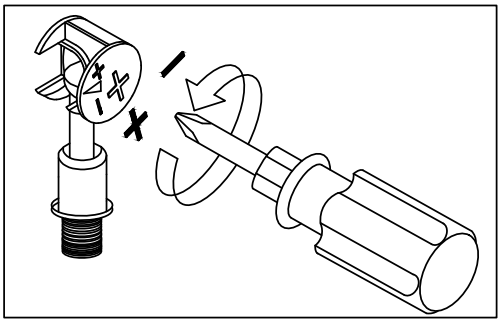


Disassemble along the direction of "-" sign

Step 1




x13

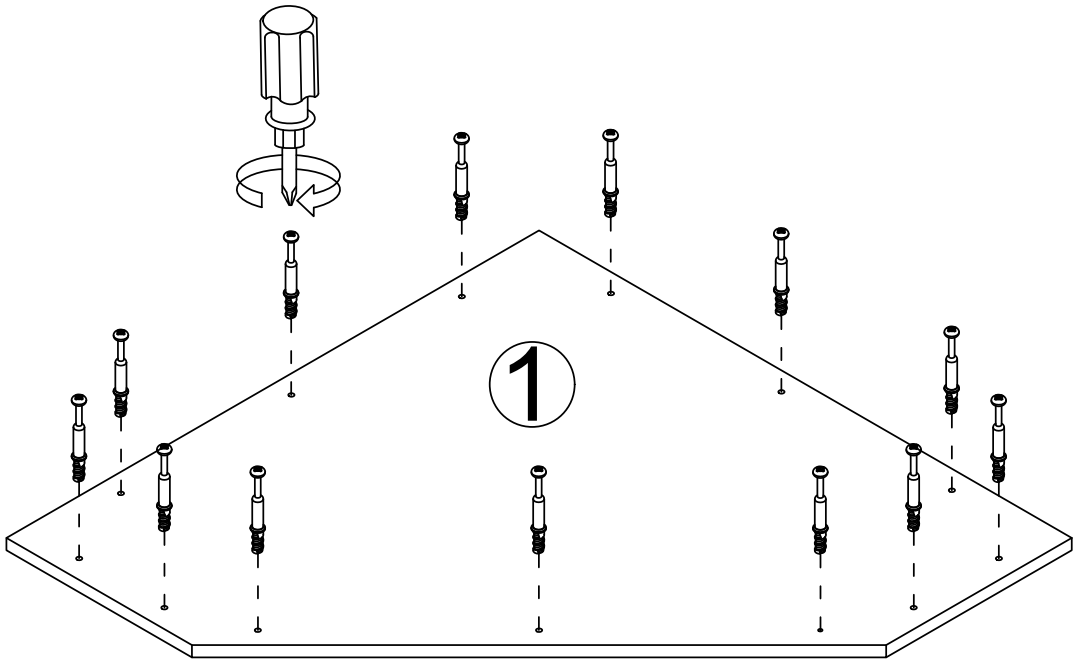


Step 2

B x3

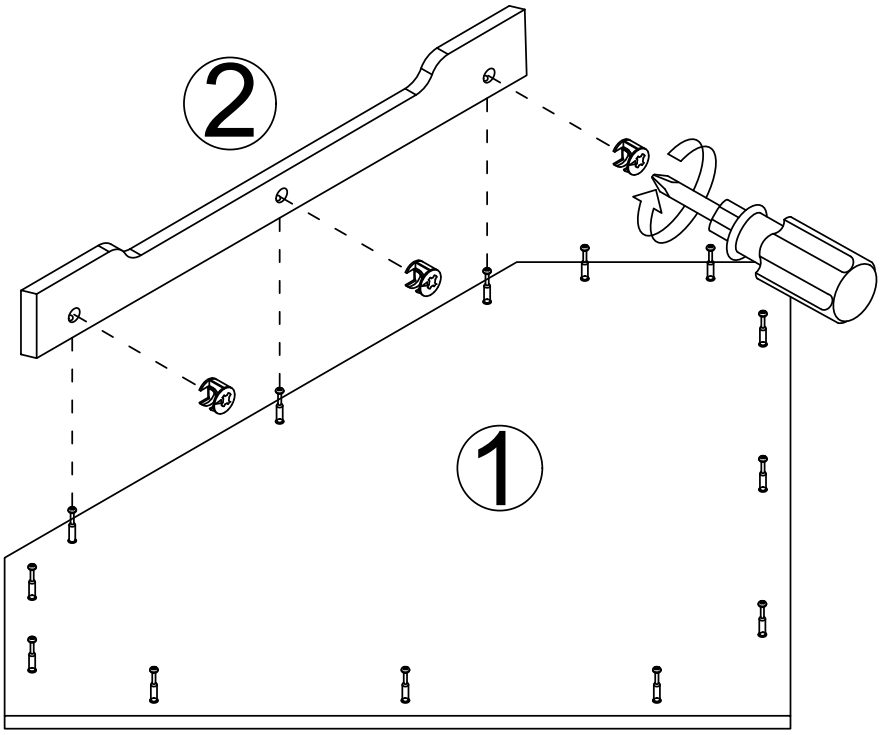


Step 3

A x6

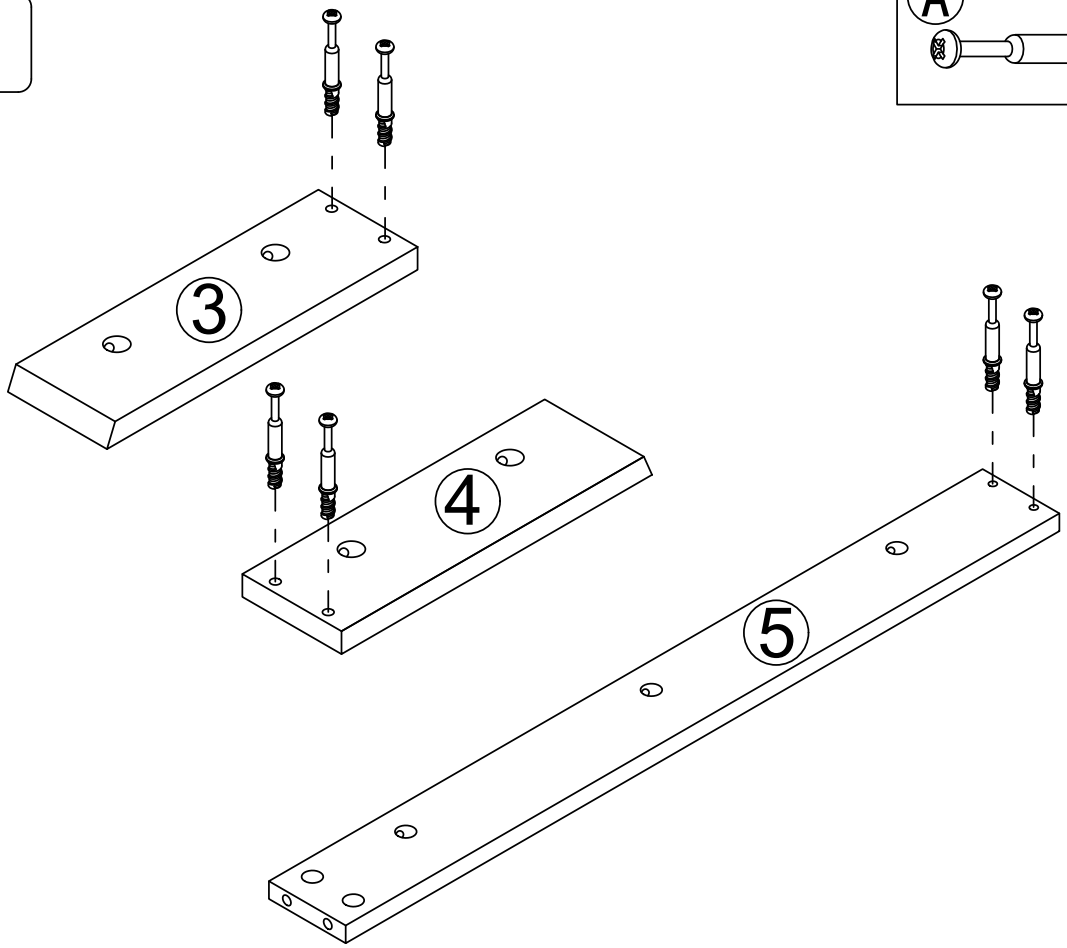


Step 4

Ⓑ  x2

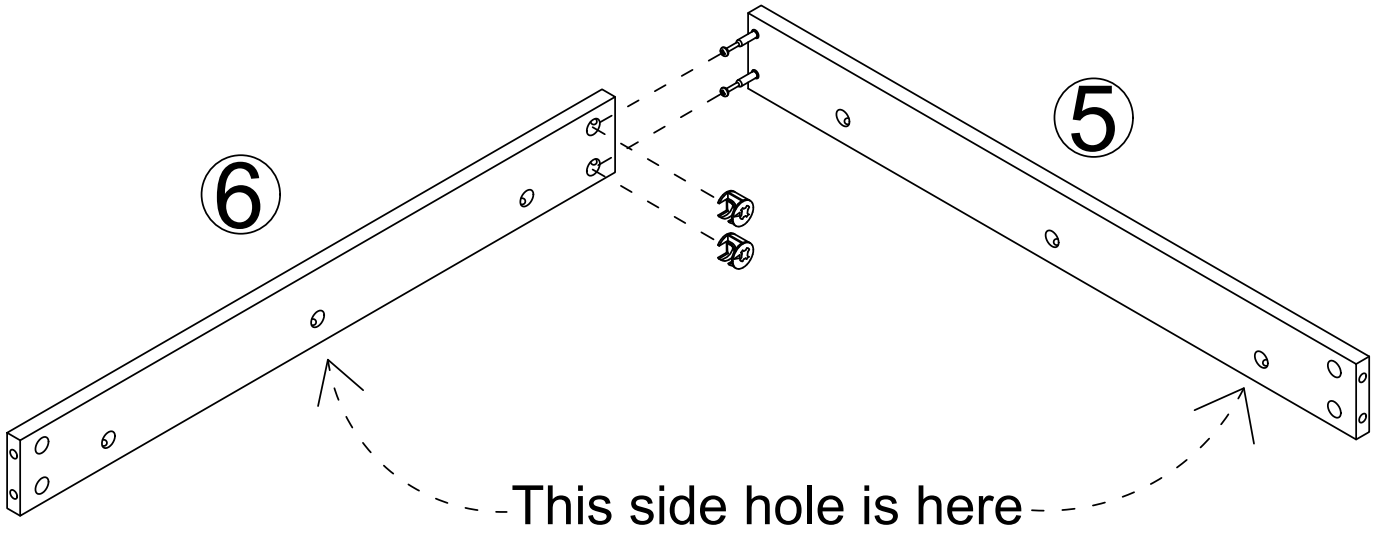


Step 5

Ⓑ  x4

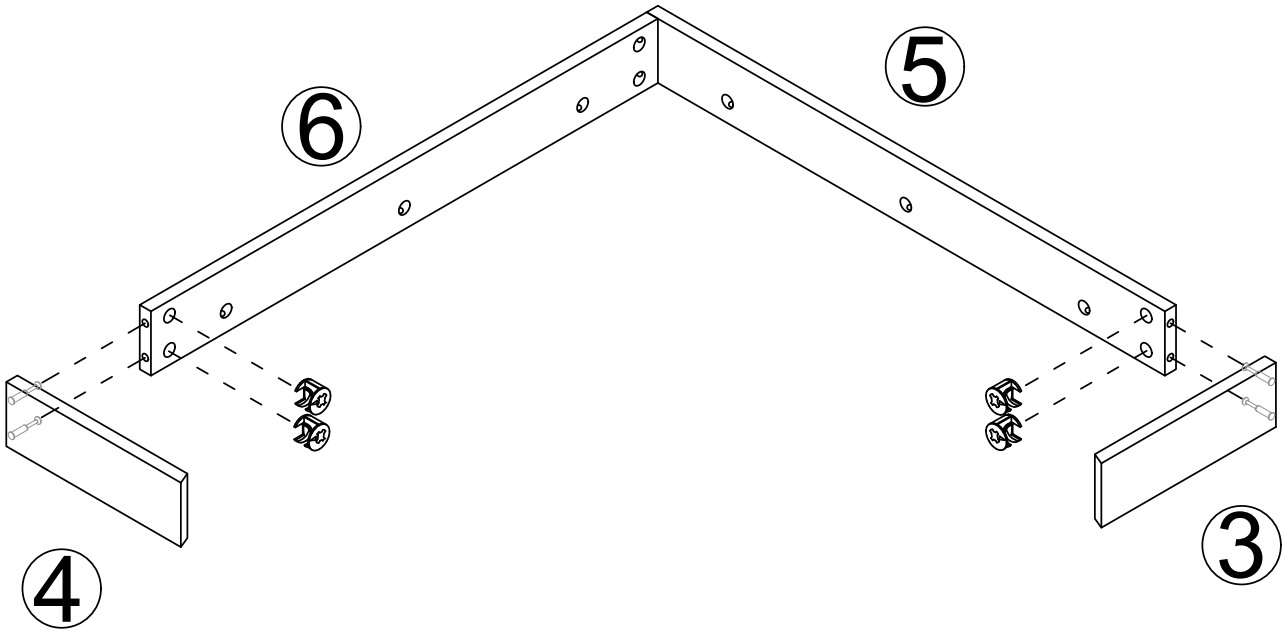


Step 6


B  x10

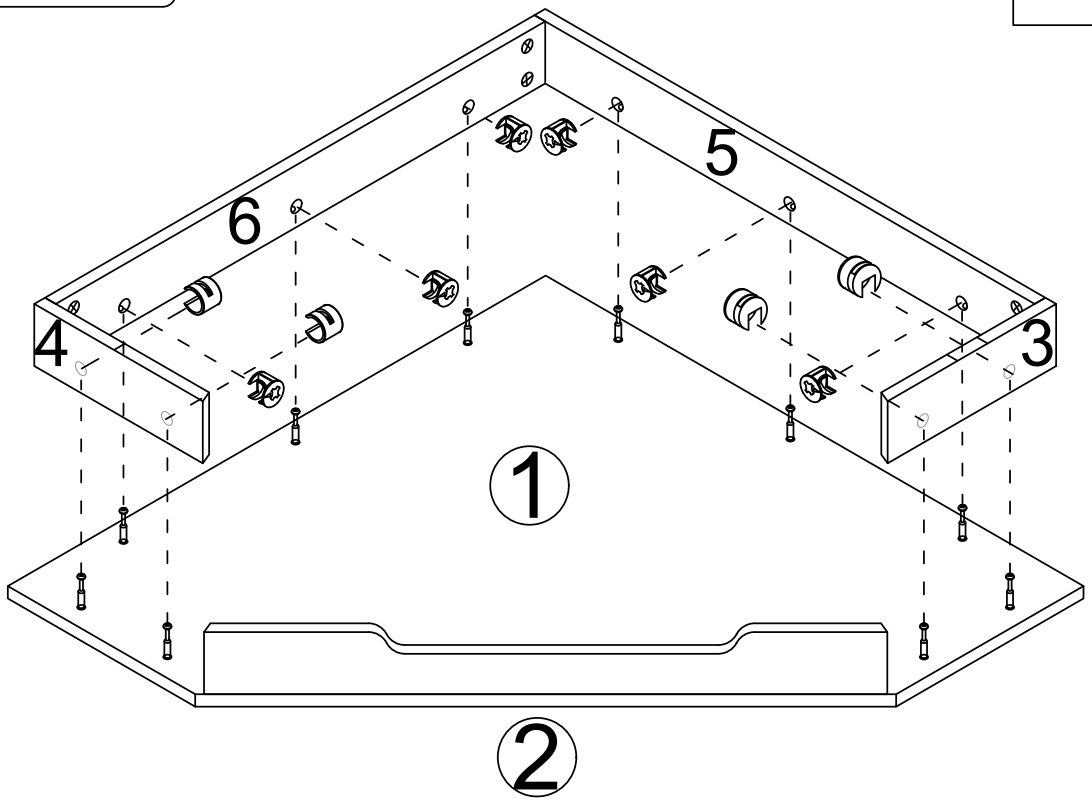


Step 7


C  x10

Tear off release paper and stick the black foot pad on the board

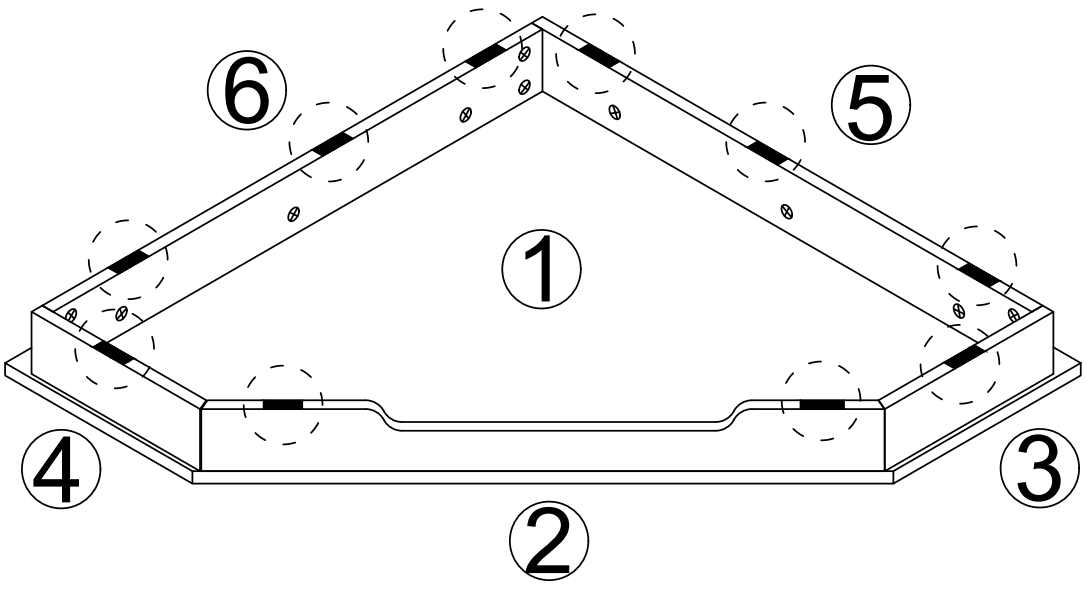



Step 8



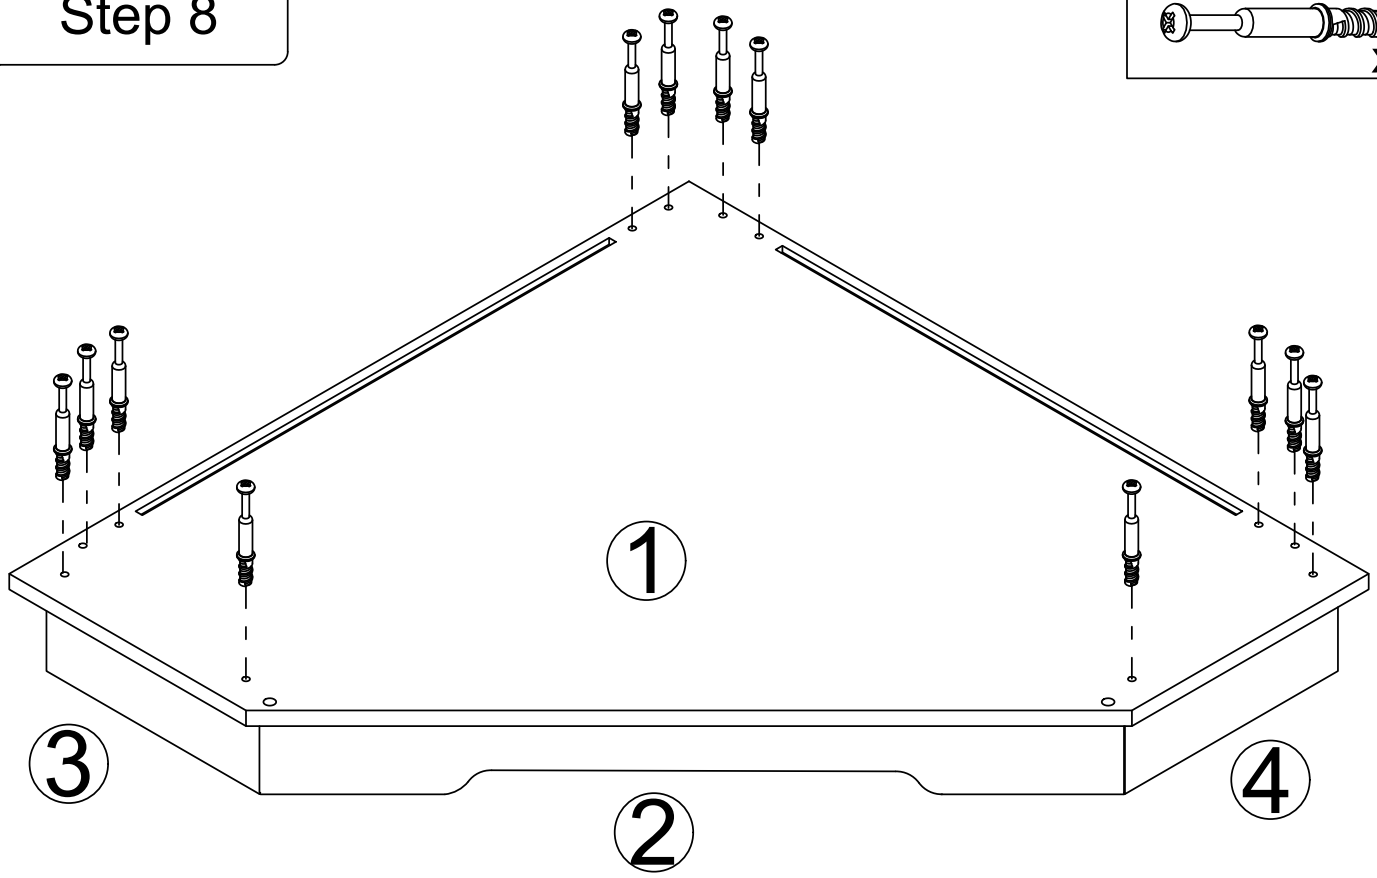

Step 9




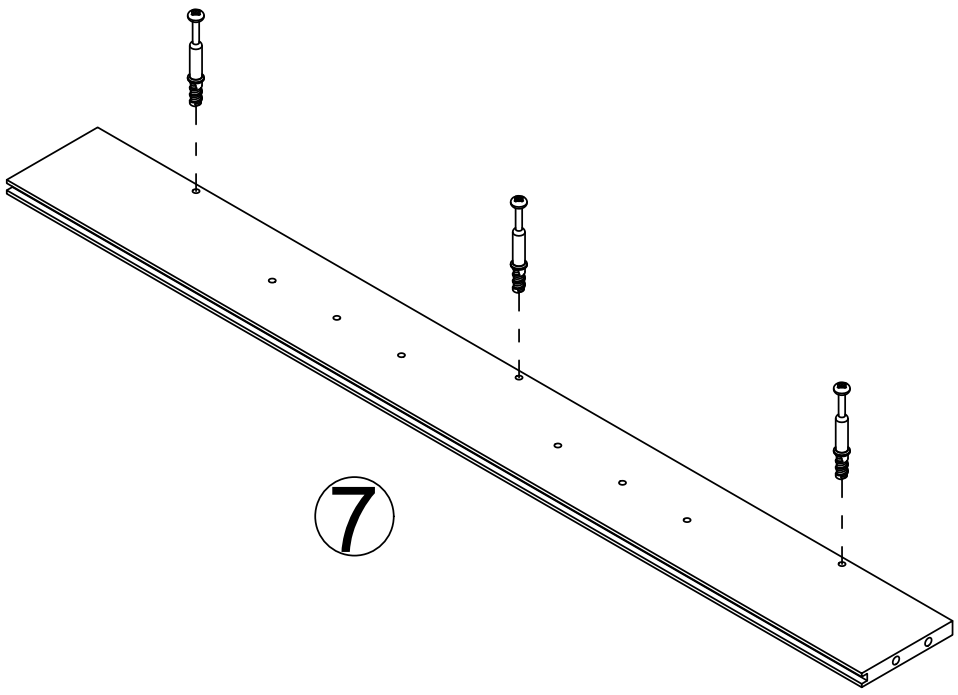

X 2

Step 10


Ⓑ x6

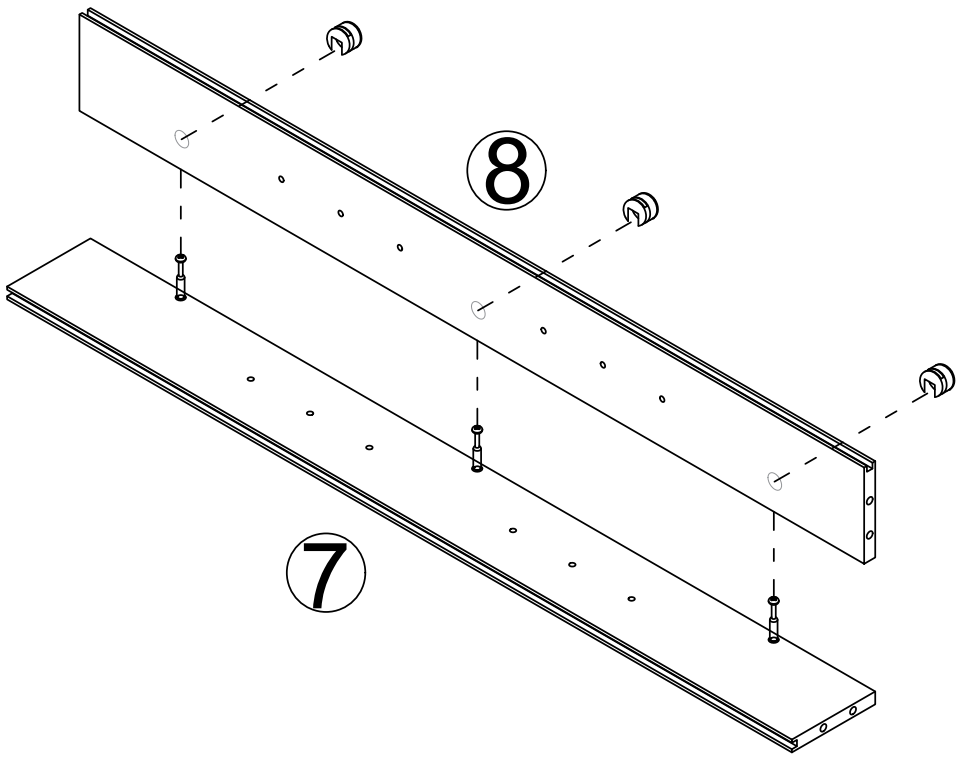

X 2

Step 11


Ⓐ x9

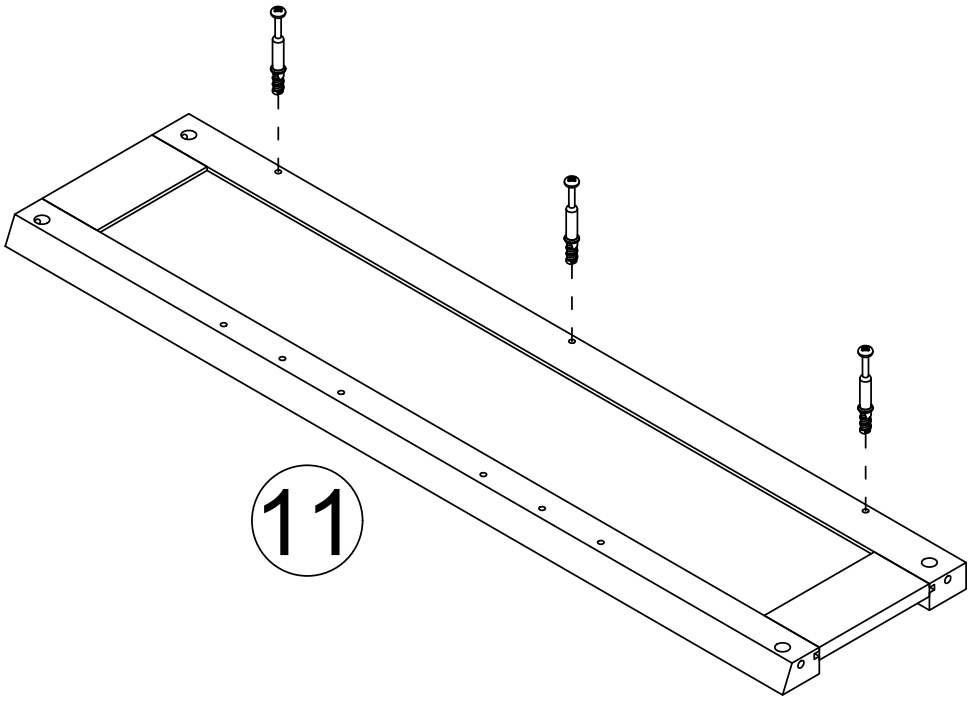

X 3

Step 12


B  x9

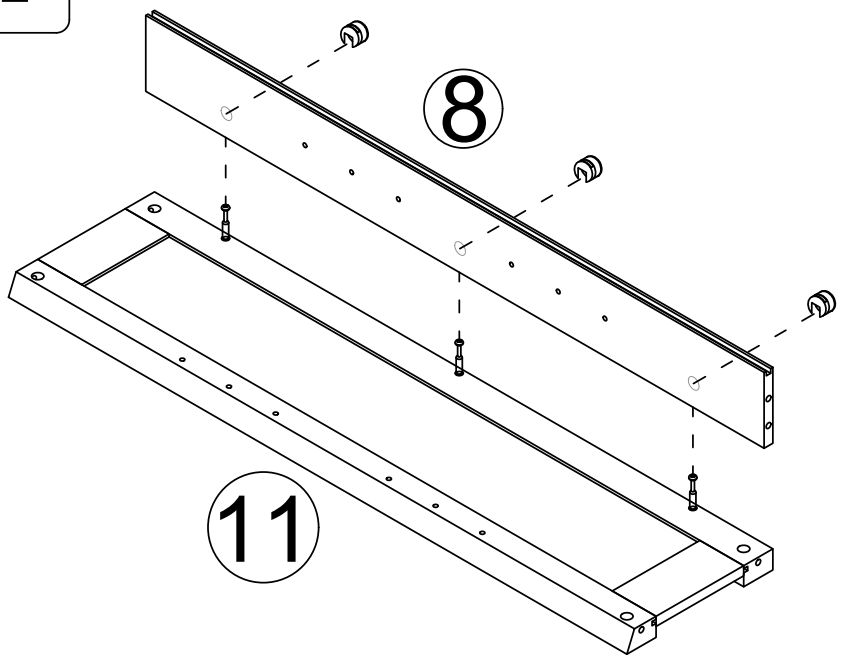


X 3

Step 13


B  x12

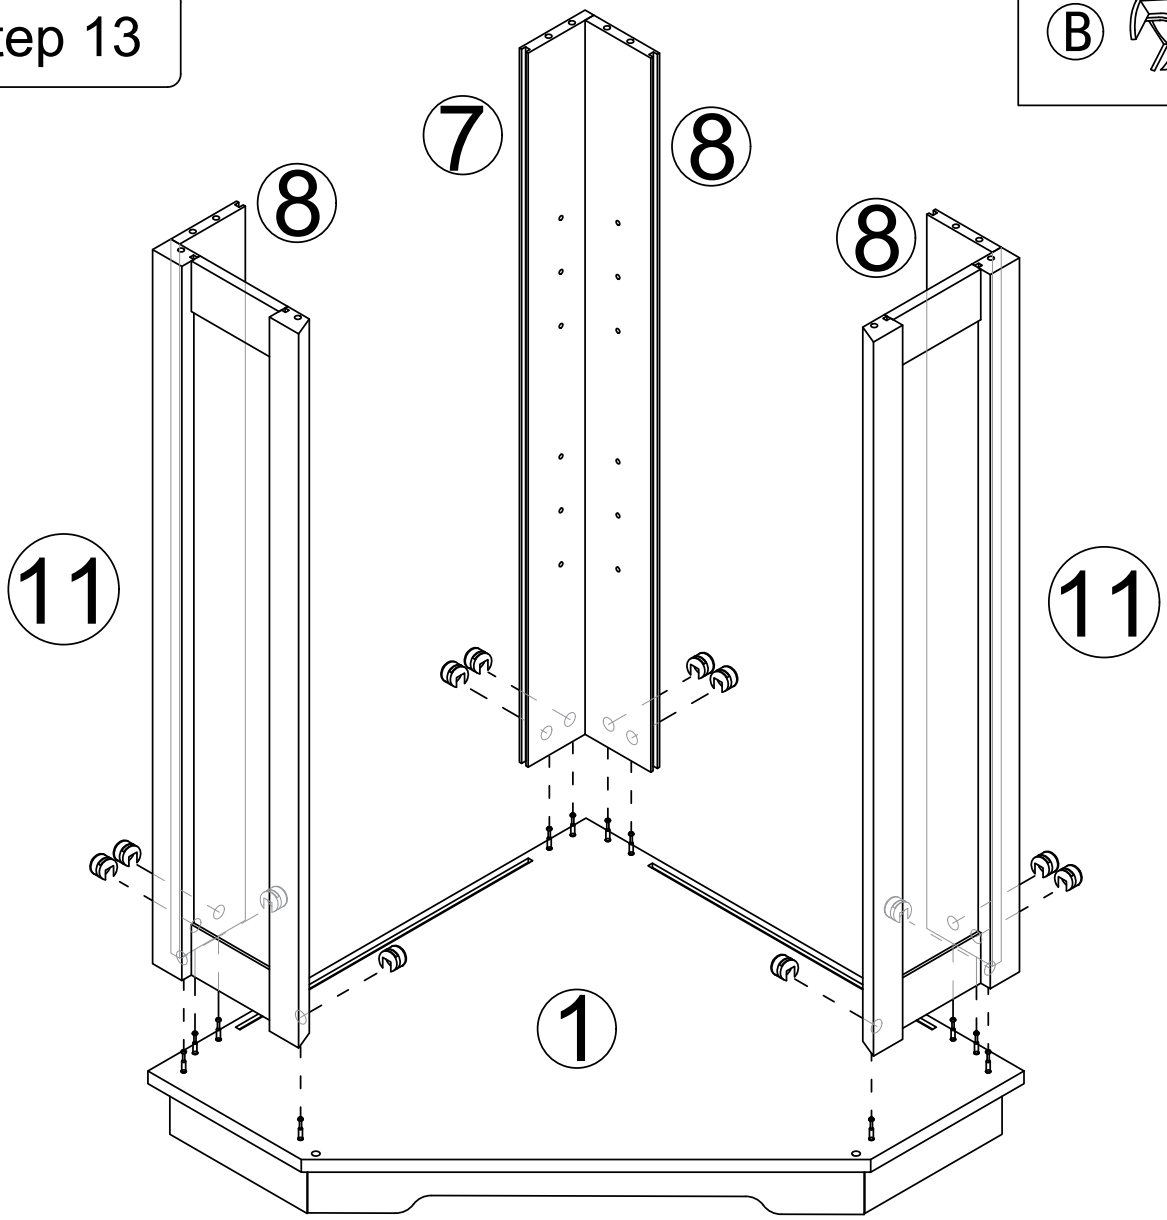



Step 14

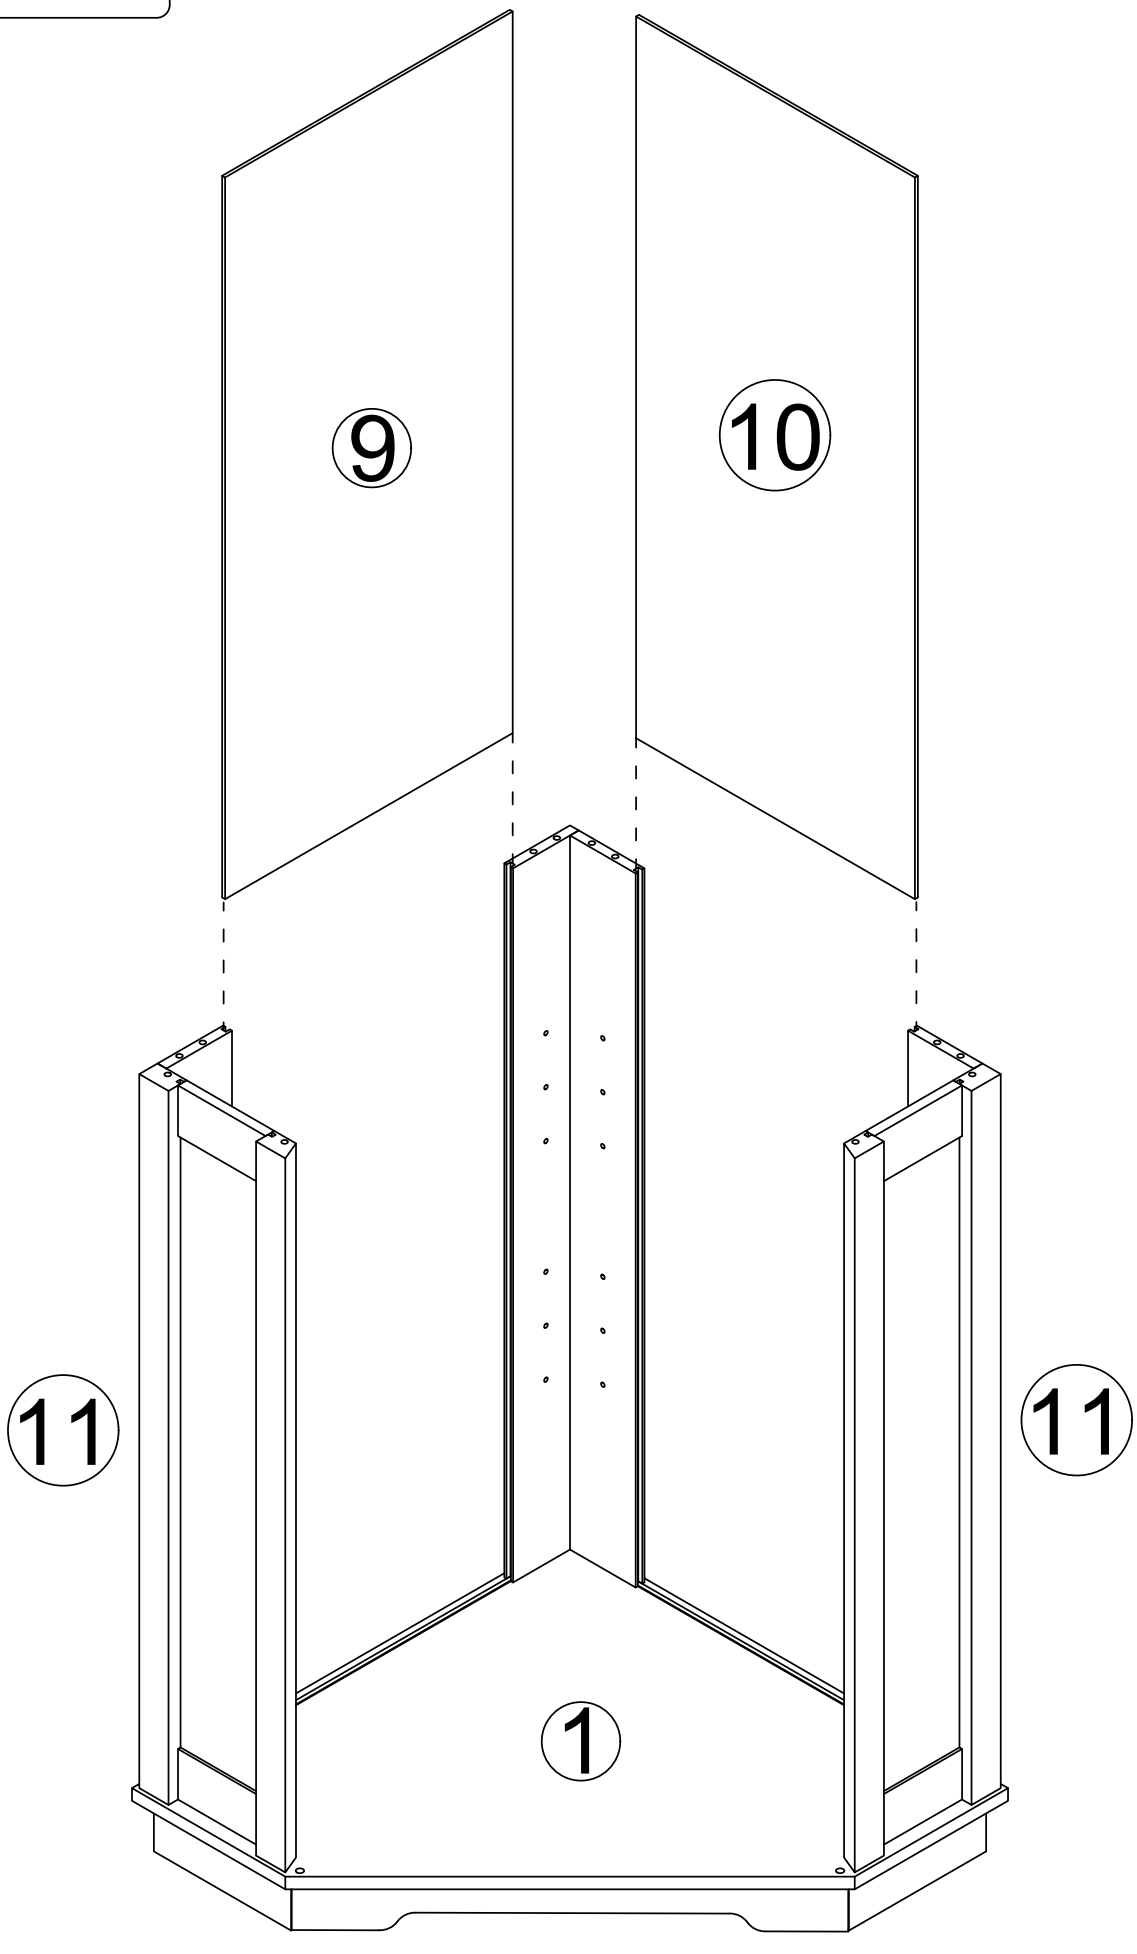

Step 15




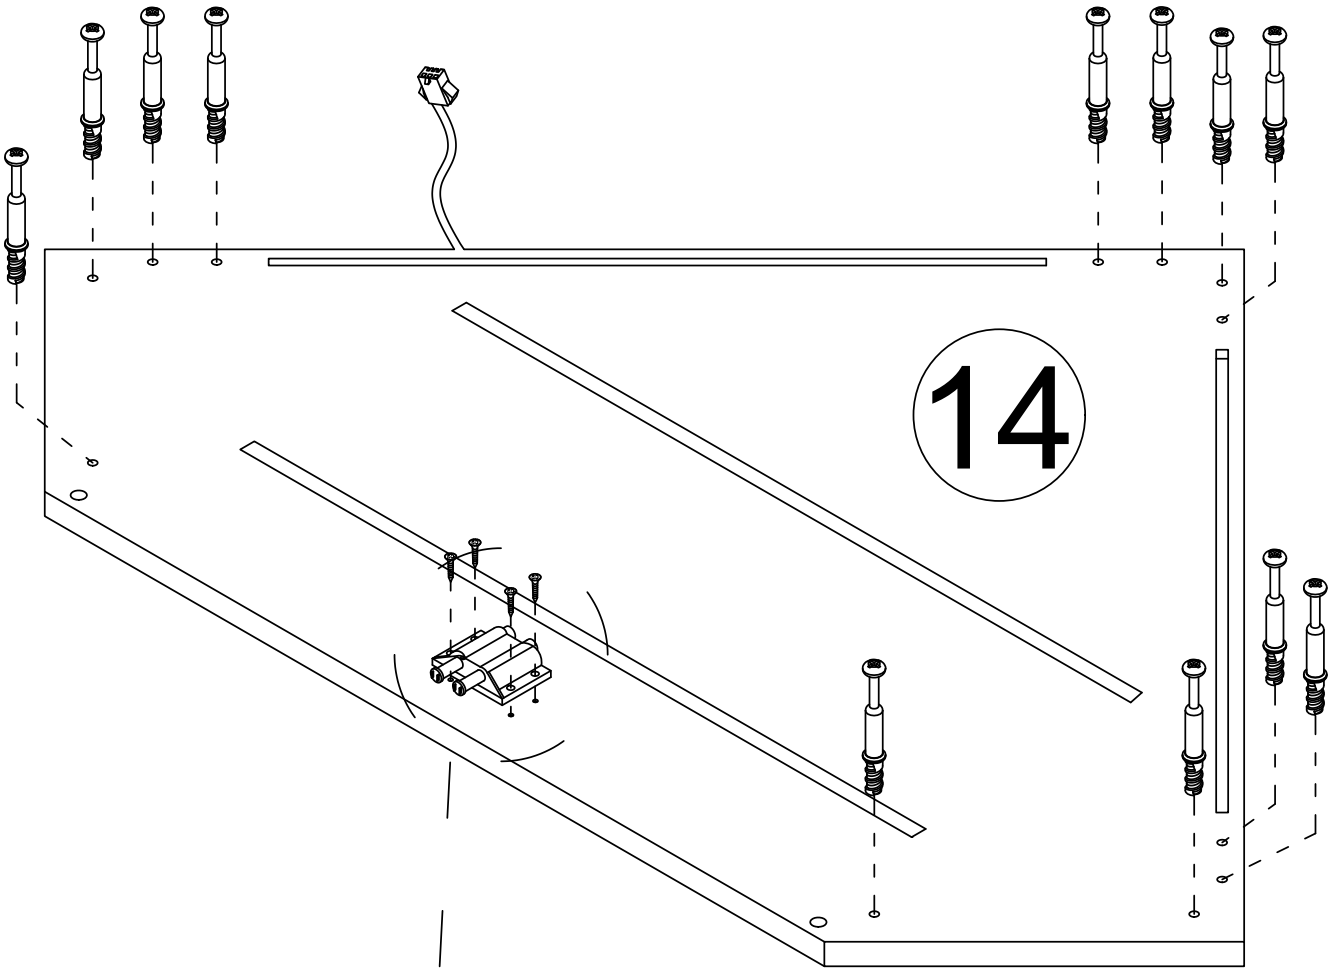

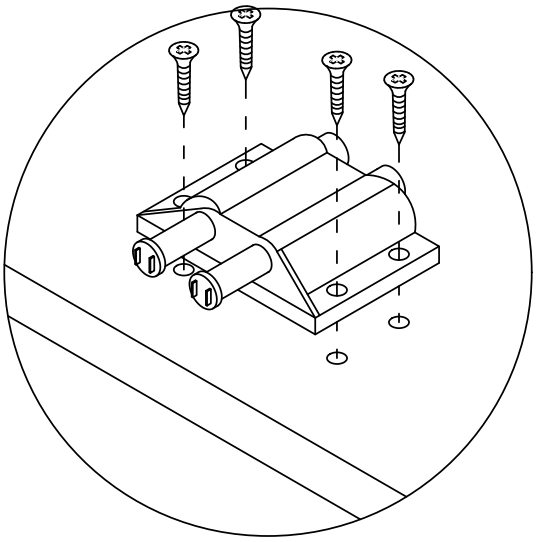



Step 16

B  x12

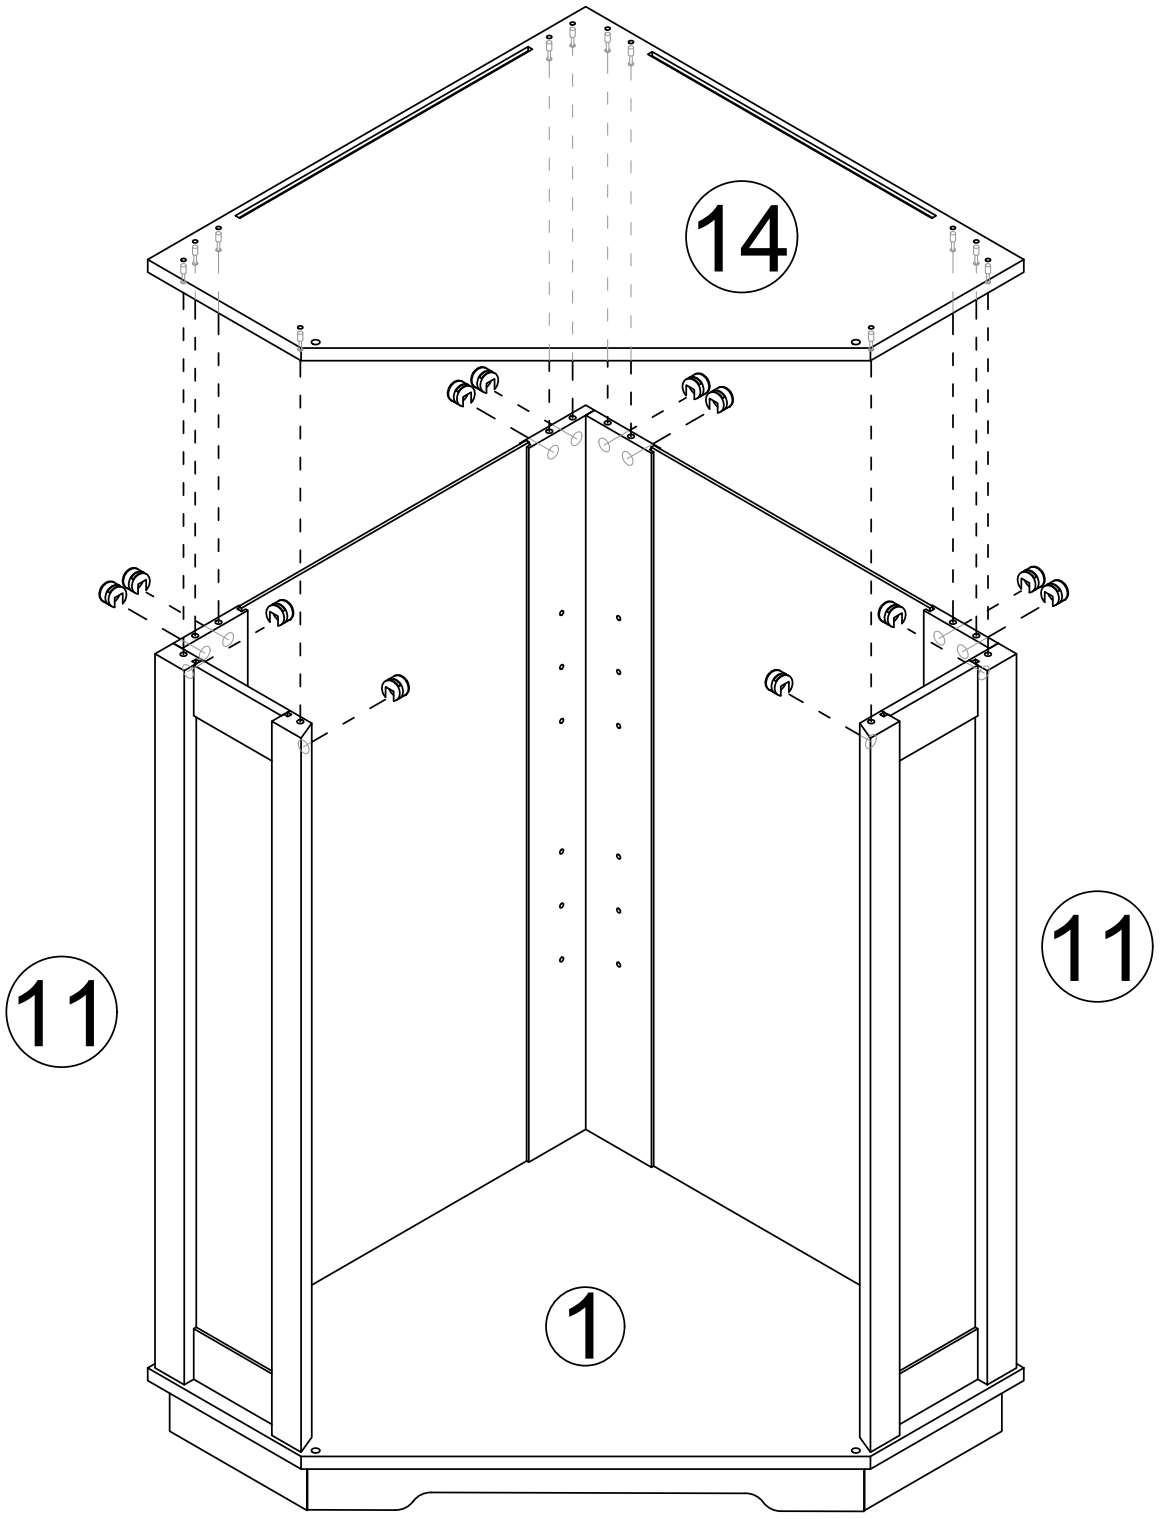



Step 17



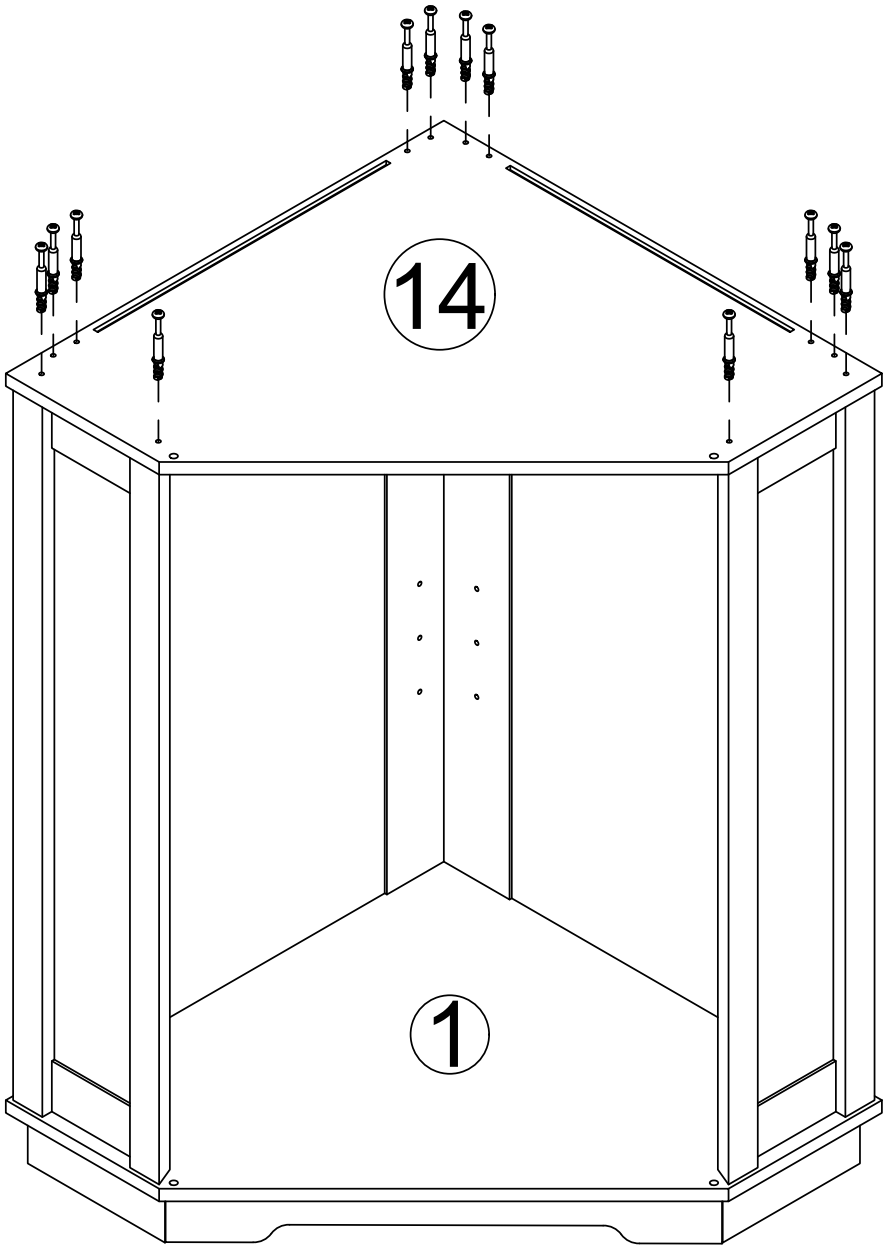



Step 18

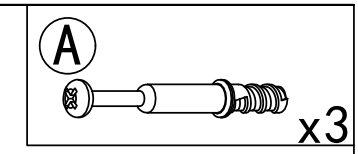

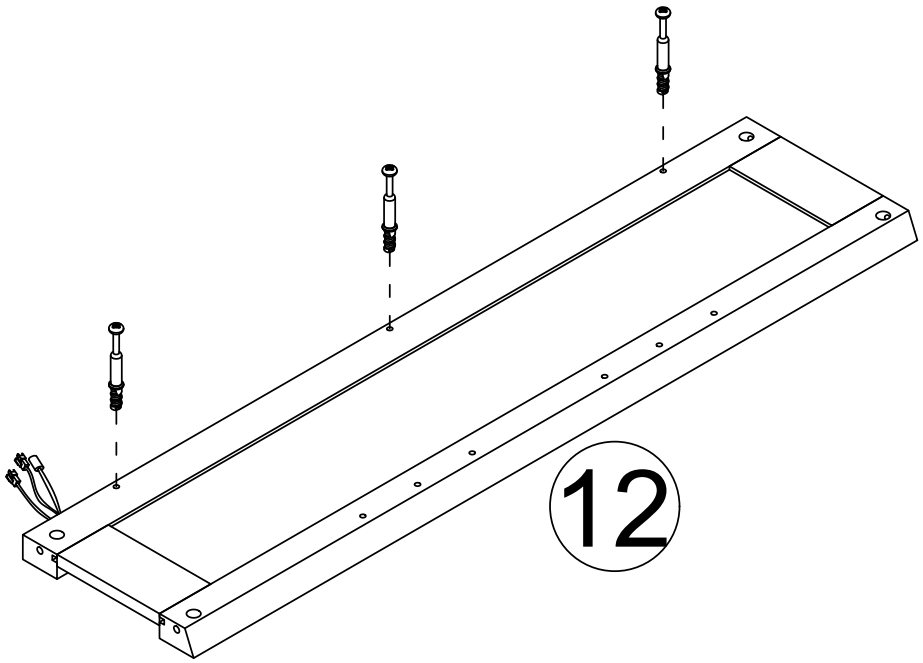


Step 19



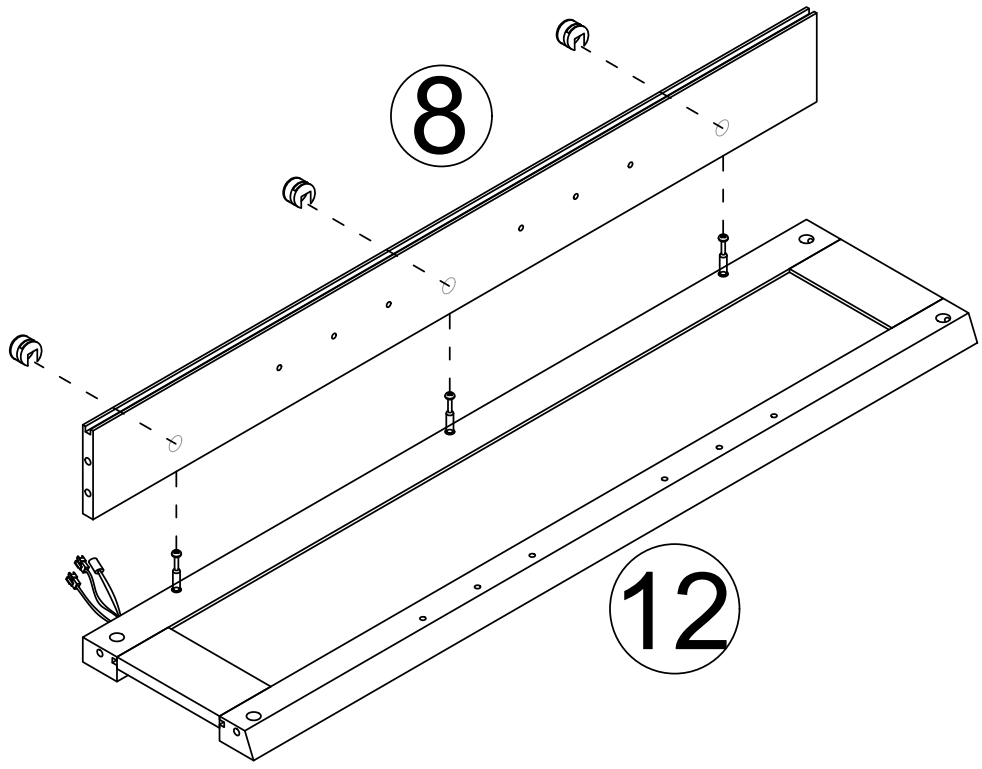


Step 20


B x12

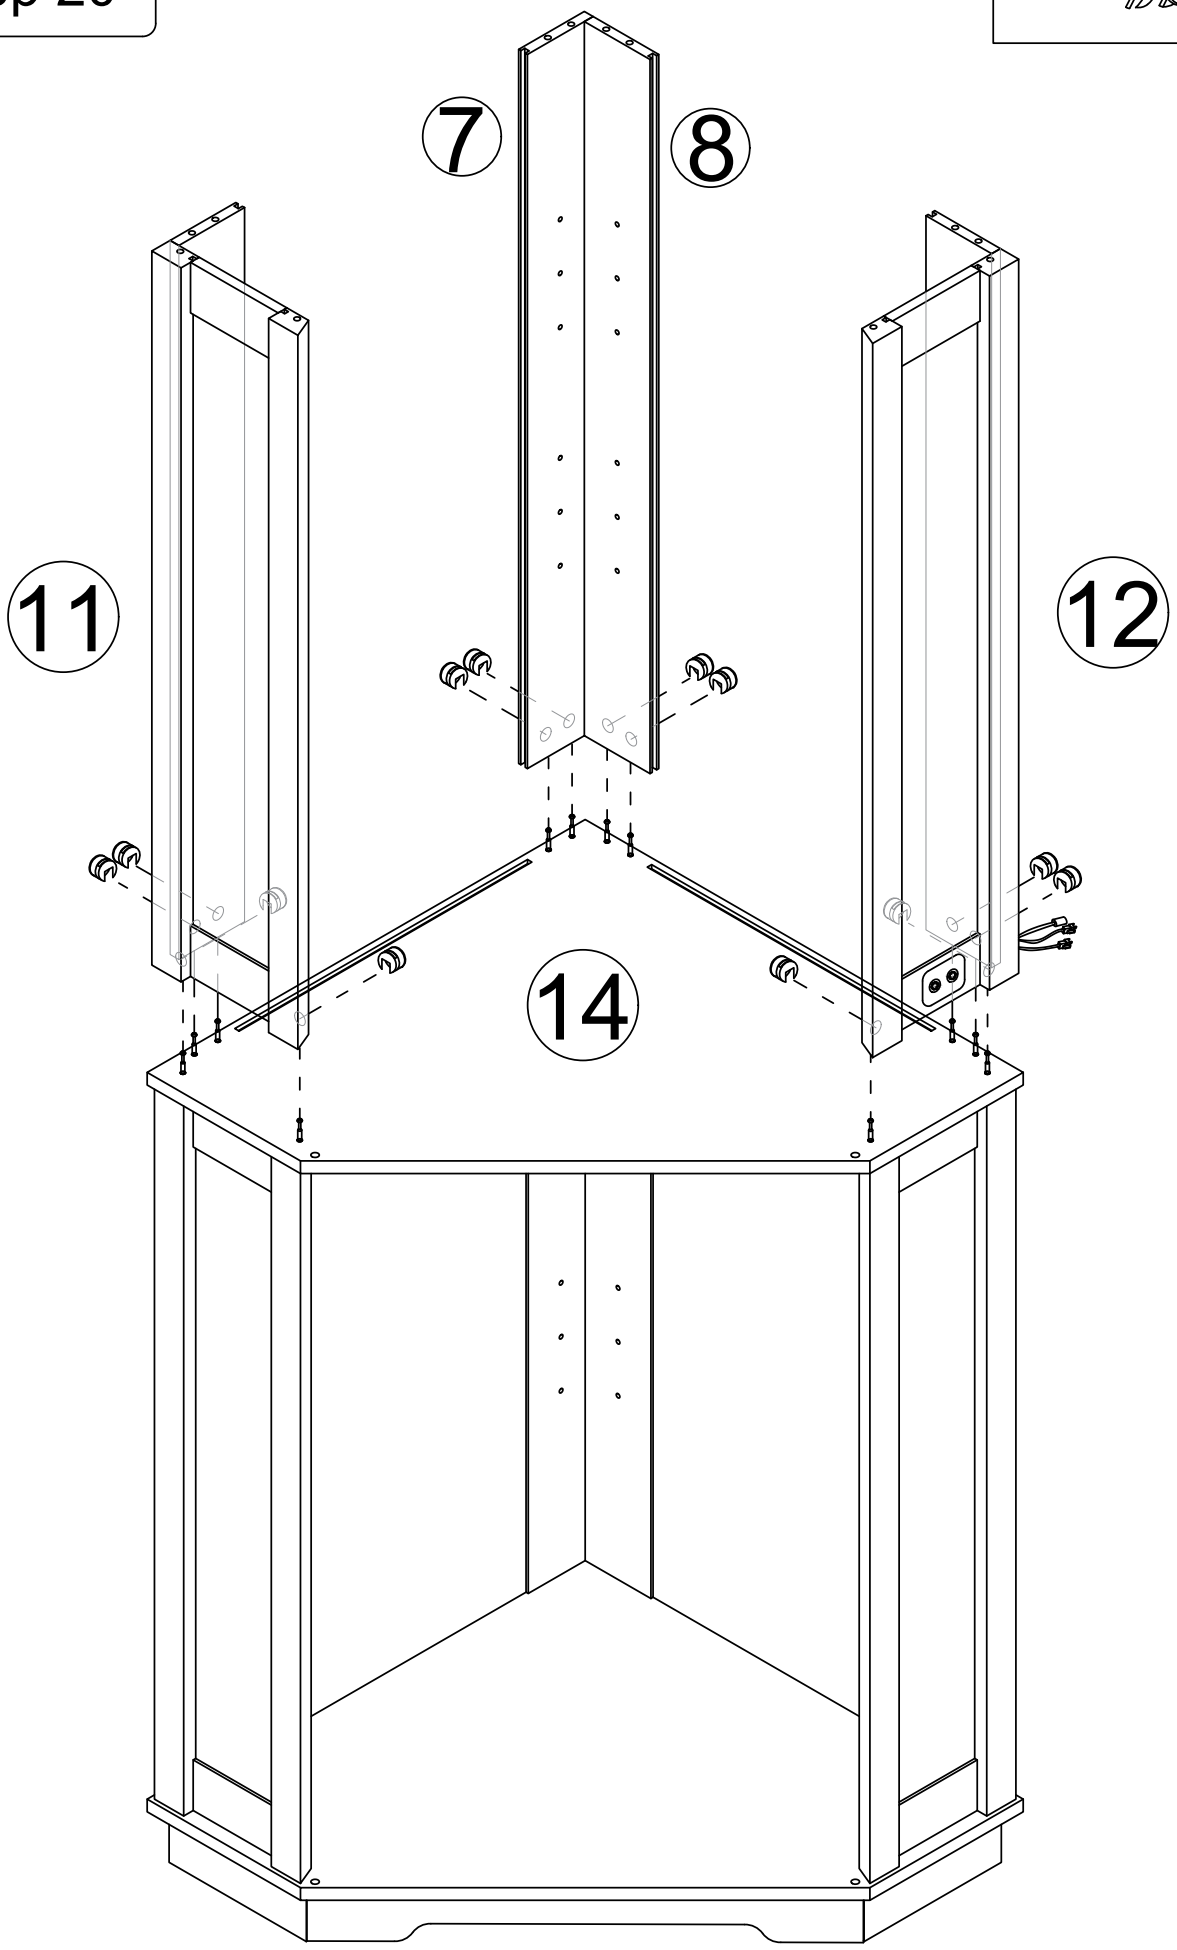



Step 21

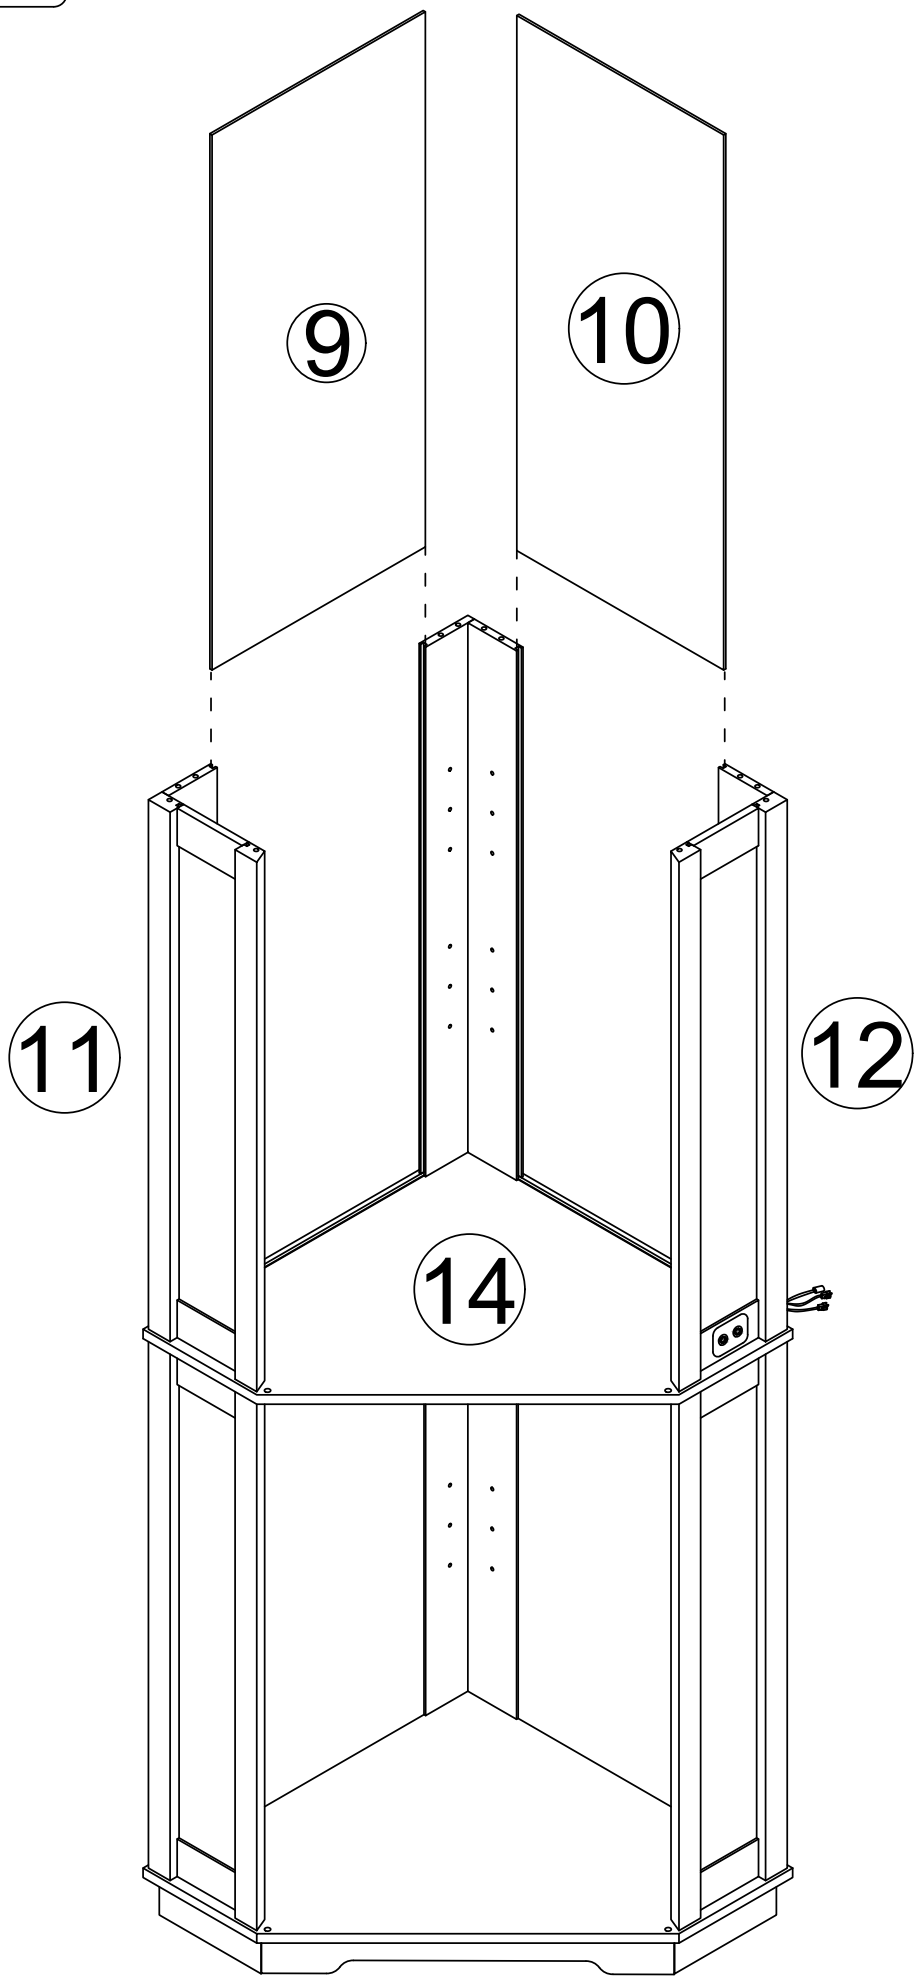

Step 22




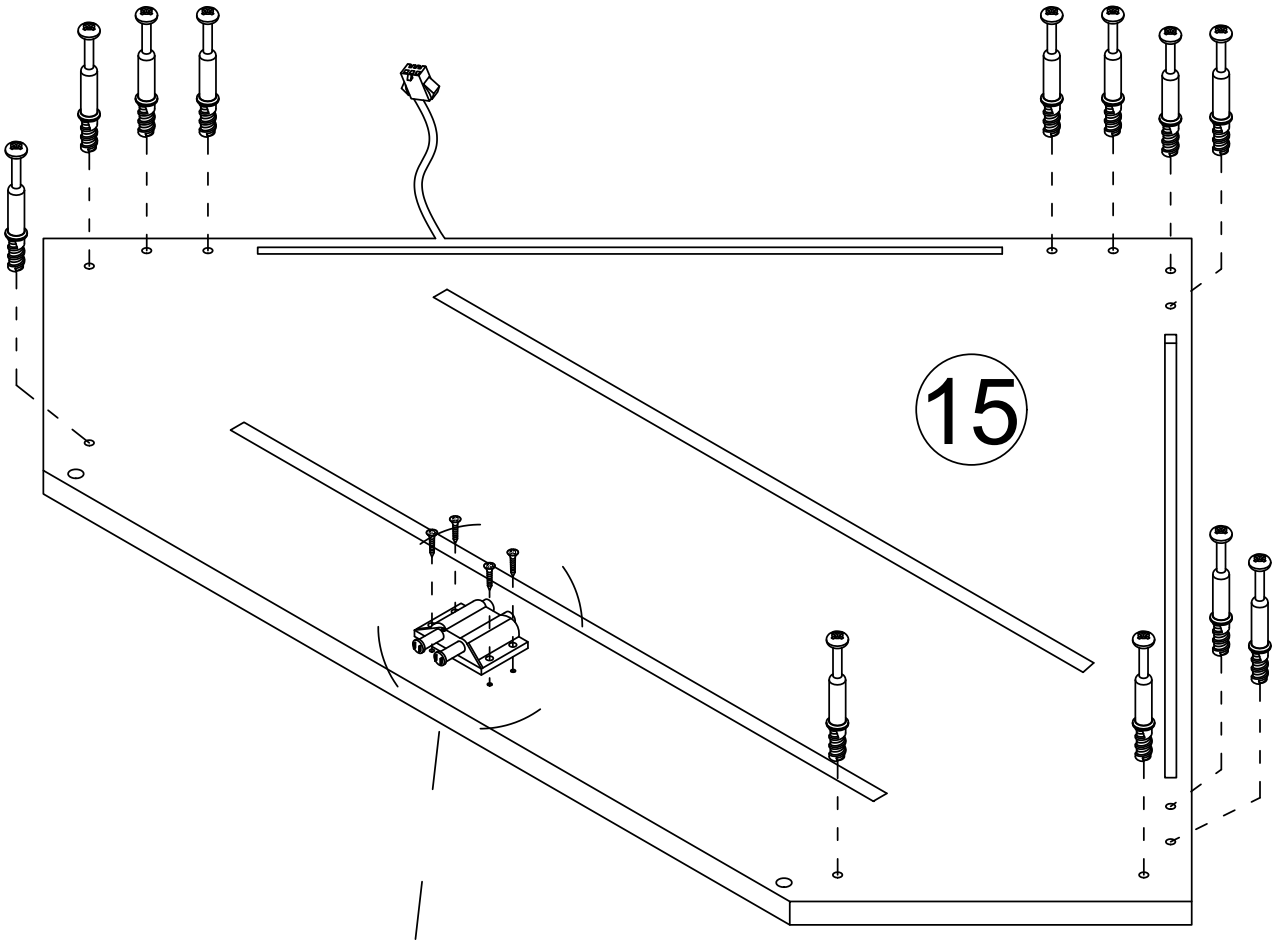

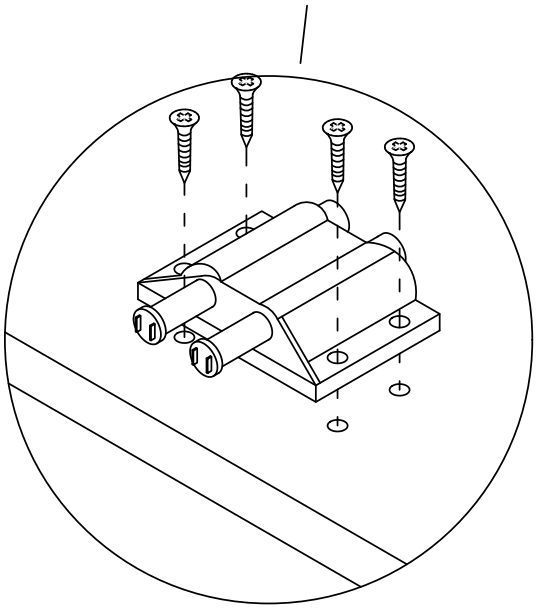



Step 23

Ⓑ x12

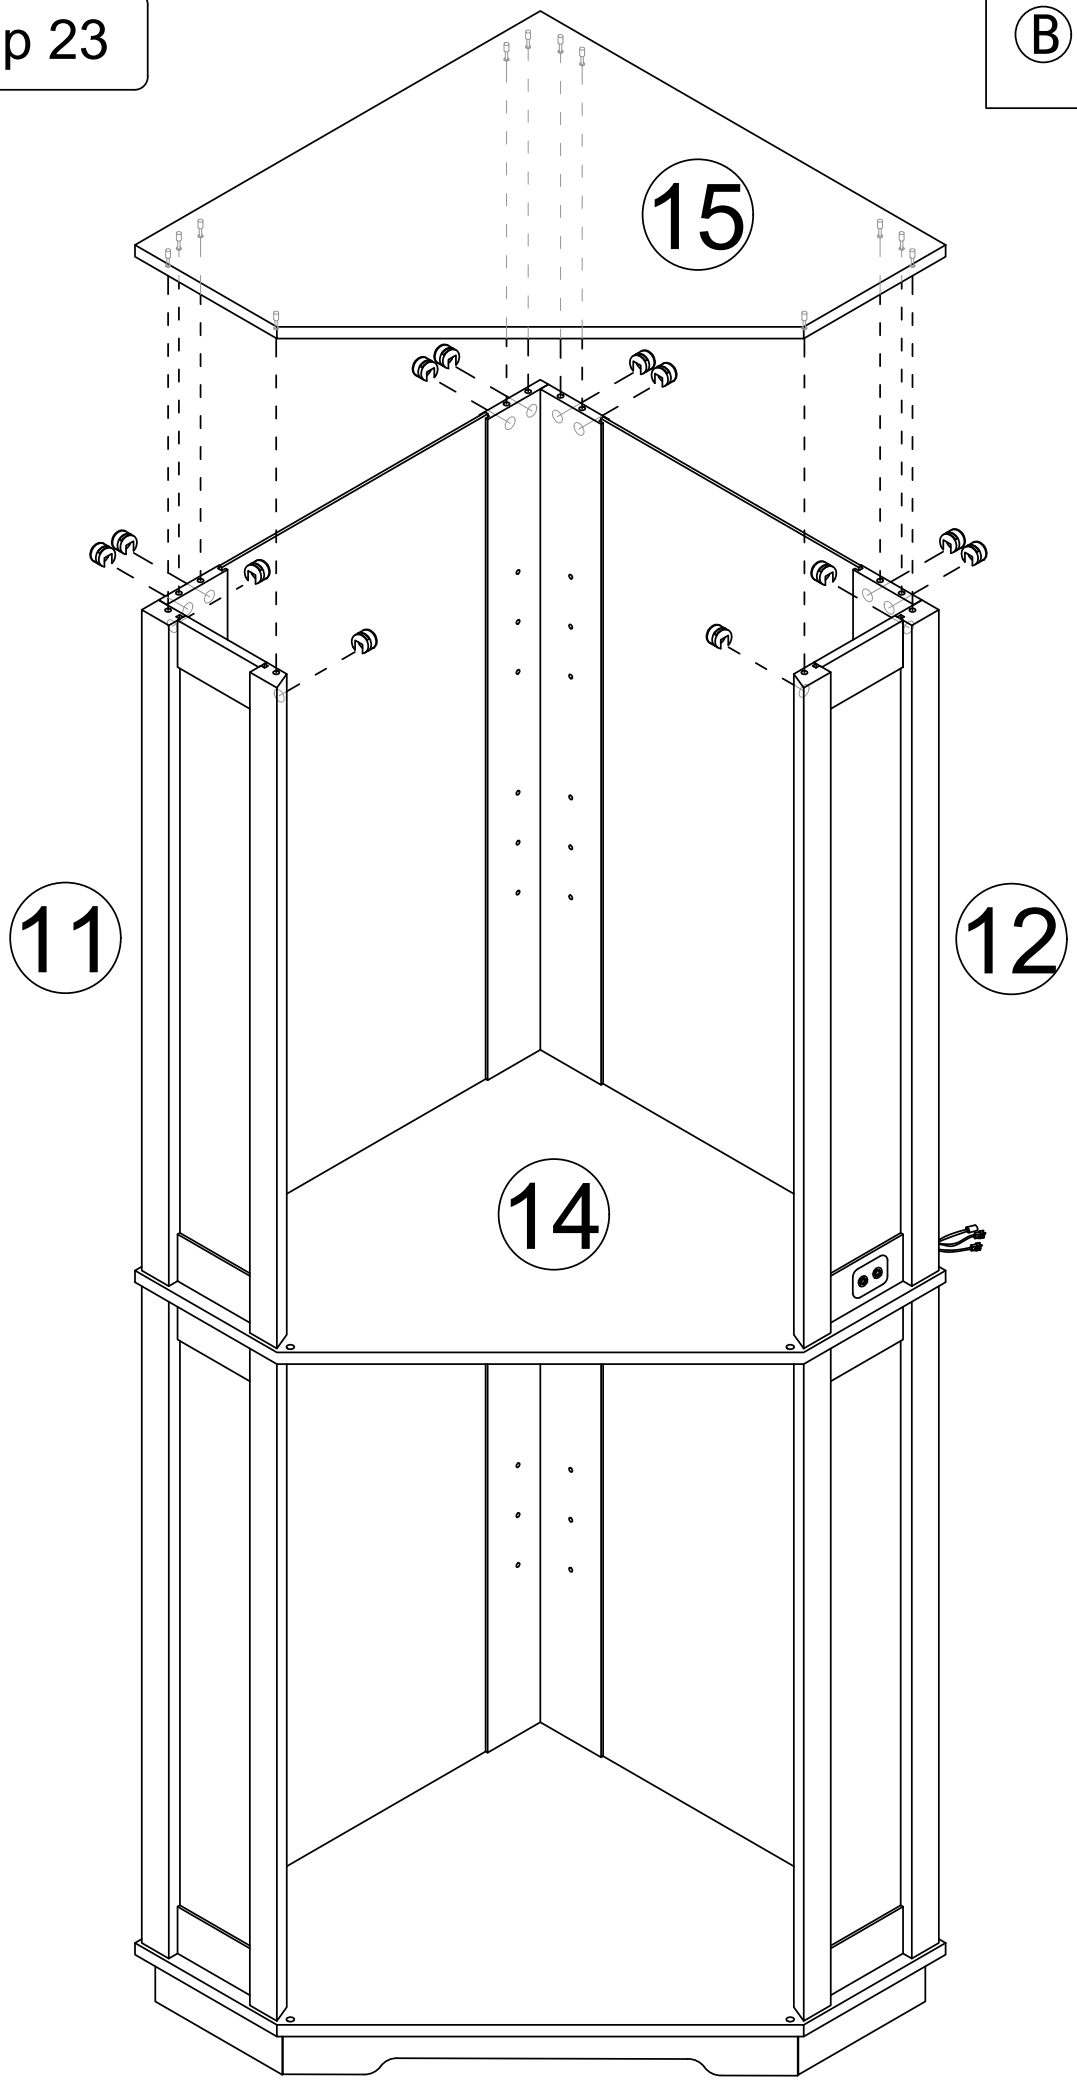


Step 24



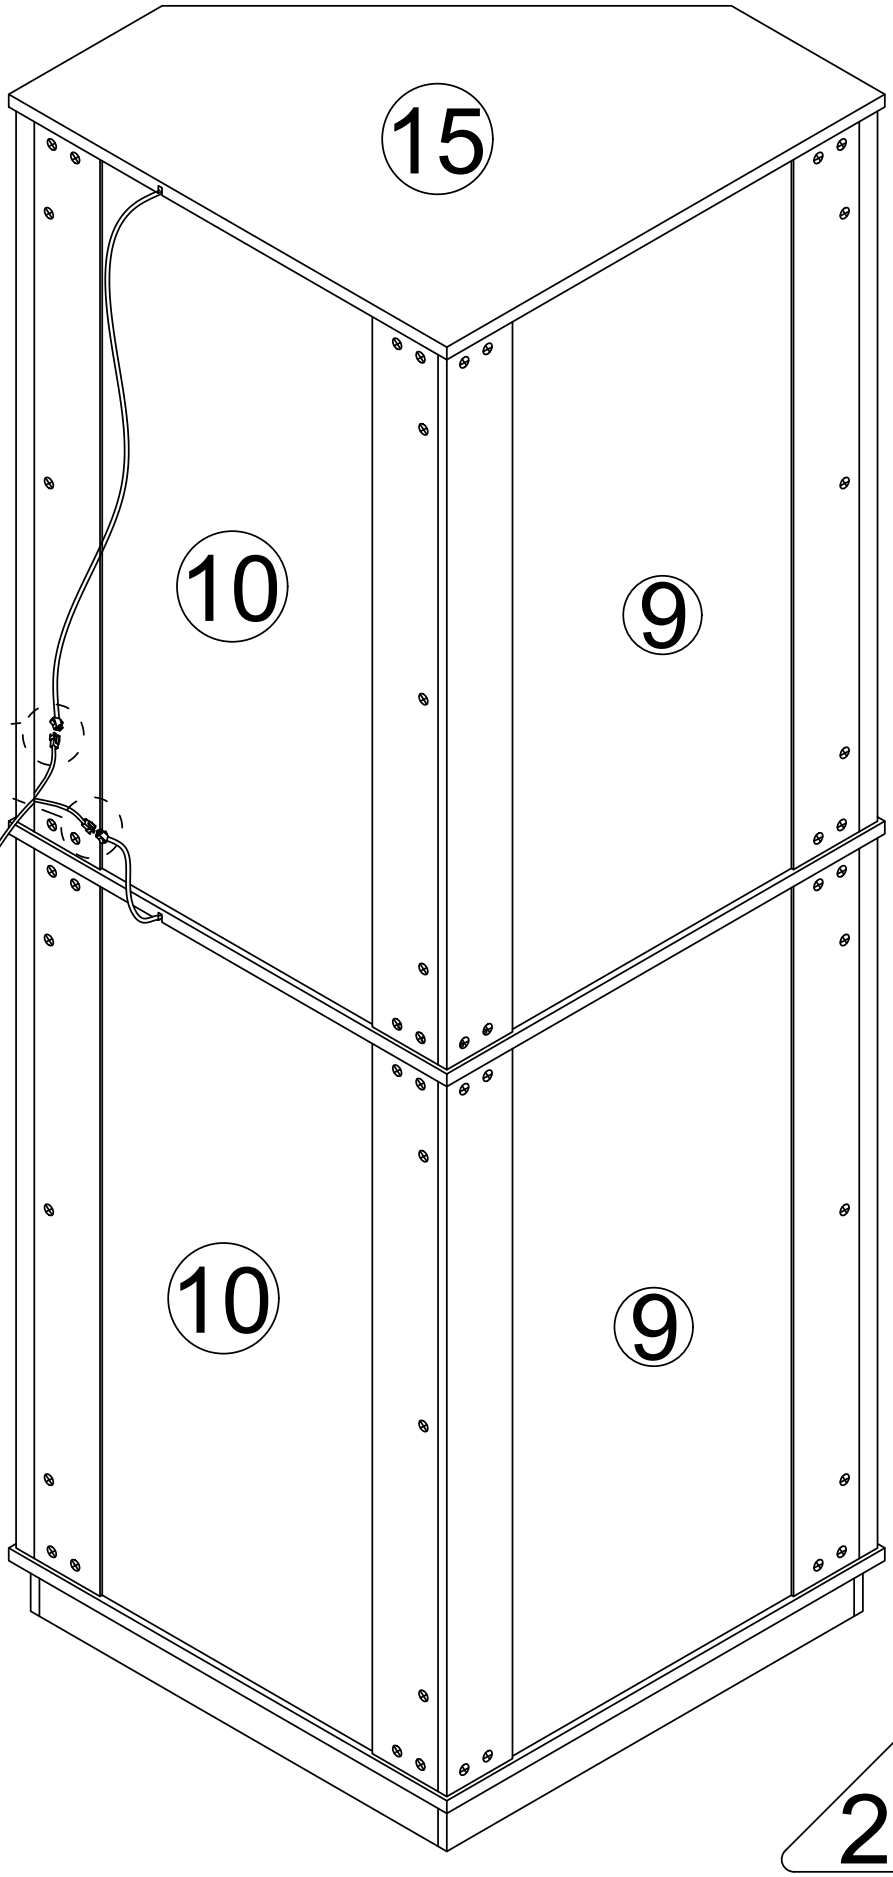

Step 25


E x2

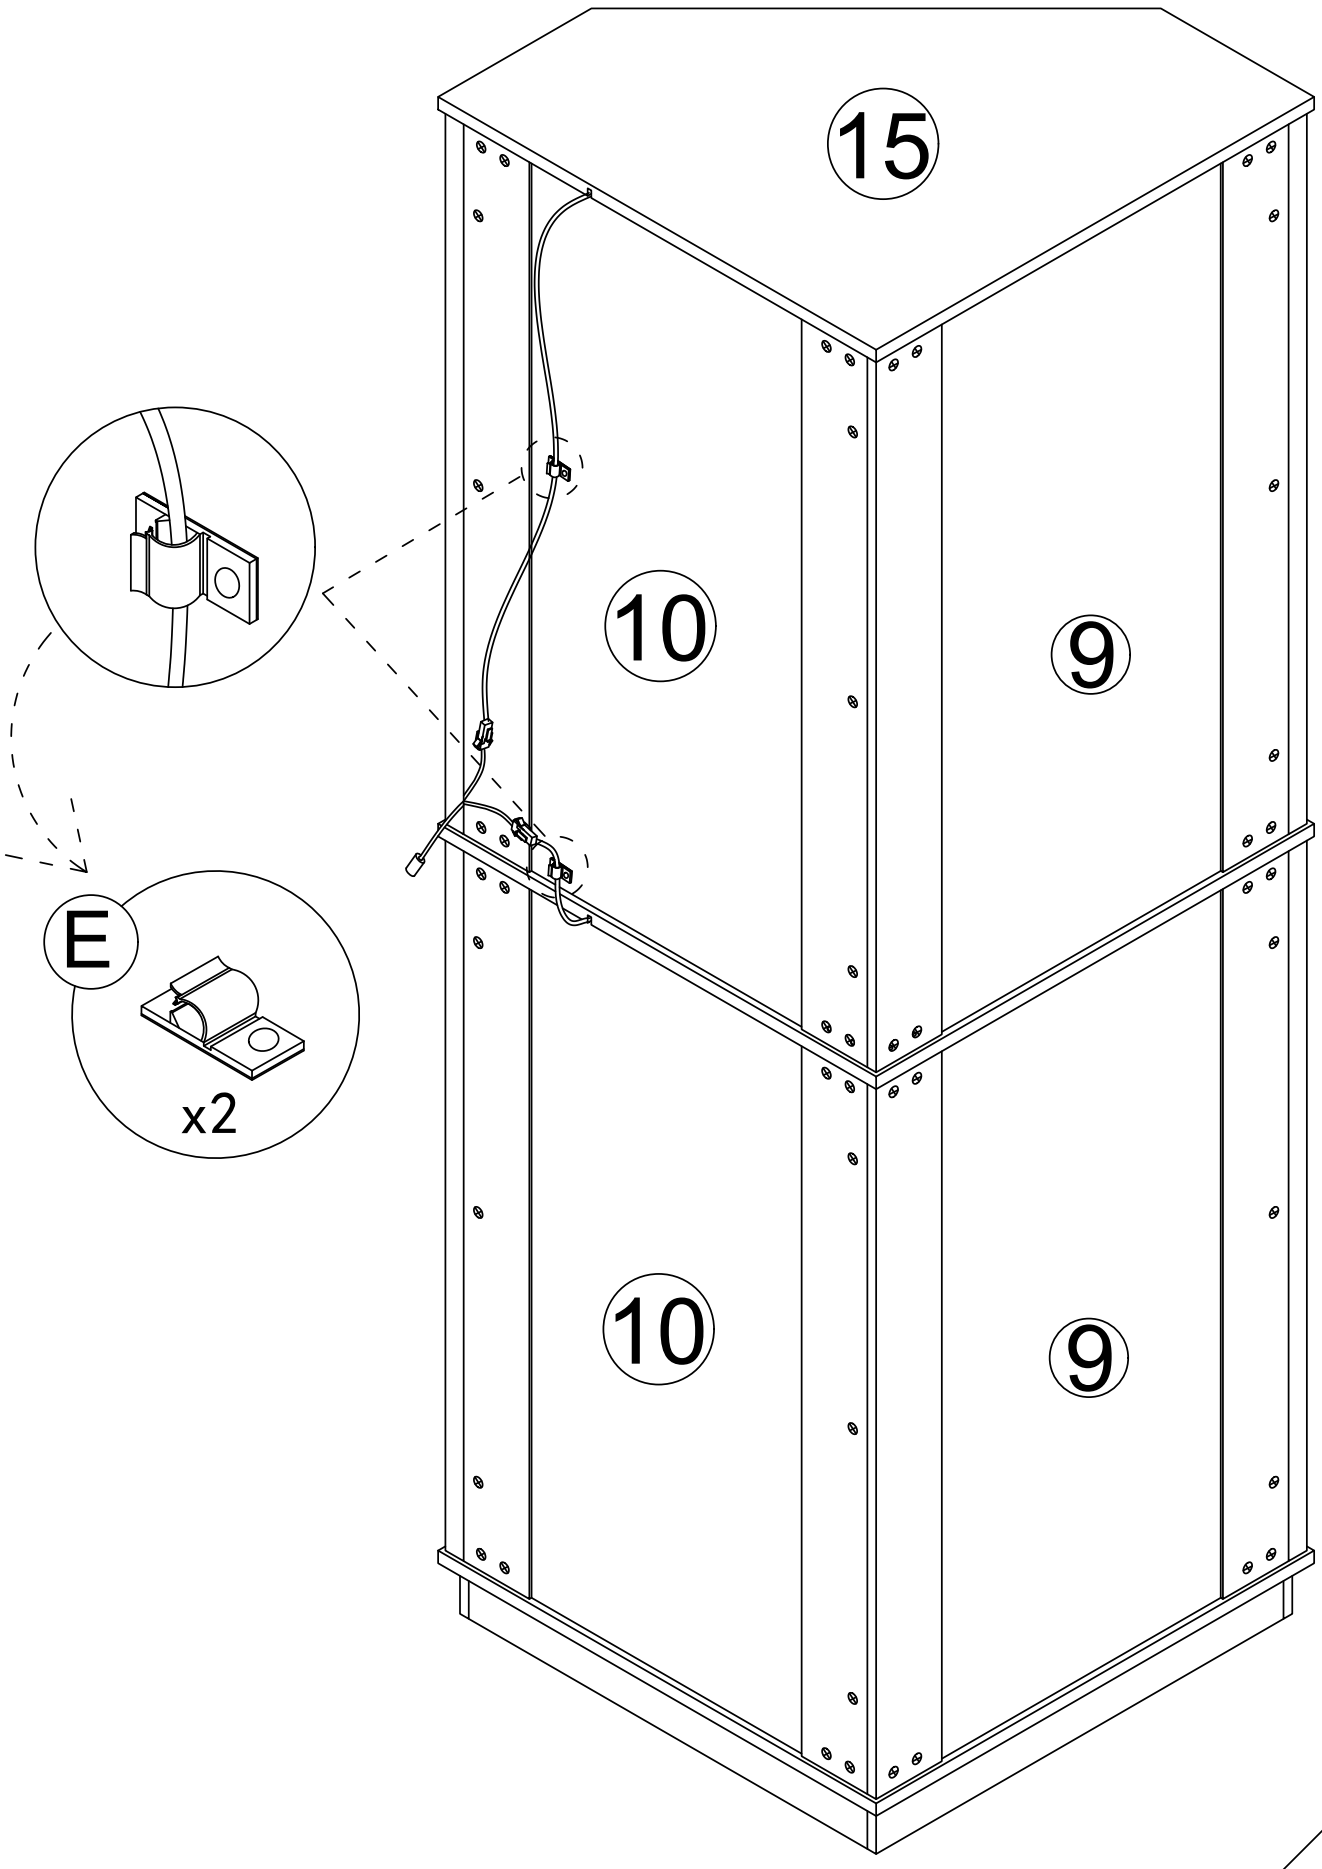

Step 26


F

x16

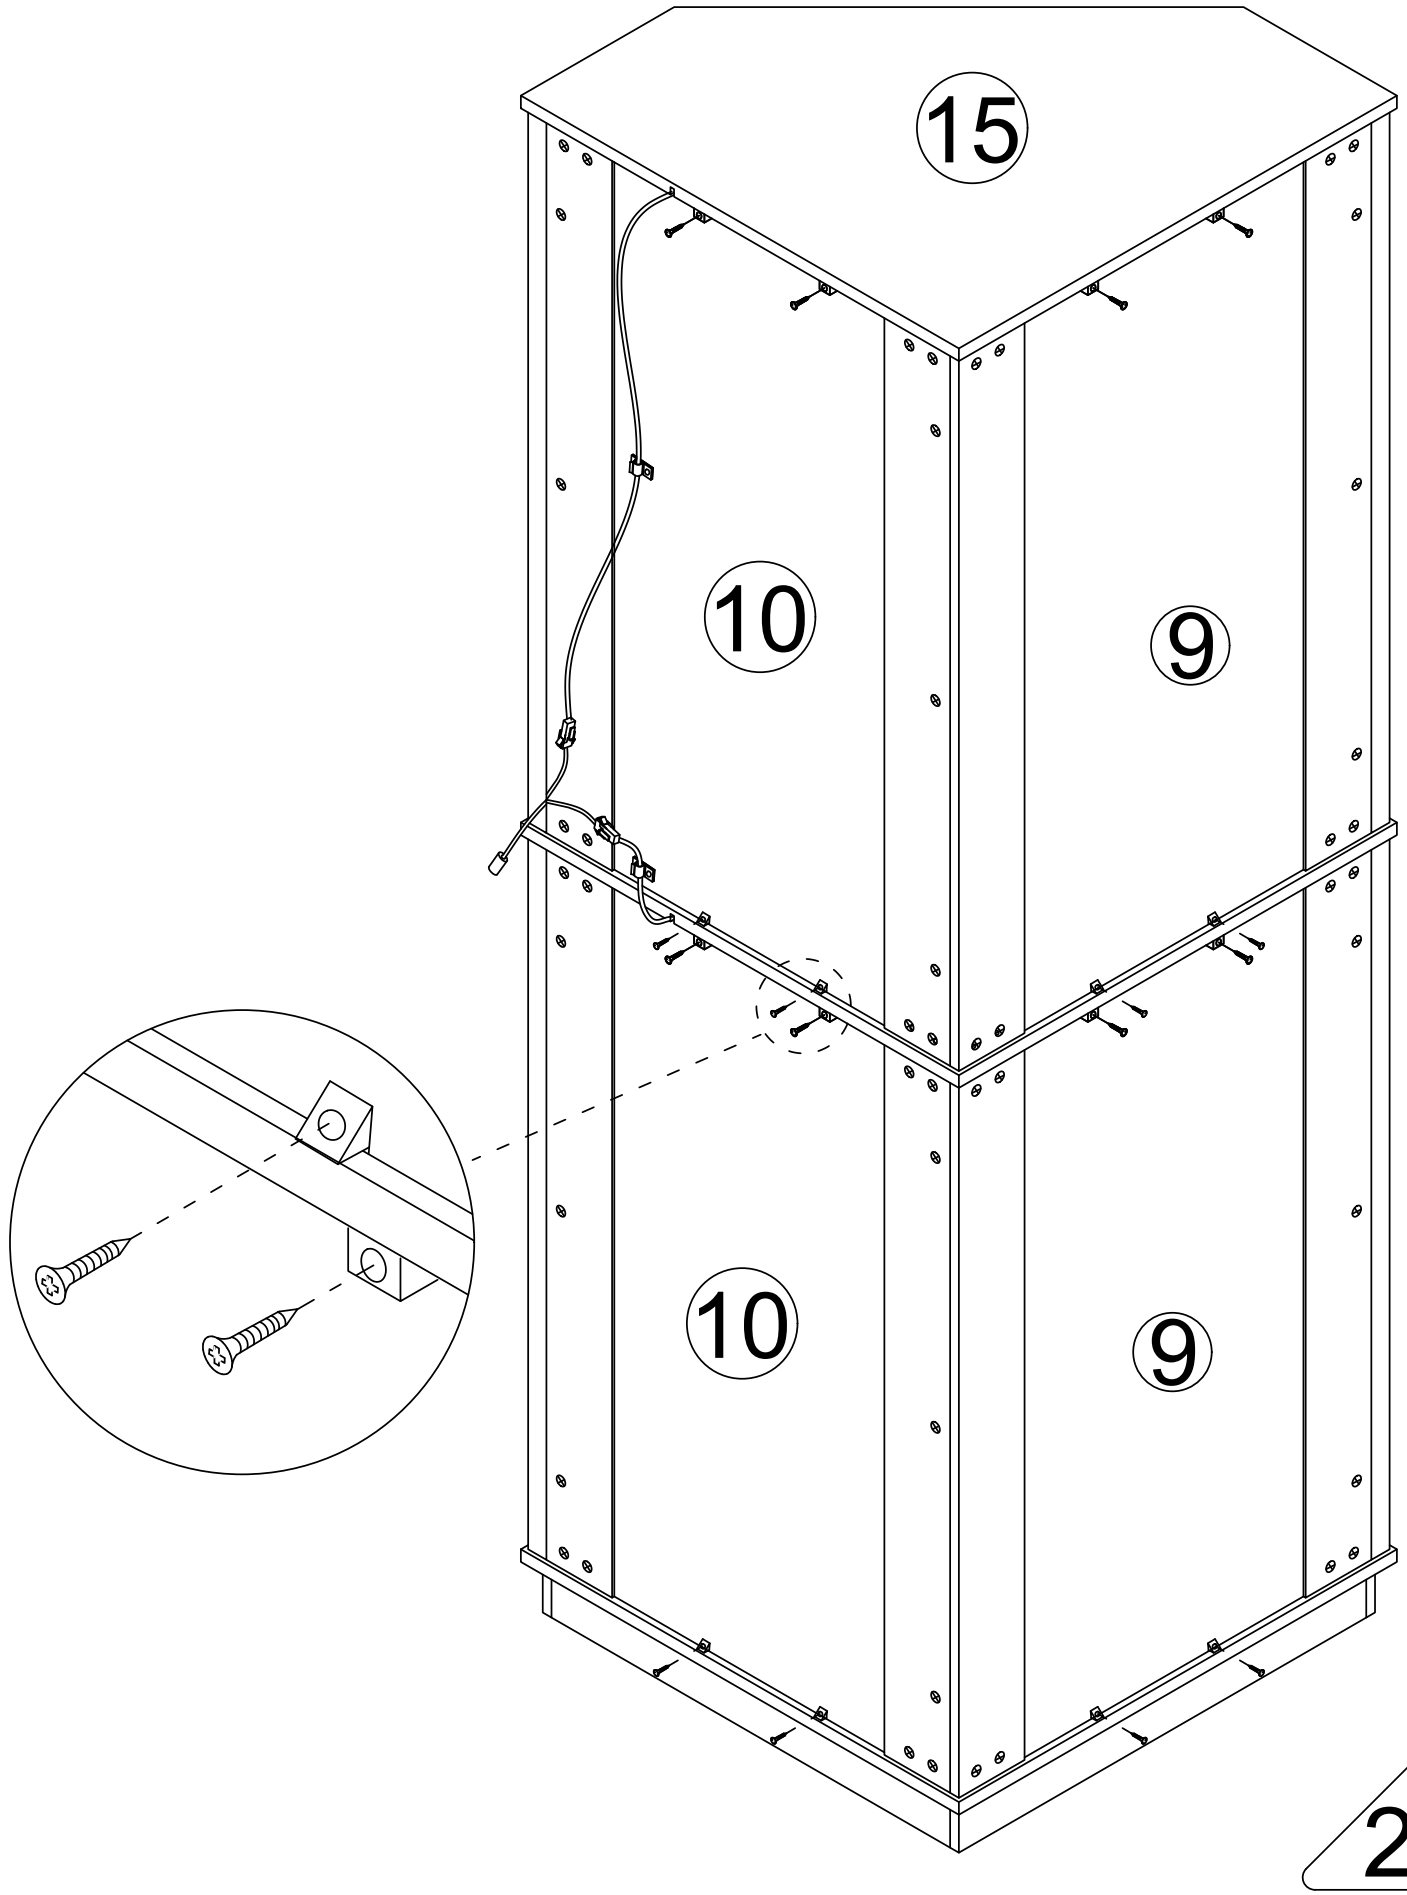



Step 27

G



x24

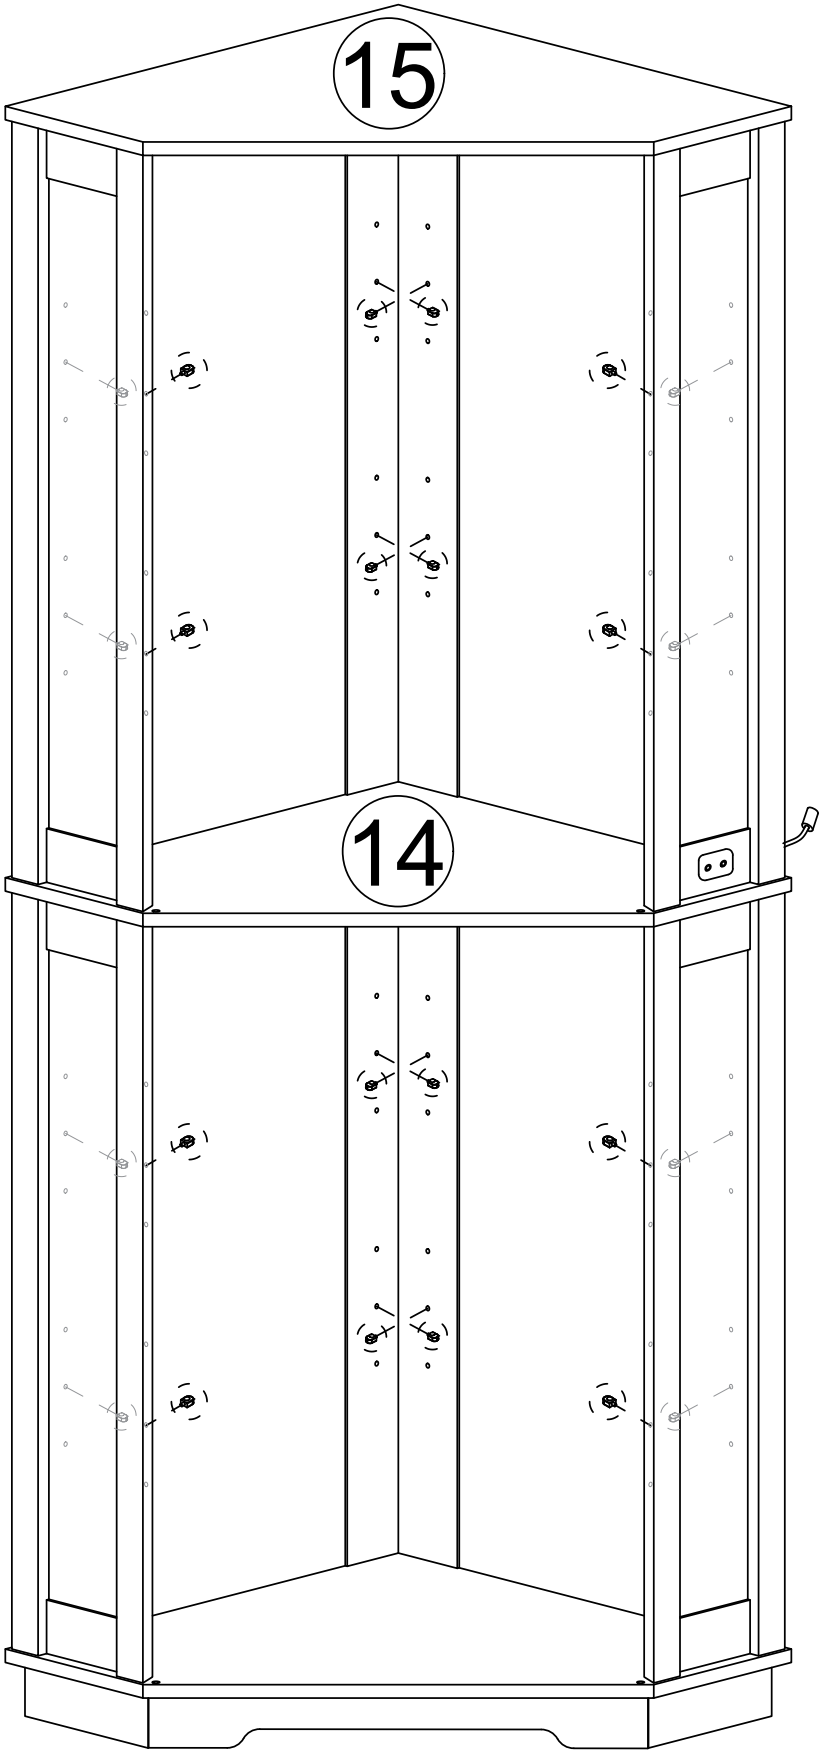


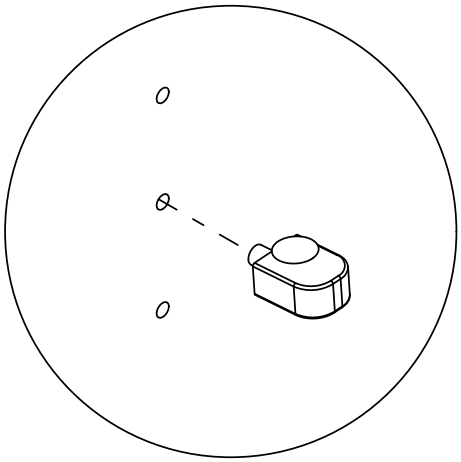


It can be adjusted up and down.

Step 28


Place the glass plate at an appropriate angle and insert it into the installation.

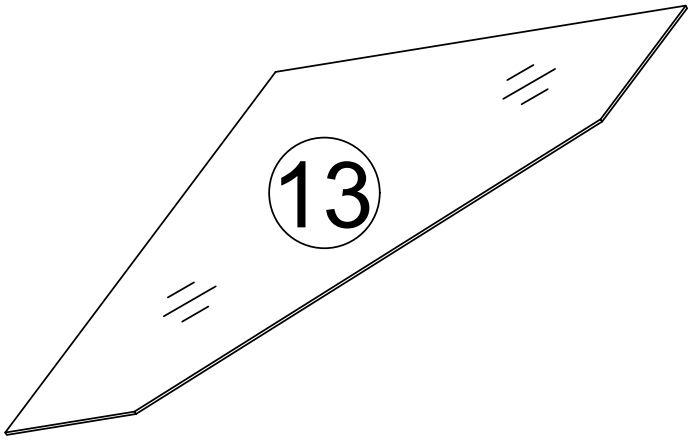

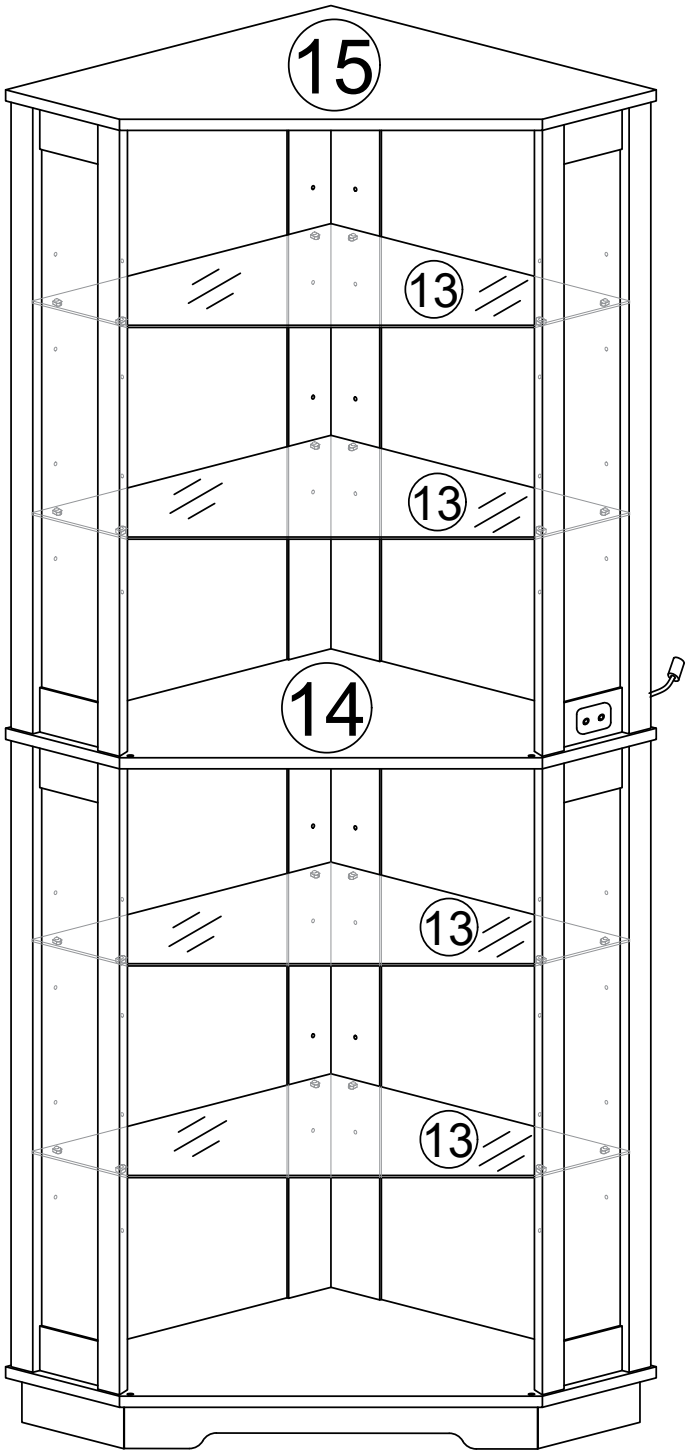


Step 29


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

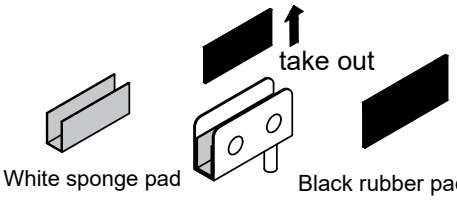


Ⓓ x2



x2



Left

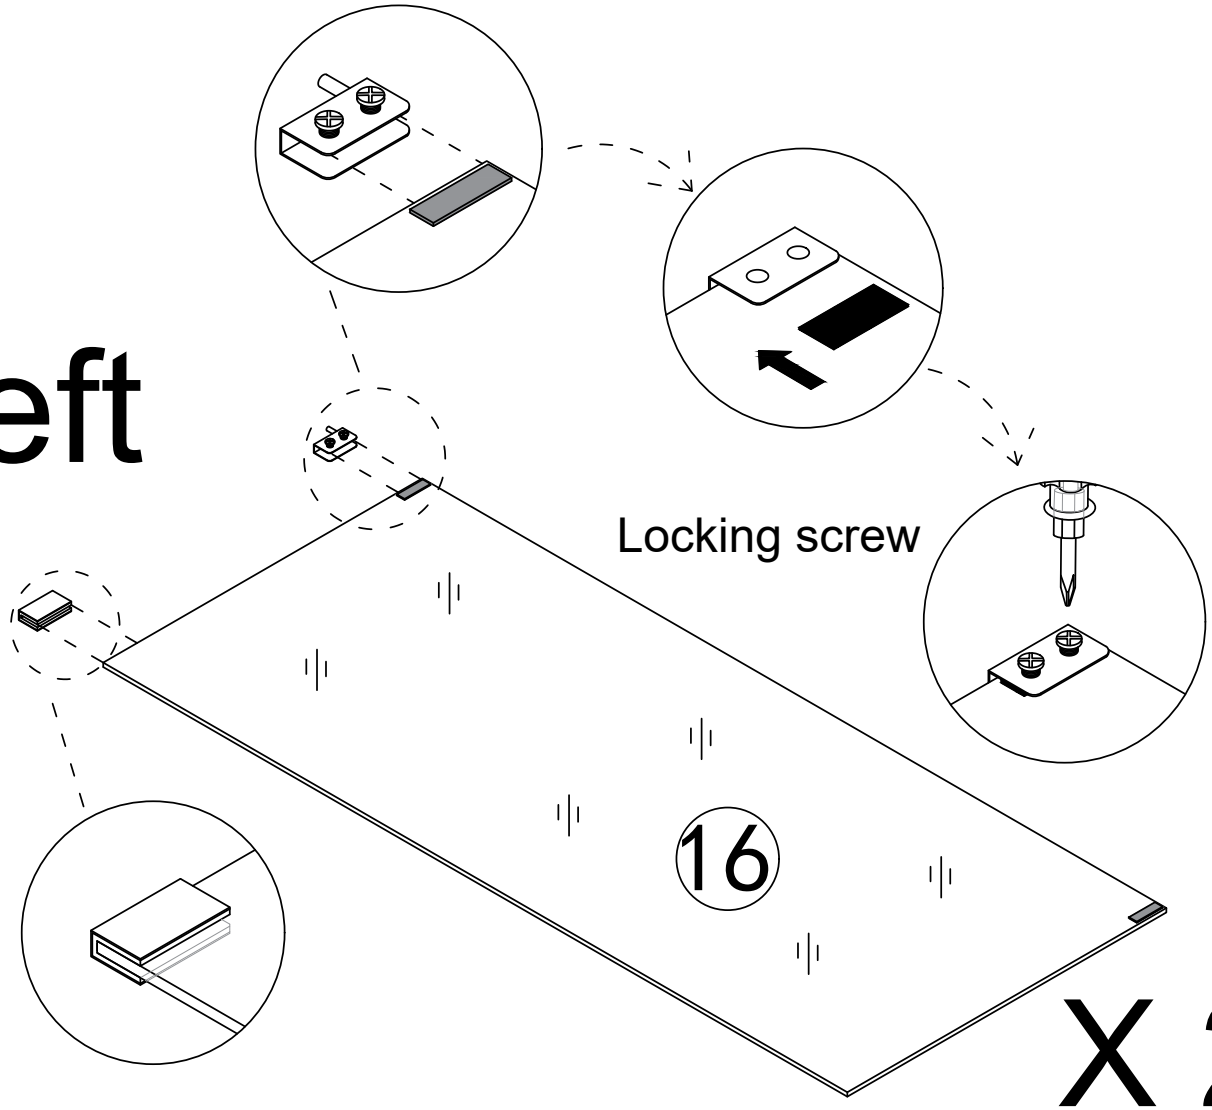



X 2

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 30




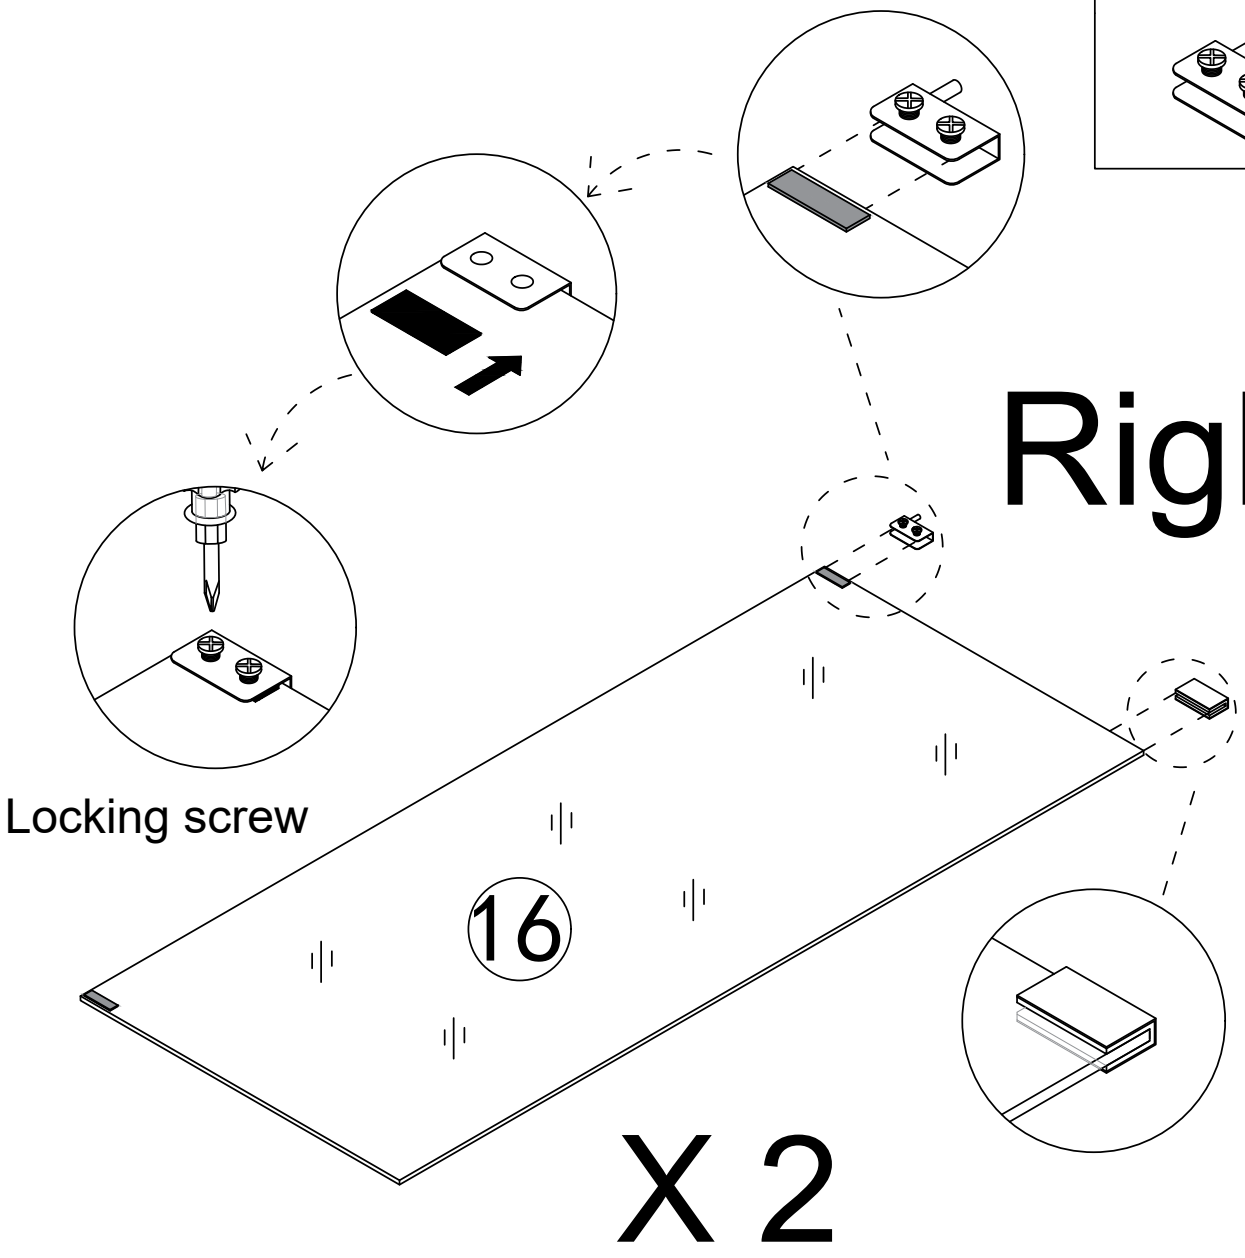


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 31



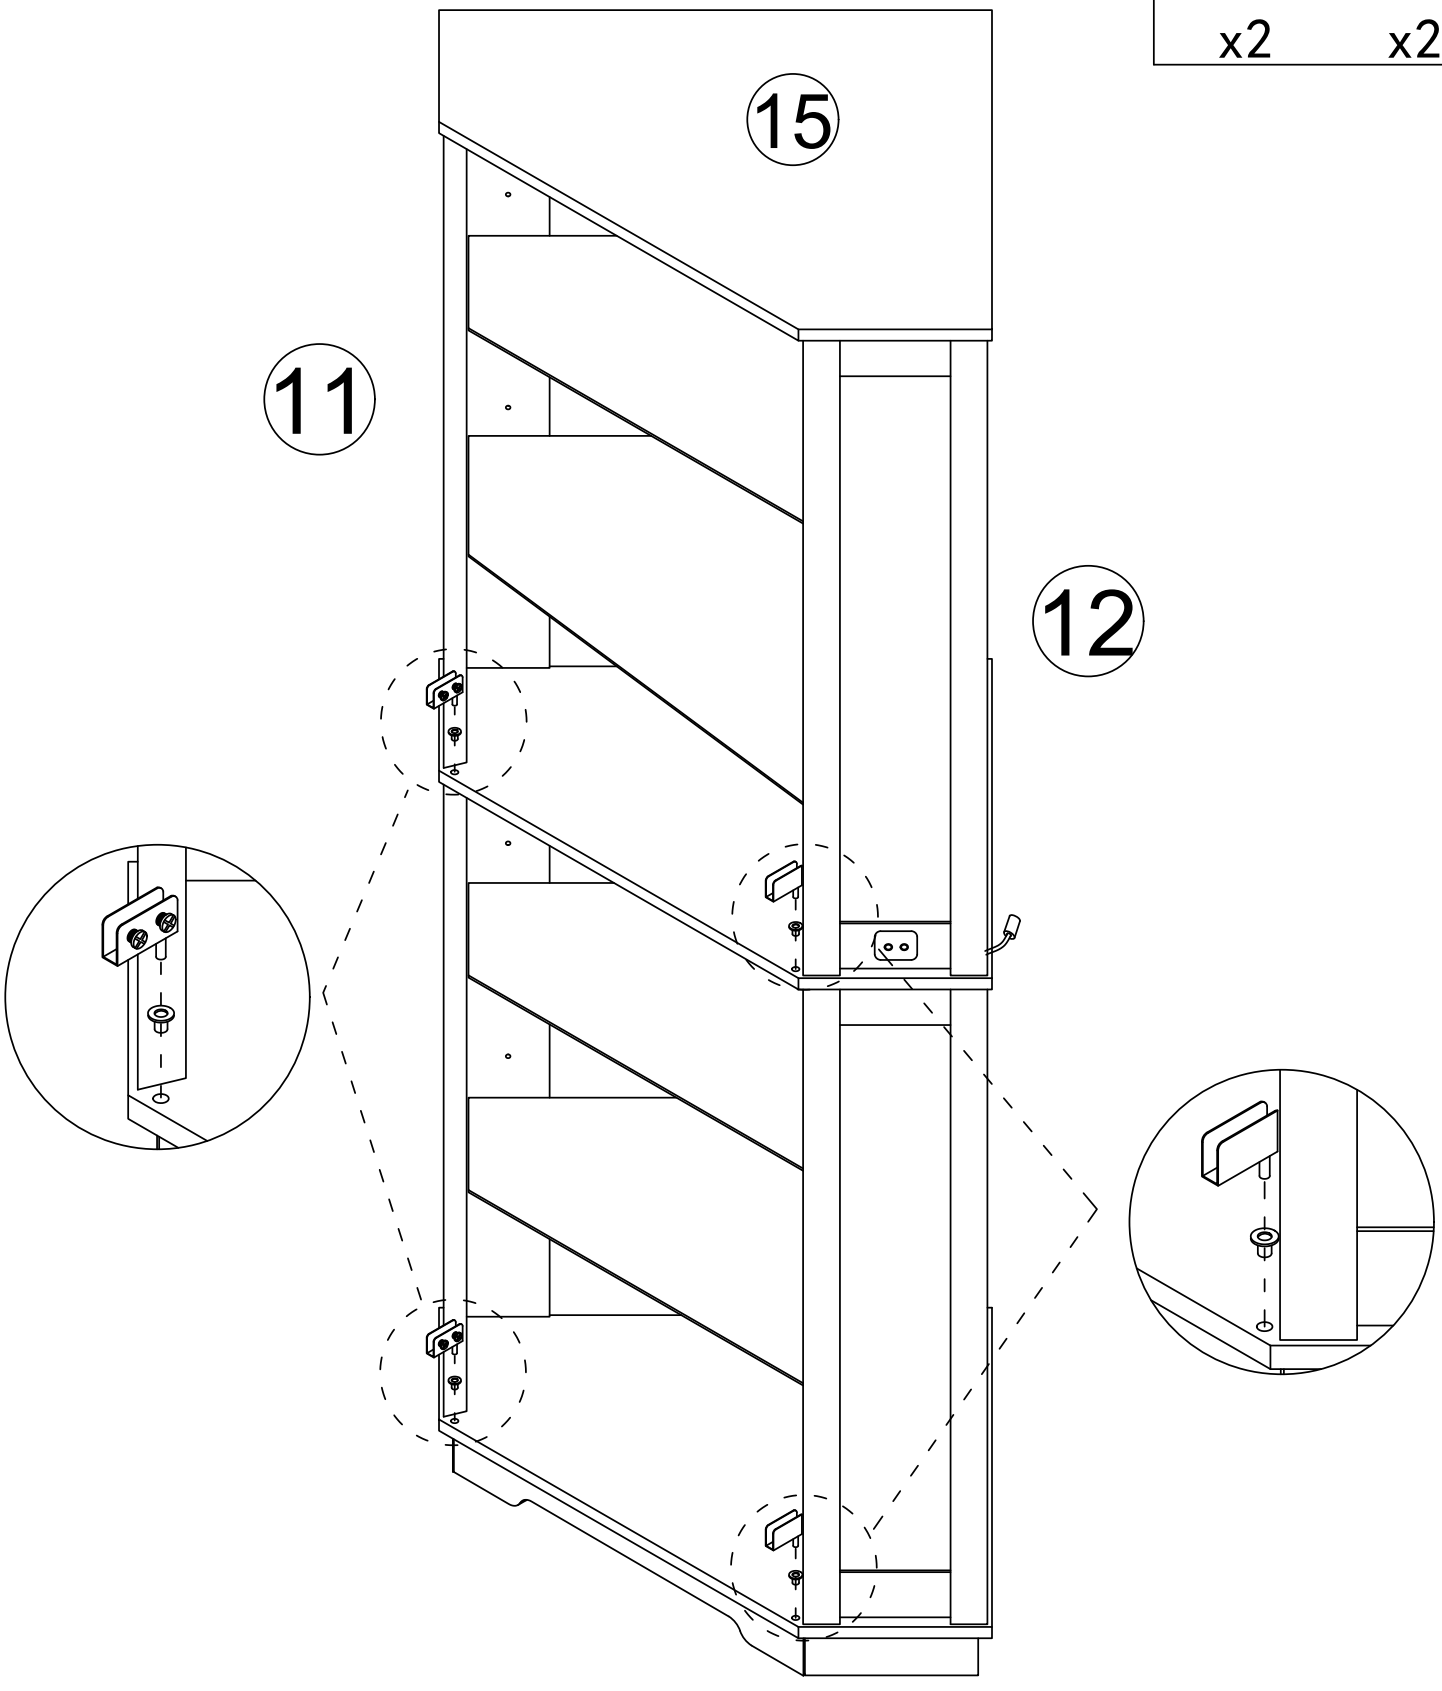


Step 32


Pay attention to the direction of the door hinge during installation

D x4


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first



second

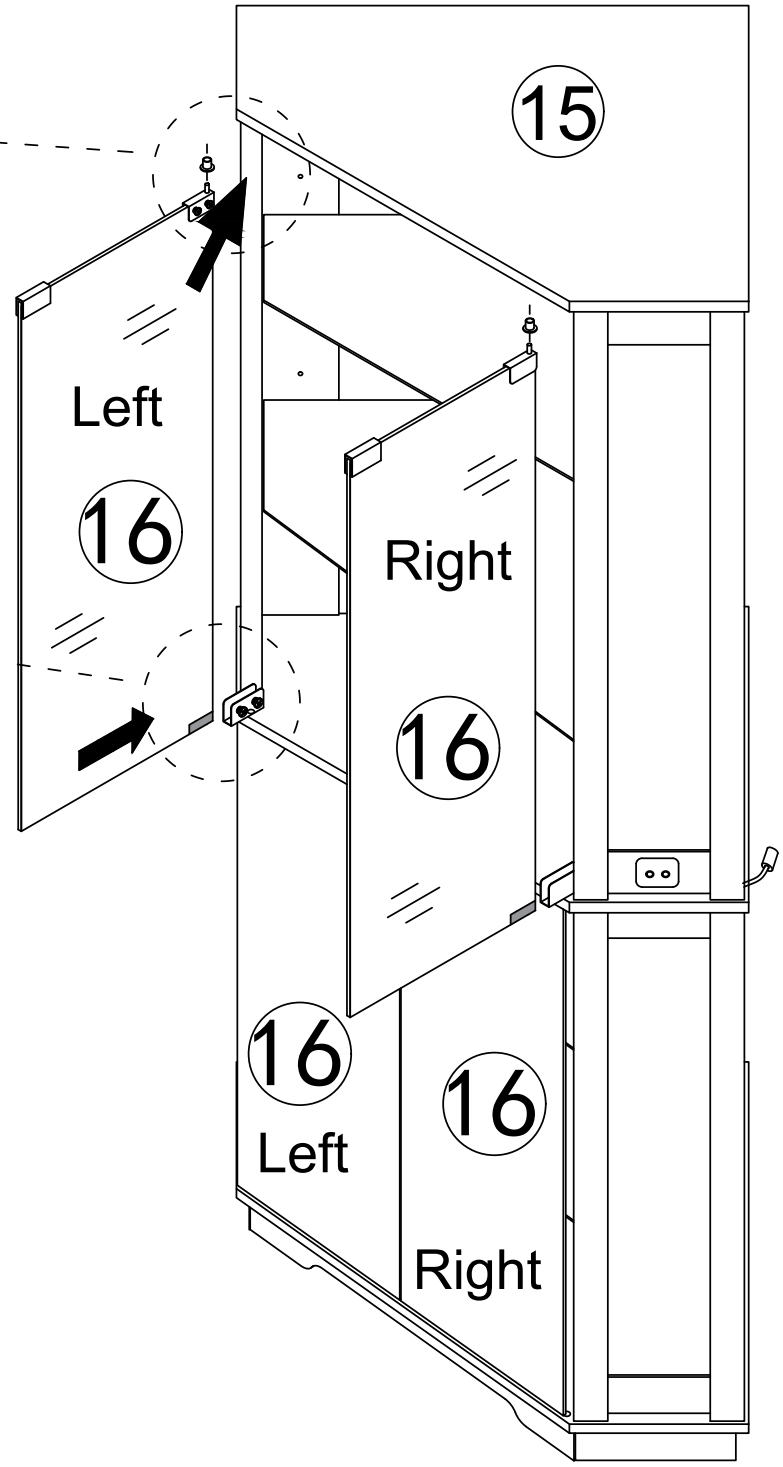

After installing the glass door, place the black gasket on the side where the screws are installed




third


Locking screw

Step 33


The rebound device automatically opens and closes by pressing

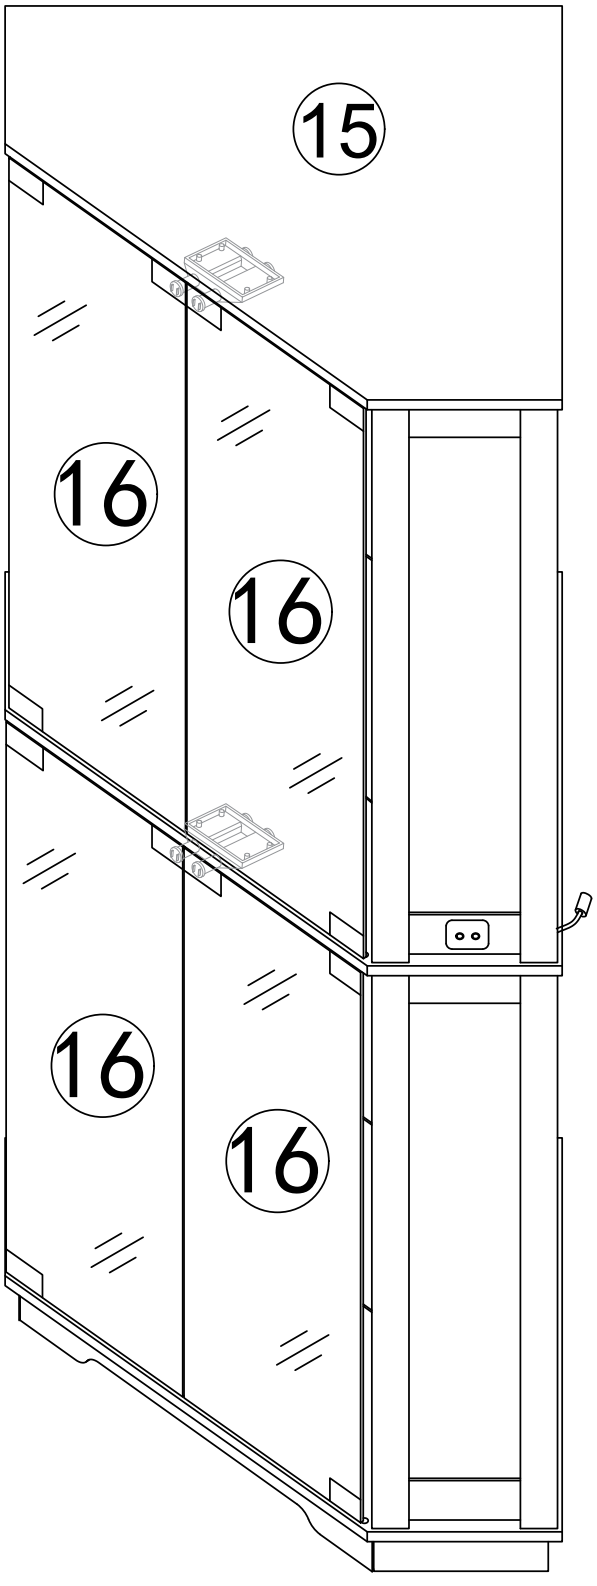


Open the glass door

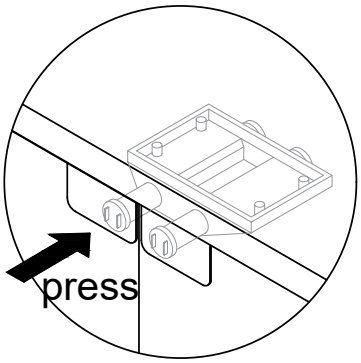


Close the glass door

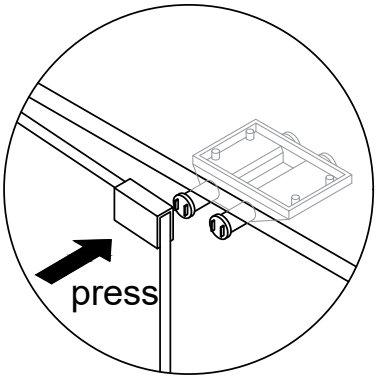

Step 34




x1

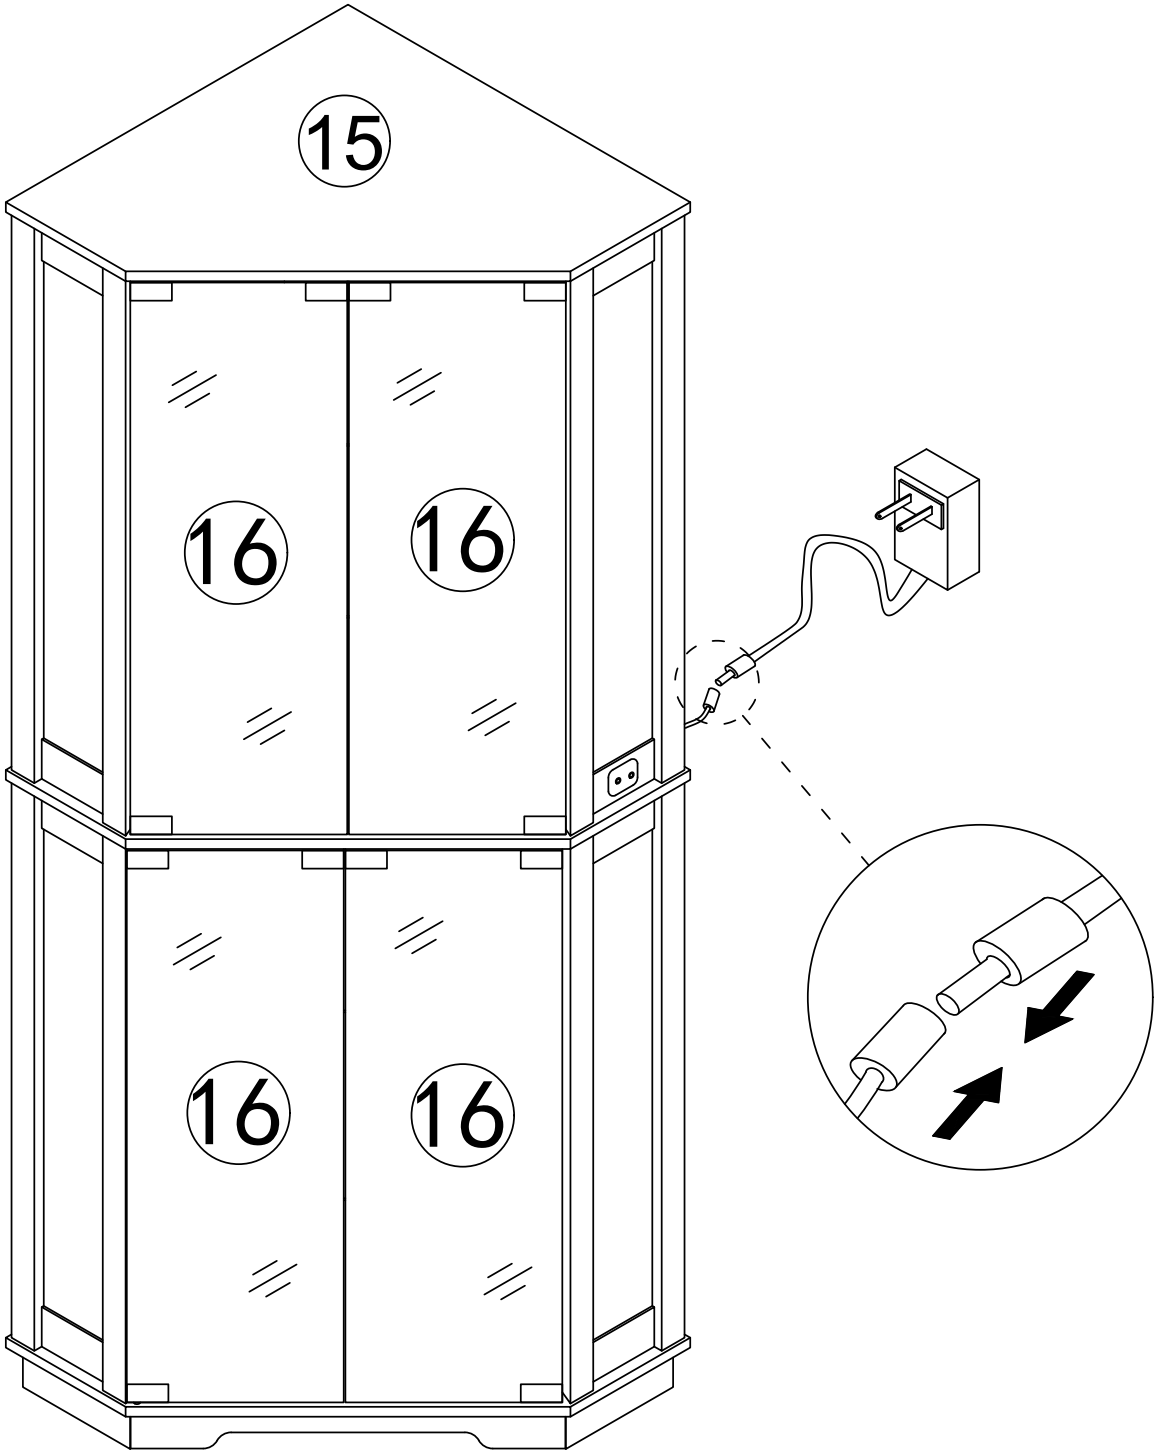


Step 35


3.5x14mm




H x2 x2 x2



Install the anti fall hardware on the cabinet as shown in the picture first

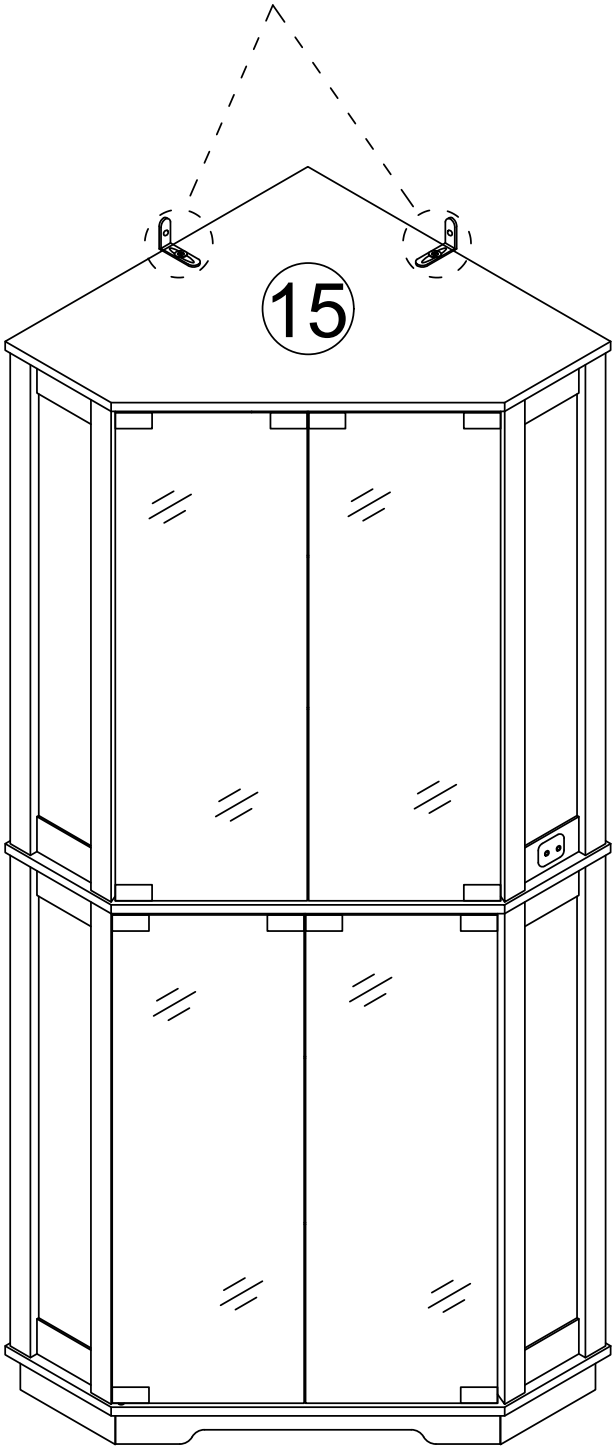


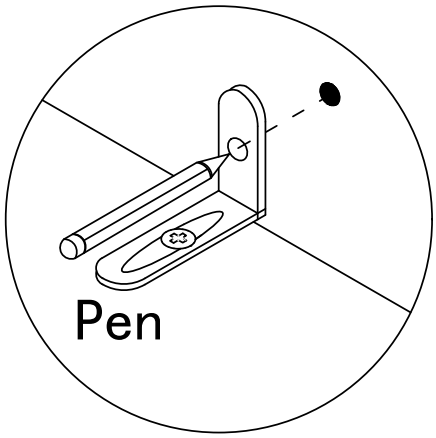


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 36

use a ruler to measure theapproximate height of the producton the wall, and then mark it witha pencil.

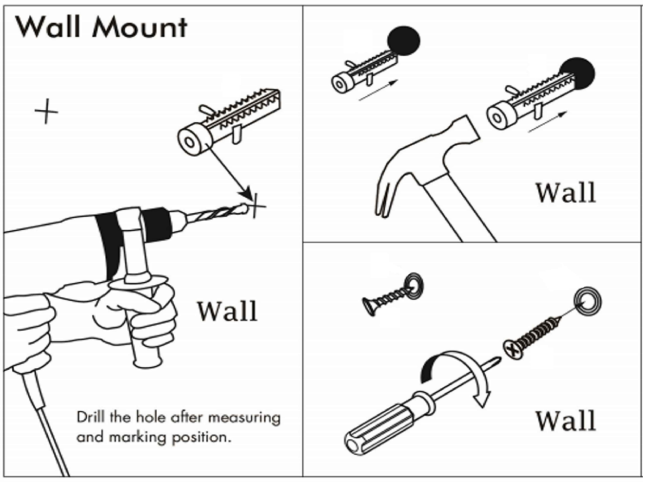


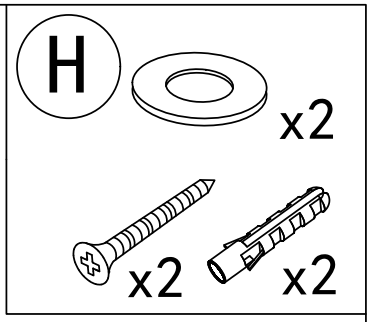


Put the expansion bolt into the hole.


Pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.

Use a tape drill to make holesin the wall that are suitable for theproduct screws.



4x45mm



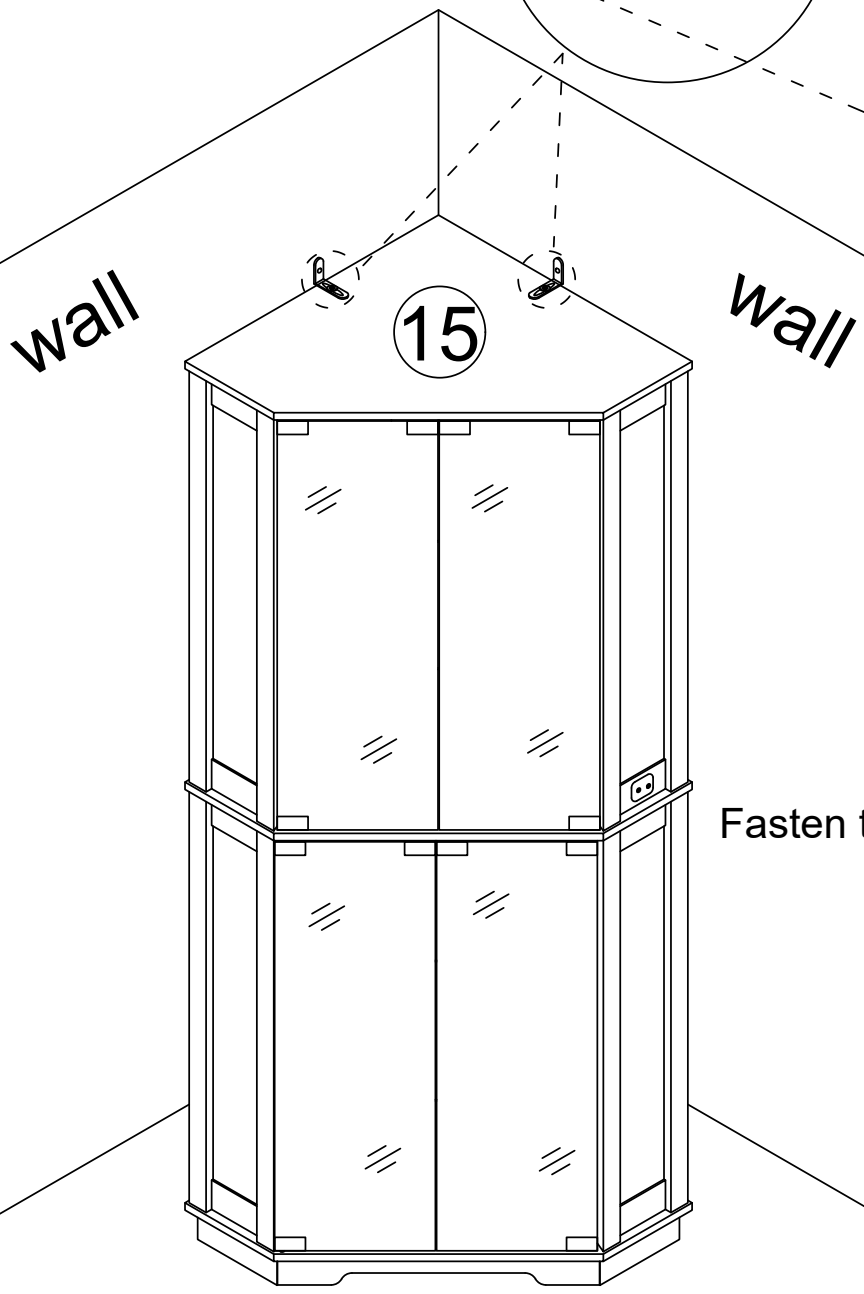

Fasten the cabinet to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

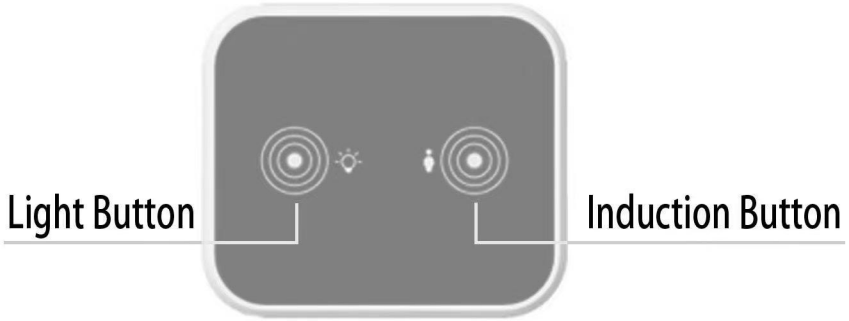

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.