


# Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



## Care and Cleaning

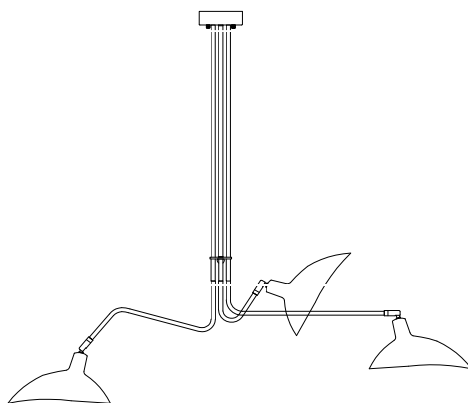











To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	G	Tubt w/ shade		1X
B	Lamp Body		1X	H	Tubt w/ shade		1X
C	Canopy Nut		2X	I	Allen Wrench		1X
D	Hex Nut		3X	J	Wire Nut		3X
E	Spring Washer		3X	K	Mounting Screw		2X
F	Tubt w/ shade		1X	L	Bulb		3X

# Installation


## Step 1

Unpack all parts from cartons carefully.  
Separate the Mounting Plate(A) from the Lamp Body(B) by removing the Canopy Nut(C) anti-clockwise.

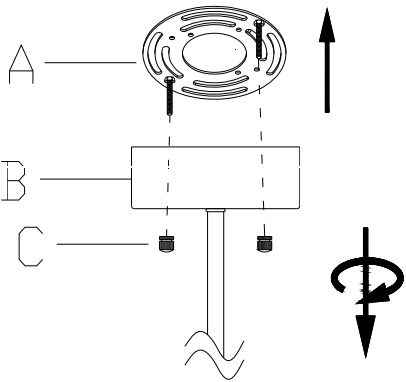


## Step 2

Insert each Tube w/shade(F,G,H) through the hole of the canopy of the Lamp Body(B). Place Spring Washer(E) onto each threaded nipple of the tube, fix each tube in place by turning the Hex Nut(D) with Allen Wrench(I) clockwise till tight as diagram.

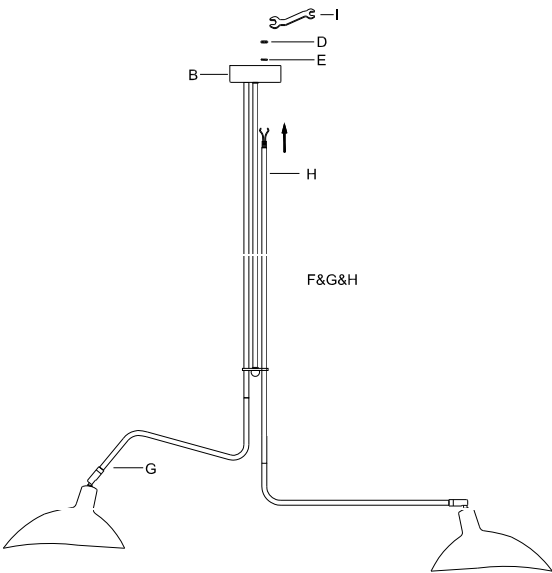


## Step 3

Insert the J-box wires through the center opening of Mounting Plate (A). Attach the Mounting Plate (A) onto the J-box and secure it by turning the 2 Mounting Screws (K) clockwise until tight.

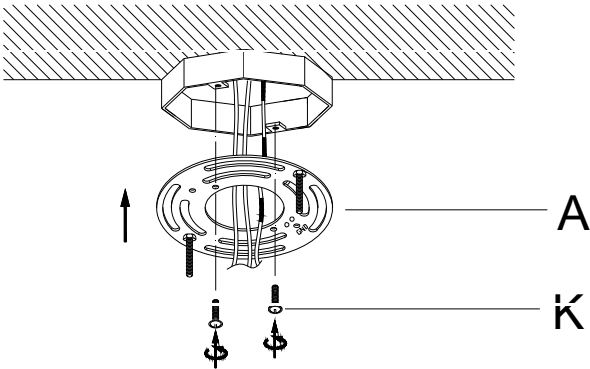


## Step 4 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



## Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


## Step 5

Position the canopy of the Lamp Body(B) over the Mounting Plate(A), fix the Lamp Body(B) by rotating the Canopy Nut(C) clockwise until secure. Do not over tighten.

Insert the bulb(L) into the socket until secure.

**DO NOT EXCEED THE SPECIFIED WATTAGE.**

**PLEASE USE TYPE "A" BULB MAX 60-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE ARE 3\*9W LED BULBS IN THE BOX.**

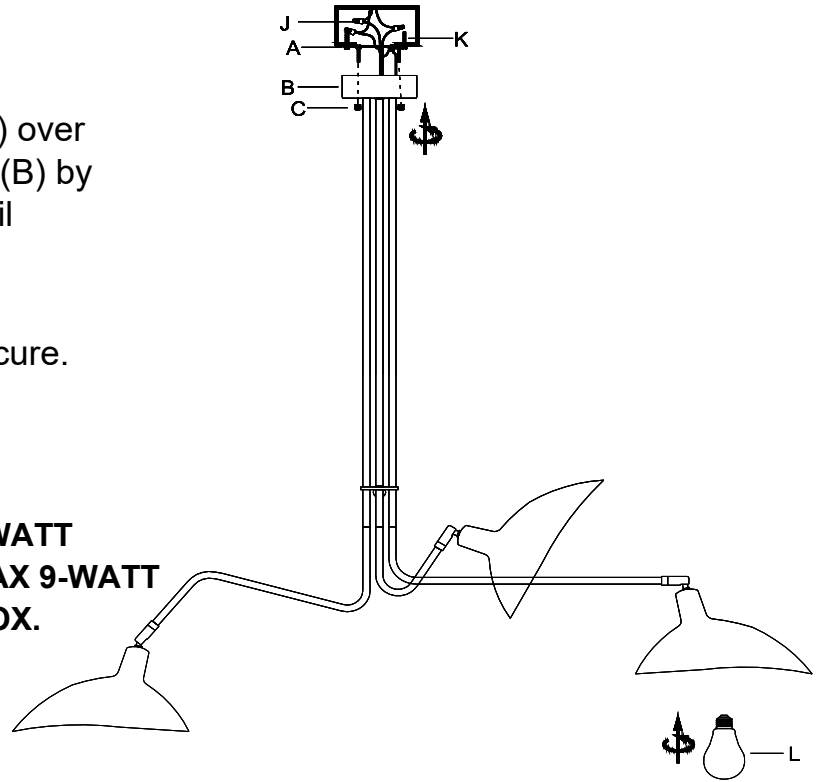

## Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP