

INSTALLATION INSTRUCTIONS

For Chandelier

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Install all thread (F) to crossbar (A) and use hex nut (D) and key washer (E) to fix tightly. Note: The length of all thread (F) into crossbar (A) may be adjusted if necessary.
4. Attach crossbar (A) to junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of crossbar (A) marked "GND" must face out.
5. Install canopy loop (G) onto all thread (F).
6. Run the wire through tube (M) and thread onto all thread of the fixture body (O).
7. Adjust chain (I) to the desired hanging height and use a pair of proper chain pliers (not included) to remove and discard excess chain.
8. Attach one quick link (H) to the end of chain (I) and then to fixture loop (L). Slip the lock collar (K) and canopy (J) over chain (I) and allow them to rest on fixture loop (L). Attach the other quick link (H) to the other end of chain and then to canopy loop (G).
9. Carefully feed the wires through chain (I), lock collar (K), canopy (J), canopy loop (G) and all thread (F).

CONNECTING THE WIRES (Fig.2)

10. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the green screw (B) provided.
11. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

12. Raise the canopy (J) over canopy loop (G) and secure the canopy to ceiling with lock collar (K).
13. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Insert the screw (T) with plastic washer (S) into the glass (R) hole and lock it with the rod (P) and plastic washer (S) provided, so the glass (R) is fixed on rod (P). Thread the other side of rod (P) onto fixture body (O) tightly as shown in Fig.1. Repeat the same process for the other rods. Note: Install the first- and third-layer rod (P), then install the second layer rod (Q). (The first layer rod length 149mm has 12pcs. The second layer rod length 159mm has 12pcs. The third layer rod length 149mm has 12pcs.)

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.


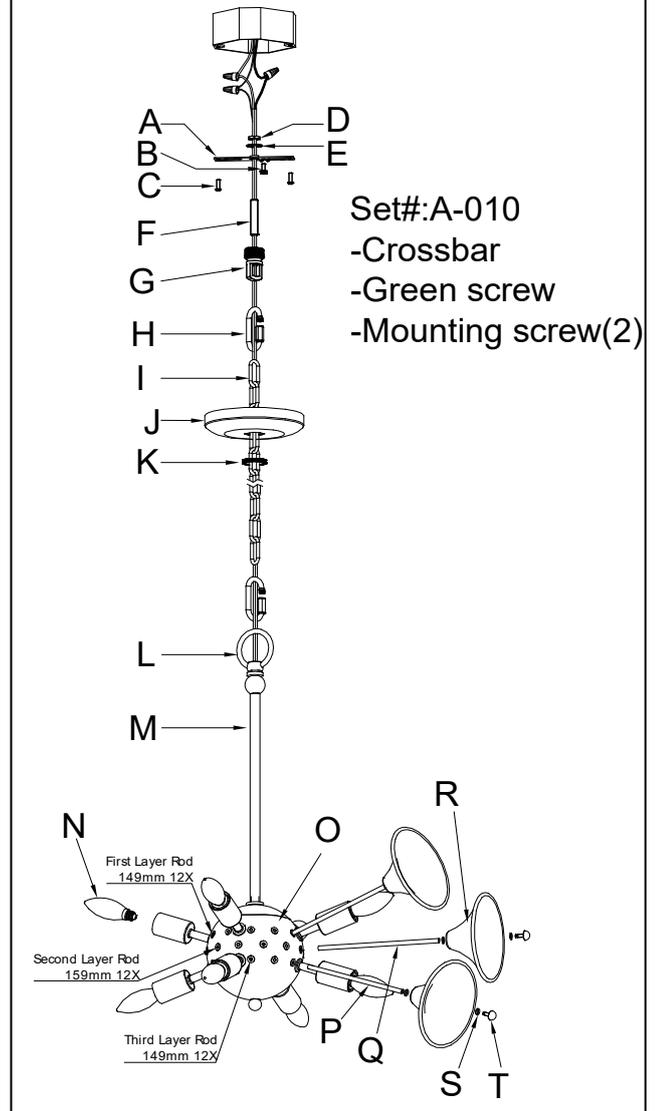


Fig.2



Notice: It is important to use proper chain pliers (not included). To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

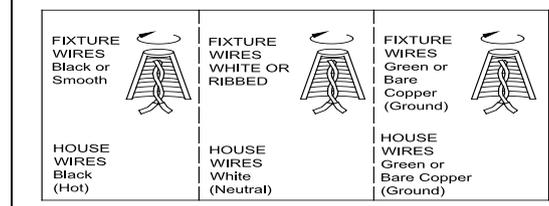