


OUTDOOR STEEL LOUNGE CHAIR

ASSEMBLY INSTRUCTIONS

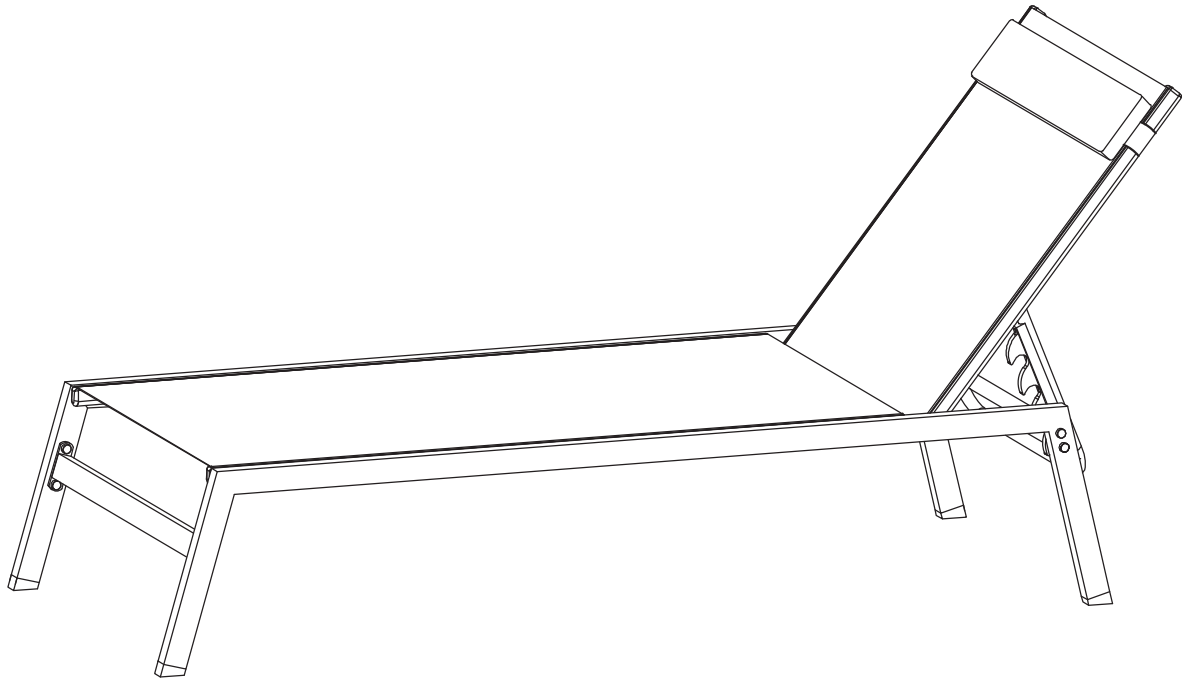


ASSEMBLY INSTRUCTIONS

- Prior to assembly, make sure to lay out and identify all of the parts listed below in the parts list.
- Tighten all nuts and bolts securely. All bolts should be hand tightened before use. Never use power tools or excessive force during assembly and tightening of bolts.

TOOLS REQUIRED:



ALLEN WRENCH




SCREWDRIVER















(PROVIDED)

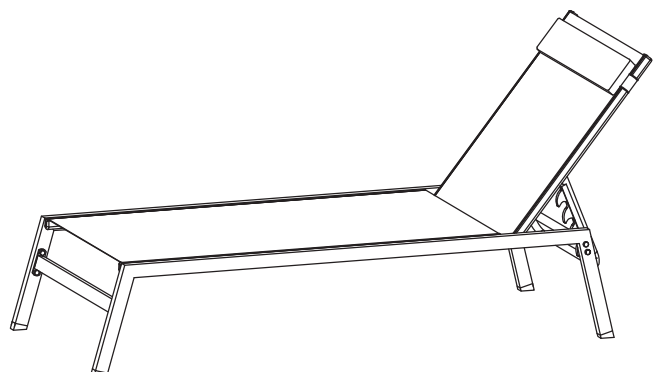Warning:


1. Do not exceed 360lbs weight limit.
2. Make sure the lounger is placed on a solid level surface.

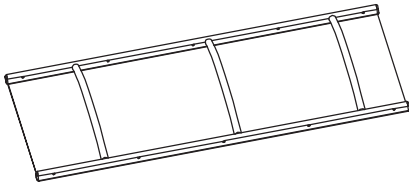


Part list

<div><div>A</div><div>Back</div><div></div><div>2X</div></div>	<div><div>B</div><div>Main Seat Frame</div><div></div><div>2X</div></div>		
<div><div>C</div><div>Left Leg</div><div></div><div>2X</div></div>	<div><div>D</div><div>Right Leg</div><div></div><div>2X</div></div>		
<div><div>E</div><div>Support Bar</div><div></div><div>2X</div></div>	<div><div>F</div><div>Support Column</div><div></div><div>2X</div></div>		
<div><div>M</div><div>Head Cushion</div><div></div><div>2X</div></div>	<div><div>G</div><div>Bolts</div><div></div><div>M6X30</div><div>4X+1X</div></div>		
<div><div>H</div><div>Bolts</div><div></div><div>M6X30</div><div>4X+1X</div></div>	<div><div>I</div><div>Bolts</div><div></div><div>M6X16</div><div>8X+2X</div></div>		
<div><div>J</div><div>Bolts</div><div></div><div>M6X35</div><div>24X+4X</div></div>	<div><div>K</div><div>Plastic Cylinder</div><div></div><div>4X+1X</div></div>	<div><div>L</div><div>Allen Wrench</div><div></div><div>1X</div></div>	<div><div>Screwdriver</div><div></div><div>1X</div></div>


STEP -1 Connect 2 Legs (Parts C & D) using Support Column (Part F), and Bolt (H) and Bolt (G) as shown in diagram.

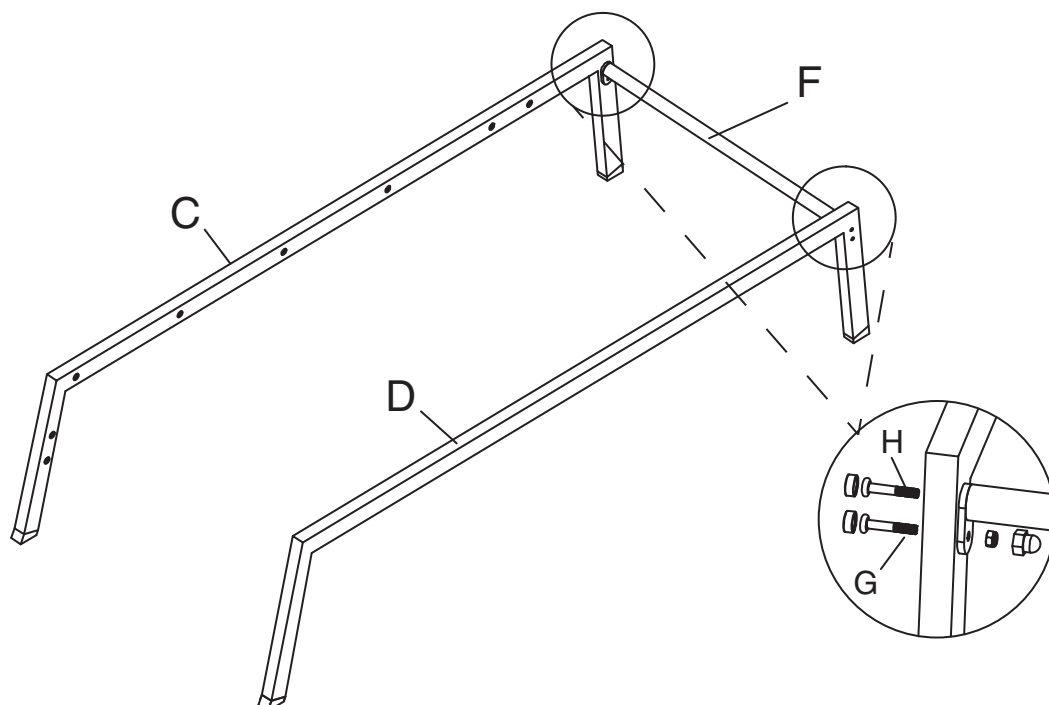


STEP -2 Connect 2 Legs (Parts C & D) using Support Bar (Part E) and Bolt (I) as shown in diagram.

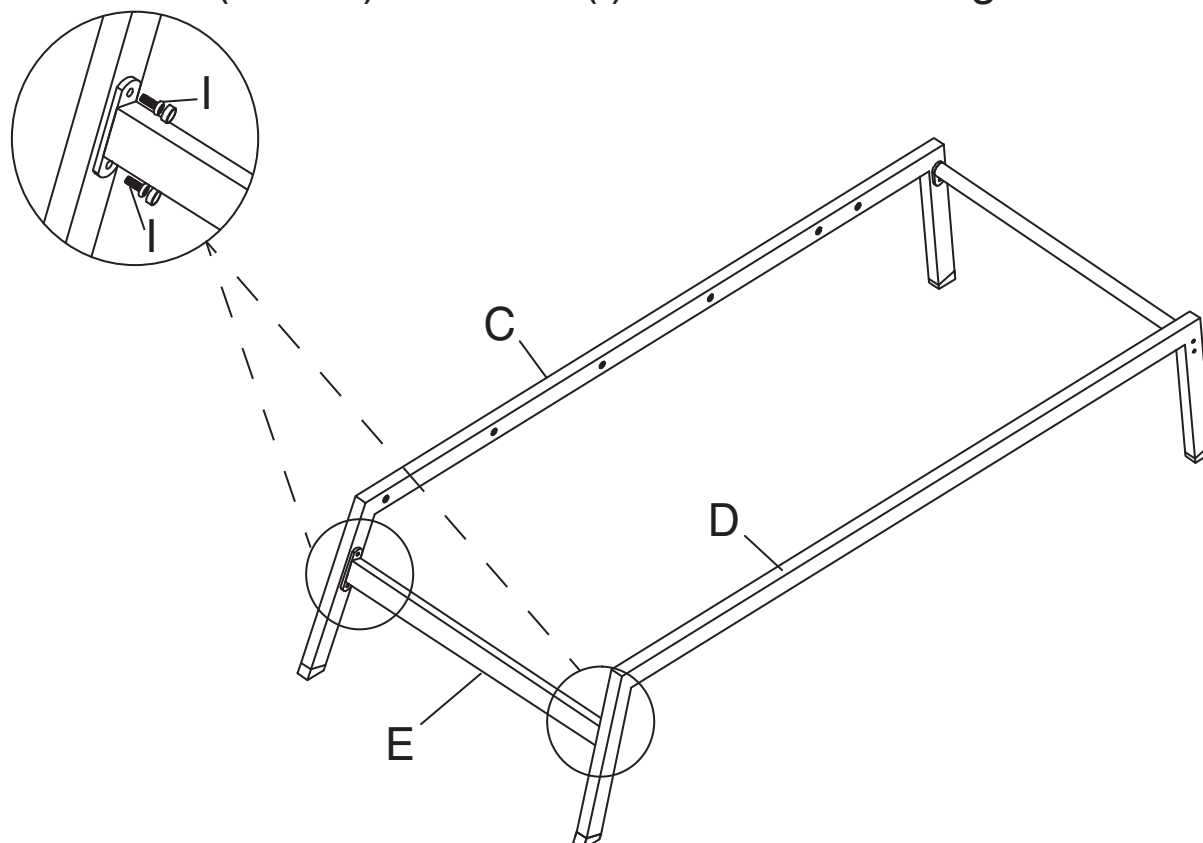


STEP -3 Attach Main Seat Frame (Part B) to Legs (Part C & Part D) using Bolt (J) as shown in diagram.

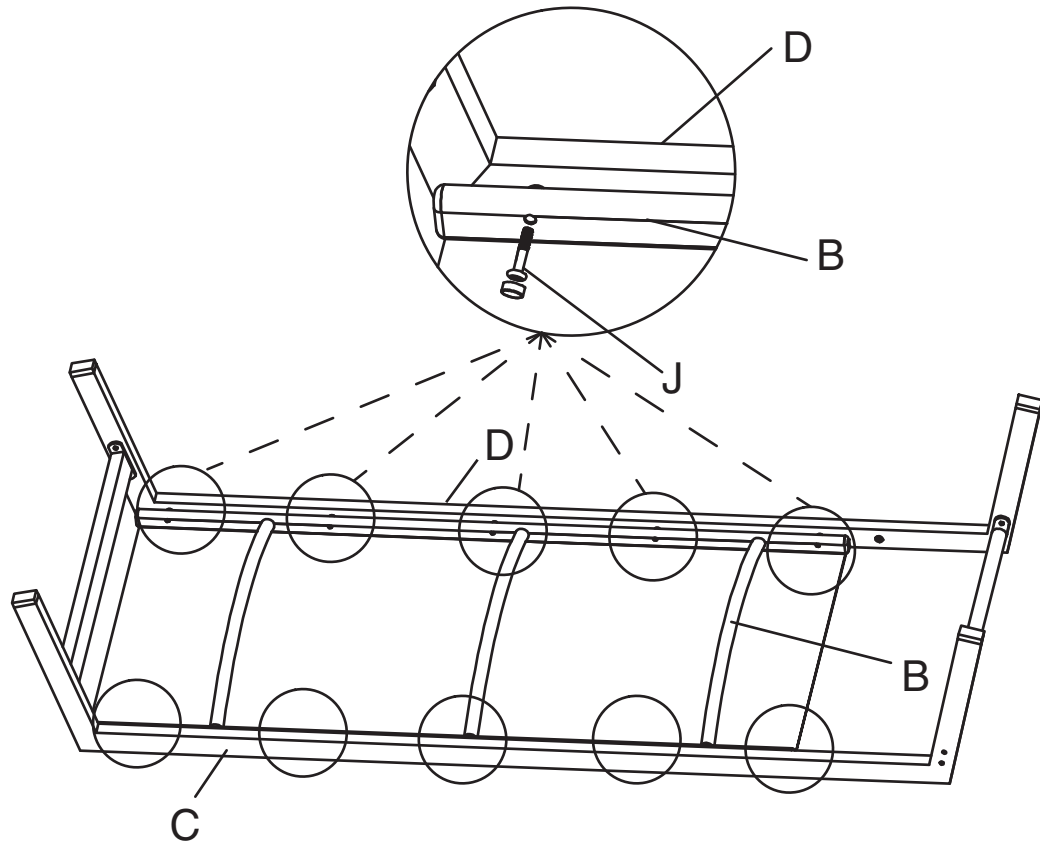

STEP -4 Link Back (Part A) to Legs (Part C & Part D) using Bolt(J) as shown in diagram..

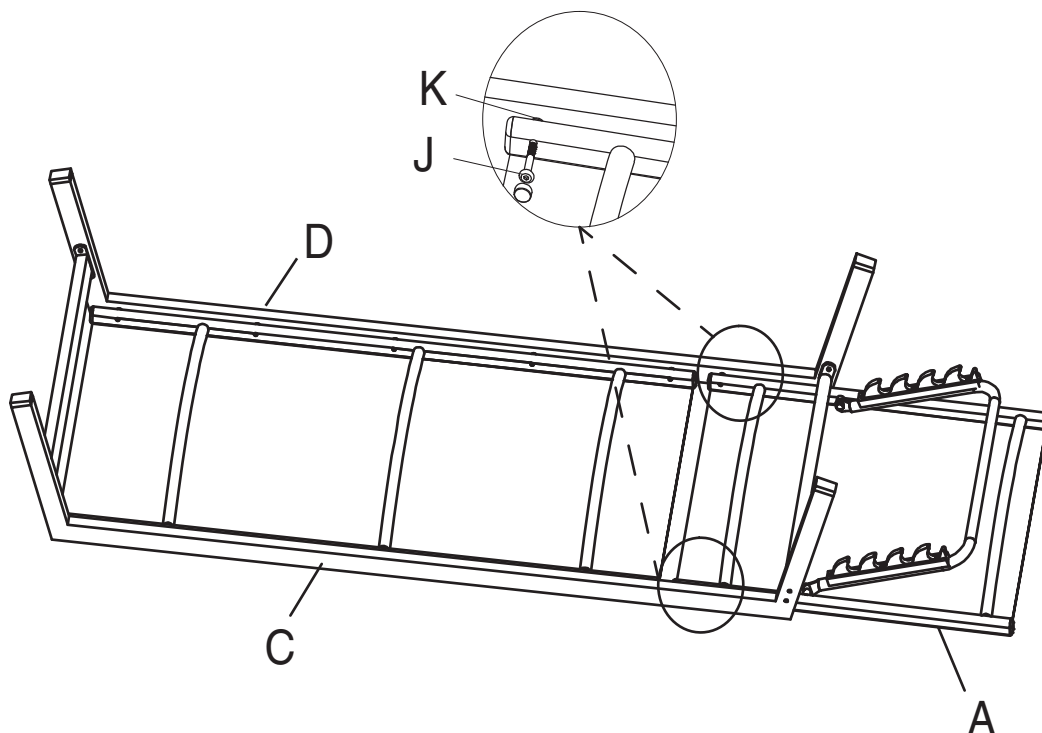

STEP-5 Check to make sure all screws are fixed tightly before use.

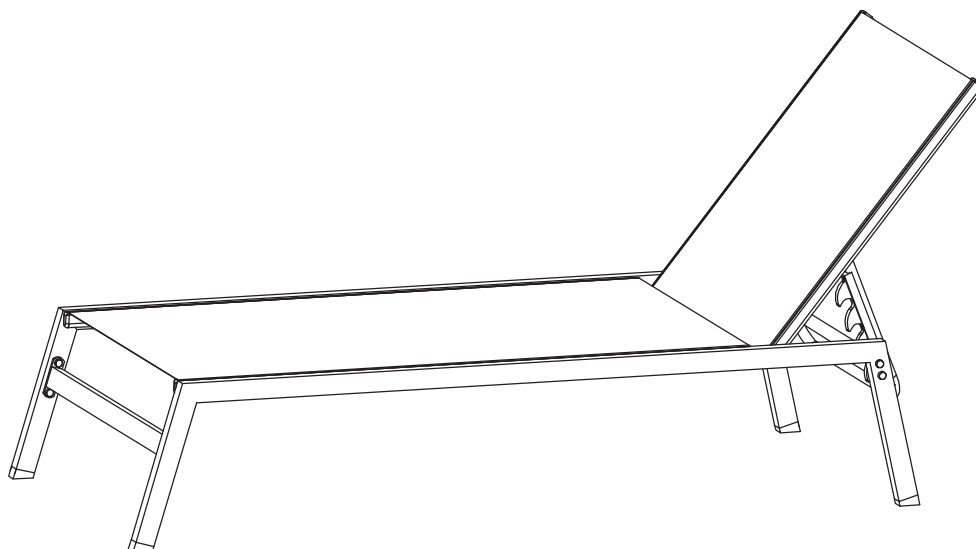

STEP-6 Put the Head Cushion (Part M) on the Back as shown in diagram.

