**PLEASE DO NOT RETURN TO THE STORE!**

Missing or damaged parts? Contact us for free replacements and get an extra 6-month warranty.

# ASSEMBLY INSTRUCTION:

### 1.Initial Tightening

Use a hex key (Allen wrench), not a power drill, to tighten each screw to about 50% before fully securing any of them. Fully tightening one screw too early may cause others to misalign.

### 2.Final Tightening

Once all parts are aligned, gradually and evenly tighten all screws using the proper tools.

### 3.Misalignment Fix

If some screws don't line up, loosen all screws to 50%, adjust the parts, and try again.

### 4.Stability Issue


If the item feels unstable, loosen all screws, adjust it on a flat surface, then retighten them evenly.

# Hardware Fittings


| Item No. | Reference Image | Description | Qty. | Extra Spare Parts Qty. |
|---|---|---|---|---|
| A |  | screw M8*35 | 12 | 1 |
| B |  | washer for M8 | 12 | 1 |
| C |  | spring washer for M8 | 12 | 1 |
| D |  | nut for M8 | 12 | 1 |
| E |  | Screw cap | 12 | 1 |
| F |  | Adjustable foot pads | 4 | 1 |

| Item No. | Reference Image | Description | Qty. | Extra Spare Parts Qty. |
|---|---|---|---|---|
| G |  | allen key for M8 | 1 | 0 |
| H |  | Spanner for M8 | 1 | 0 |
| I | | | | |
| J | | | | |
| K | | | | |
| L | | | | |

## Step1

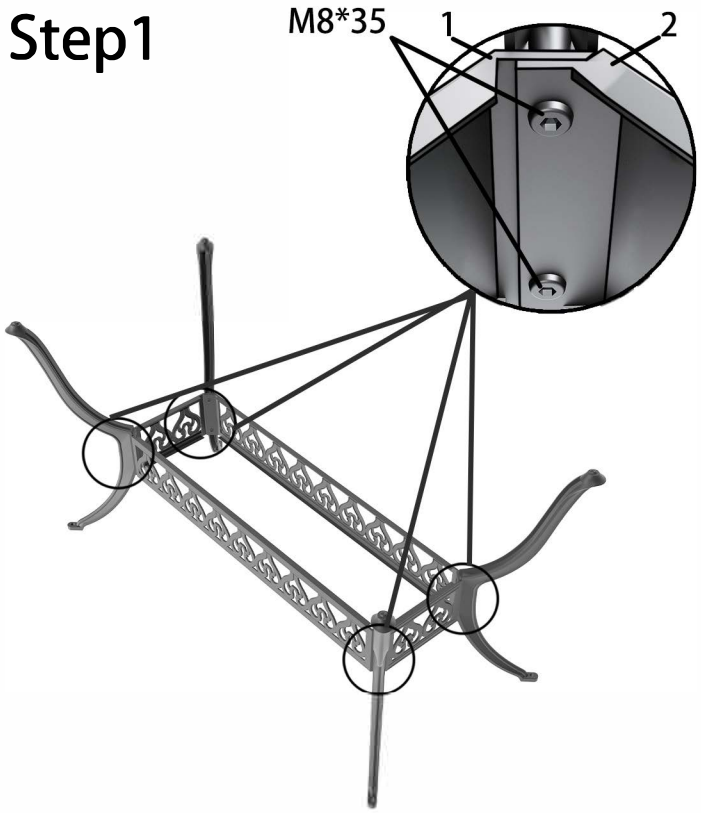


## Step2

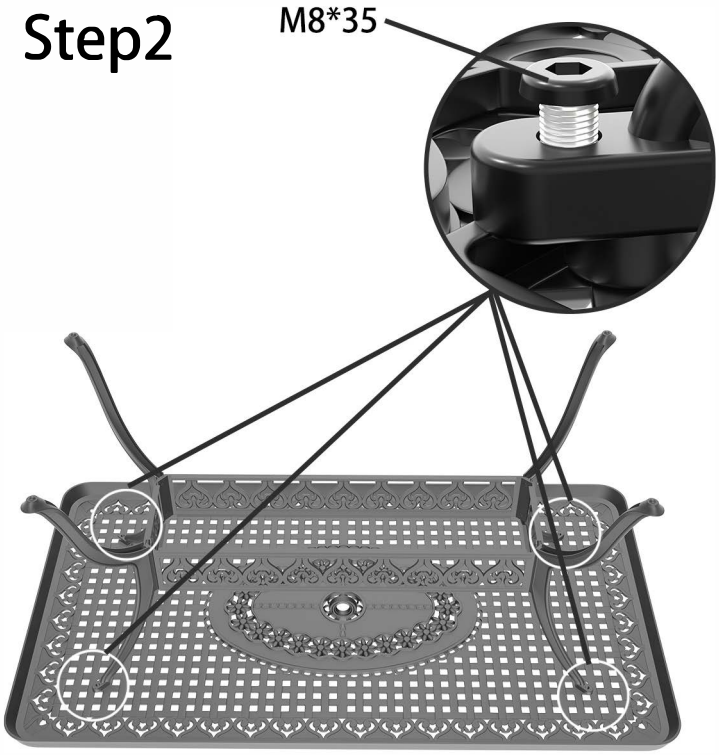

## PLEASE DO NOT RETURN TO THE STORE!

Missing or damaged parts? Contact us for free replacements and get an extra 6-month warranty.

# ASSEMBLY INSTRUCTION:

### 1.Initial Tightening

Use a hex key (Allen wrench), not a power drill, to tighten each screw to about 50% before fully securing any of them. Fully tightening one screw too early may cause others to misalign.

### 2.Final Tightening

Once all parts are aligned, gradually and evenly tighten all screws using the proper tools.

### 3.Misalignment Fix

If some screws don't line up, loosen all screws to 50%, adjust the parts, and try again.

### 4.Stability Issue


If the item feels unstable, loosen all screws, adjust it on a flat surface, then retighten them evenly.

# Hardware Fittings


| Item No. | Reference Image | Description | Qity. | Extra Spare Parts Qty. |
|---|---|---|---|---|
| A |  | screw M8*20 | 6 | 1 |
| B |  | screw M6*15 | 4 | 1 |
| C |  | spring washer for M6 | 4 | 1 |
| D |  | spring washer for M8 | 6 | 1 |
| E |  | washer for M6 | 4 | 1 |
| F |  | washer for M8 | 6 | 1 |
| G |  | Screw cap | 10 | 1 |

| Item No. | Reference Image | Description | Qity. | Extra Spare Parts Qty. |
|---|---|---|---|---|
| H |  | allen key for M8 | 1 | 0 |
| I |  | allen key for M6 | 1 | 0 |
| J | | | | |
| K | | | | |
| L | | | | |
| M | | | | |
| N | | | | |


### Step1

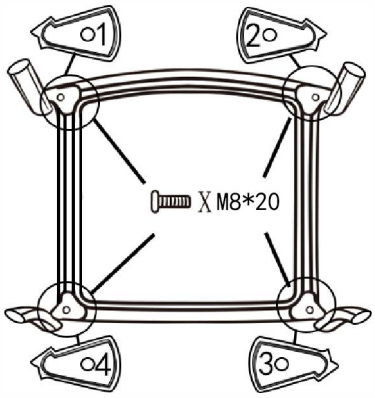



### Step2

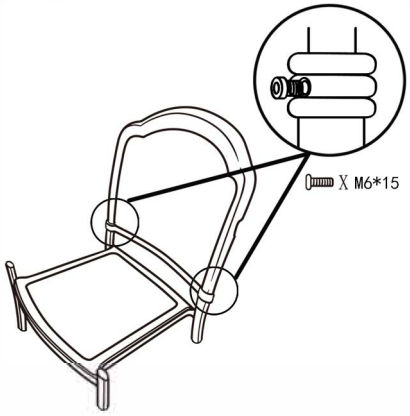



### Step3

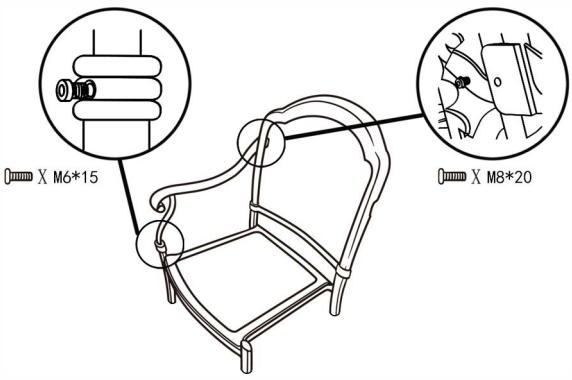



### Step4

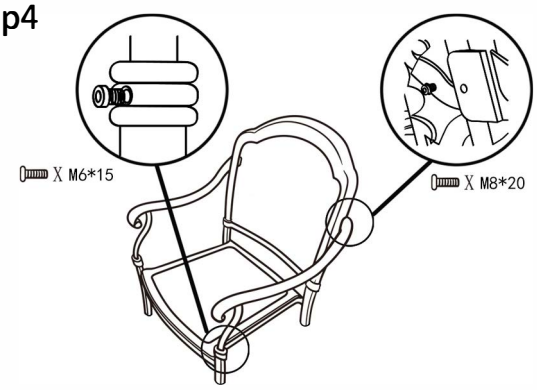


## Part List



A.
Bracket
1 pc.




B.
Connector
1 pc.

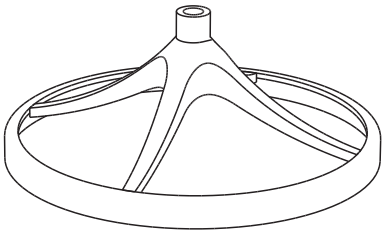

C.
Base
1 pc.

## Hardware List




M8x20
Bolt
4 pcs




Flat Washer
4 pcs




Spring Washer
8 pcs




Spanner
1 pc



Flat Washer
2 pcs



M8x35
Bolt
4 pcs




Nut
4 pcs

## Assembly Instructions 1/2

### IMPORTANT

- Use a soft cloth between these parts and the floor.
- Do not use power tools above 8 volts to assemble.
- Do not tighten all the bolts until each part is properly assembled.
- The unit must be level to work properly. Use the included adjustable levelers to level.
- Keep Wrench as the bolts may need to be tightened in the future.

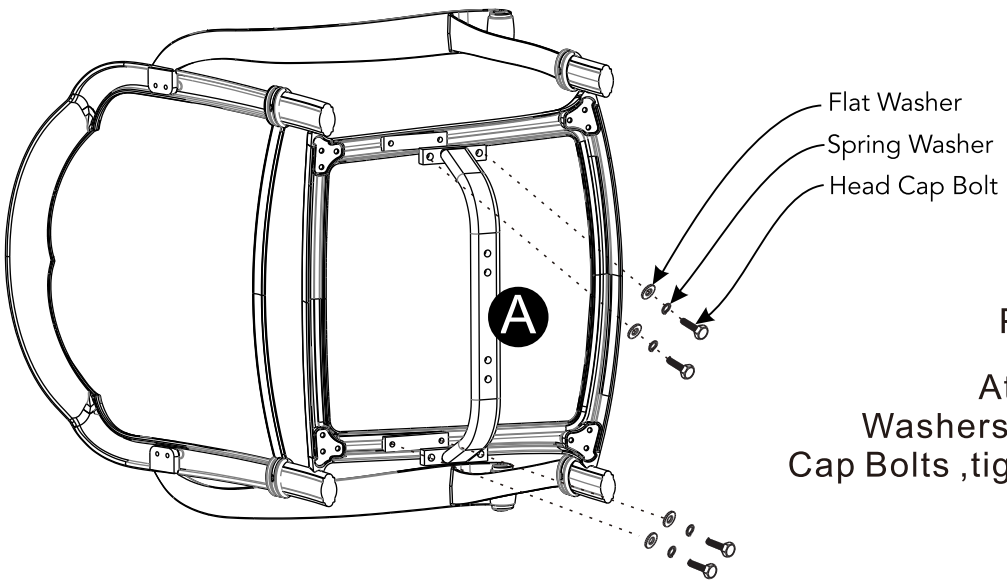


### STEP 1

Place frame on a soft cloth.

Attach unit to Frame with Flat Washers ,Spring Washers and Head Cap Bolts ,tightening bolts only halfway .

Tighten all Bolts .

# Assembly Instructions 2/2

## STEP 2

Attach unit to Connerctor (B) with Bolts, Flat Washers,Spring Washers and Nuts, tightening bolts and nuts only haflway. (See Figure 1)

Tighten all Bolts and Nuts.



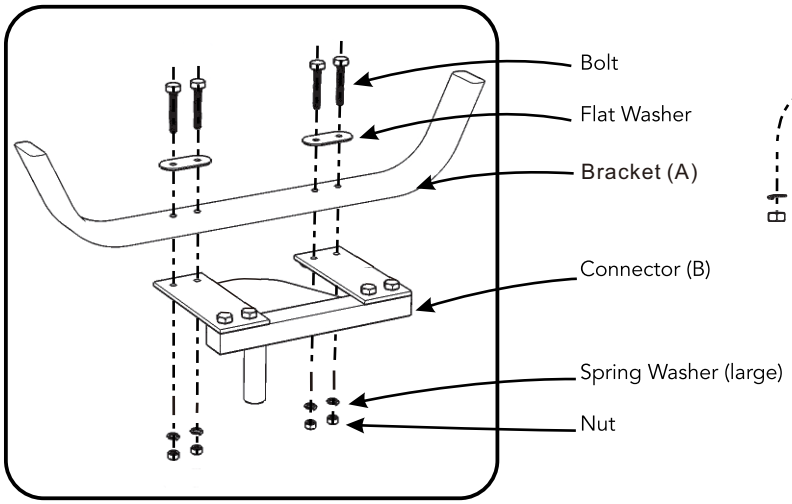



Figure 1

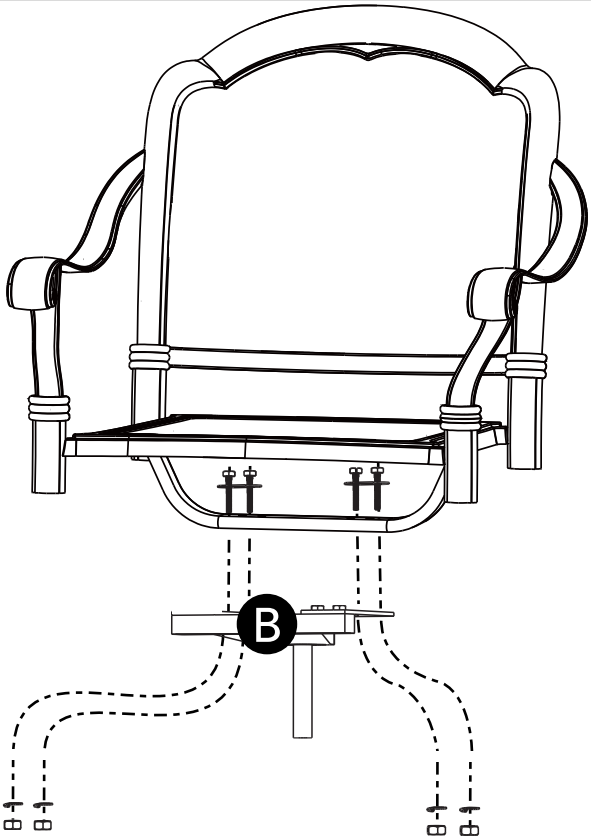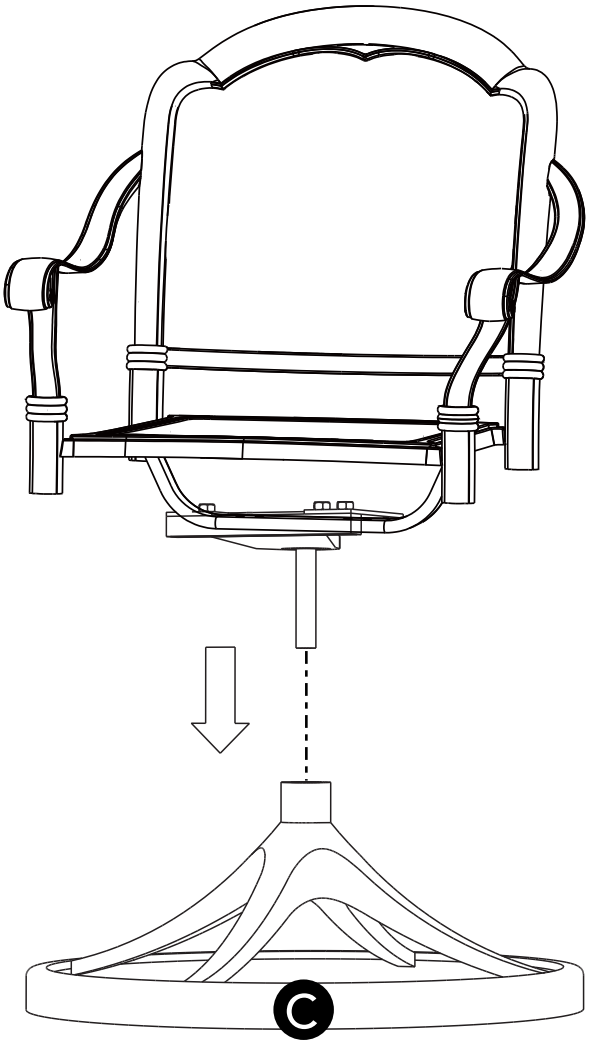


## STEP 3

Place unit onto Base (C).