

MANUAL BOOK




MAIN SPECIFICATIONS

Type	Chandelier
Fixture Size	D 23",H75 "
Hanging Chain	Max.78"
Weight	Appr.85 LBS
Bulbs Required	21 E 12 Bulbs (not included)
Wattage	Max.60W per Bulb
Voltage	110V-130V


PREPARATION

- Check if the packaging is complete and remove all accessories from the packaging
- Refer to the accessory list on pages 4 and 5, verify and familiarize with the parts. **Easily fragile/damaged/lost parts come with spare parts to ensure a smooth installation**
- If dimming function is required, please purchase suitable dimming bulbs and matching dimming switches
- Assembly will take time,especially for hanging crystals which is inevitable for most chandler installations. Please be patient
- Please wear gloves for installation


ToolsYouNeed




☒ Ladder




☒ Pliers




☒ Wire Strippers



☒ Screwdrivers



☐ Power Drill (optional)



☐ Drill Bit (optional)

If mounting to a support structure,you will also need the optional tools.

WARNING/CAUTION

WARNING:FOR YOUR PROTECTION AND SAFETY-Carefully read and understand the information given in this manual before beginning assembly and installation.Failure to do so could lead to electric shock,fire or other injuries.PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED IN ACCODANCE WITH THE APPLICABLE INSTALLATION CODE.

BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF;EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF.TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE:The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur.It must be understood that common sense,caution,and care,are factors which cannot be built into any product.These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION:Before assembling the lighting fixture,refer to the section titled Wiring Connections.If you feel you do not have enough electrical wiring experience,either refer to a do-it-yourself wiring handbook or have your lighting fixture installed by a qualified,licensed electrician.

LIGHT BULBS REQUIRED

This fixture uses E12 bulb base, works with incandescent,LED,CFL,halogen or color changing bulbs up to 60W. Fully dimmable when used with dimmable bulbs and a compatible dimmer switch(not included).

Due to different requirements,in order to avoid waste,**BULBS ARE NOT INCLUDED IN THIS ITEM.**Please purchase the right bulbs you need.

21 pieces E 12 bulbs are required for this light fixture.

Trouble Shooting

1.Missing/Broken Parts

·Make a list of the missing/broken parts according to the packing list,take photos for broken parts,then email us for free replacements.(If spare parts in package is still insufficient)

2.Bulbs Do Not Light Up

- Check your power and switch to make sure it's power on.
- Check the bulb to make sure it's installed correctly.
- Change a new bulb.
- Check the wires to make sure they are connected correctly.

3.Bulbs Flicker/Noisy Operation


- Check the bulb to make sure it's installedcorrectly.
- Change a new bulb.
- Make sure your bulb is dimmable if you use a dimmer switch.

4.Could Not Install/Assemble

- Take photos of the ceiling/fixture,contact seller for technical support.

Trouble Shooting


To clean,wipe fixture with soft cloth.Spray from chemical cleaners can discolor the finish of fixture.Do not use scouring pads,powders,steel wool or abrasive paper to clean this fixture.

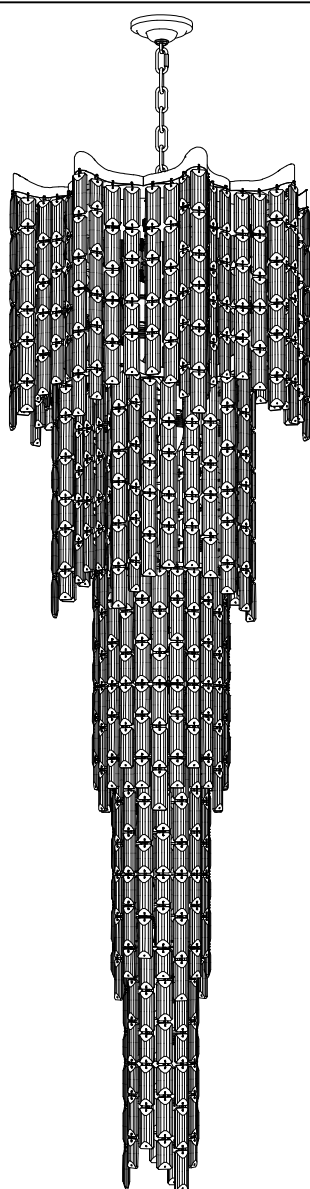

- Notes:
- 1) Please make sure to wear gloves and hang the crystal.
 - 2) Please pay attention to hanging the crystals on each layer horizontally during the hanging process.
 - 3) If crystals break during transportation or installation, don't worry, there are spare crystals in package.
 - 4) If there are slight flaws on the crystal, it is a normal phenomenon and there will be no visual impact after installation


We provide 24-hour customer service, and any questions you have will be answered within 24 hours. If you have any questions or problems, please feel free to contact us, your order ID and details are needed so that our customer service will help you more quickly and accurately!

Have a nice day!

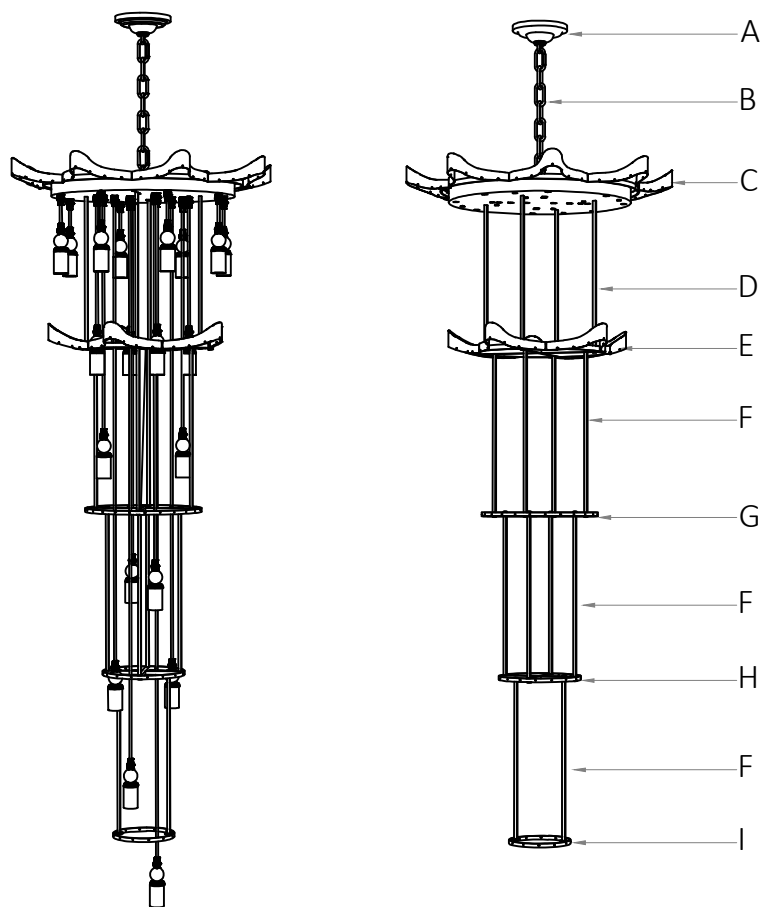

Main view

Showing the position of each part on the light fixture (excluding crystals)



①:crystals(26+1 extra)



②:crystals(39+1 extra)




③:crystals(52+1 extra)



④:crystals(26+1 extra)

CRYSTAL LIST


All the crystals for this chandelier have been installed and have also prepared some spare crystal parts in case of detachment or damage



A:Ceiling Canopy(1pcs)




B:Metal Chain (1pcs)

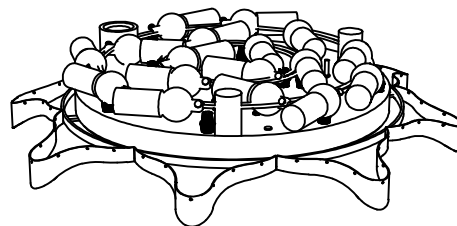

C:Frame-1(1pcs)




D:Connection bar-1 (4pcs)

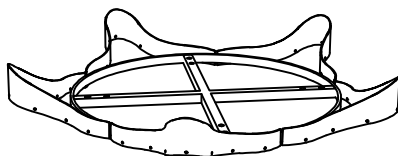

E. Frame-2(1pcs)



F: Connection bar-2 (10pcs)



G: Frame-3(1pcs)



H: Frame-4(1pcs)




I: Frame-5(1pcs)

OTHERS


- White gloves(1 pair)
- Fittings bag(1 bag,Screws and other small accessories)
- Installation manual(1 set)

- 1) Release the lamp holder wires on frame-1(C)

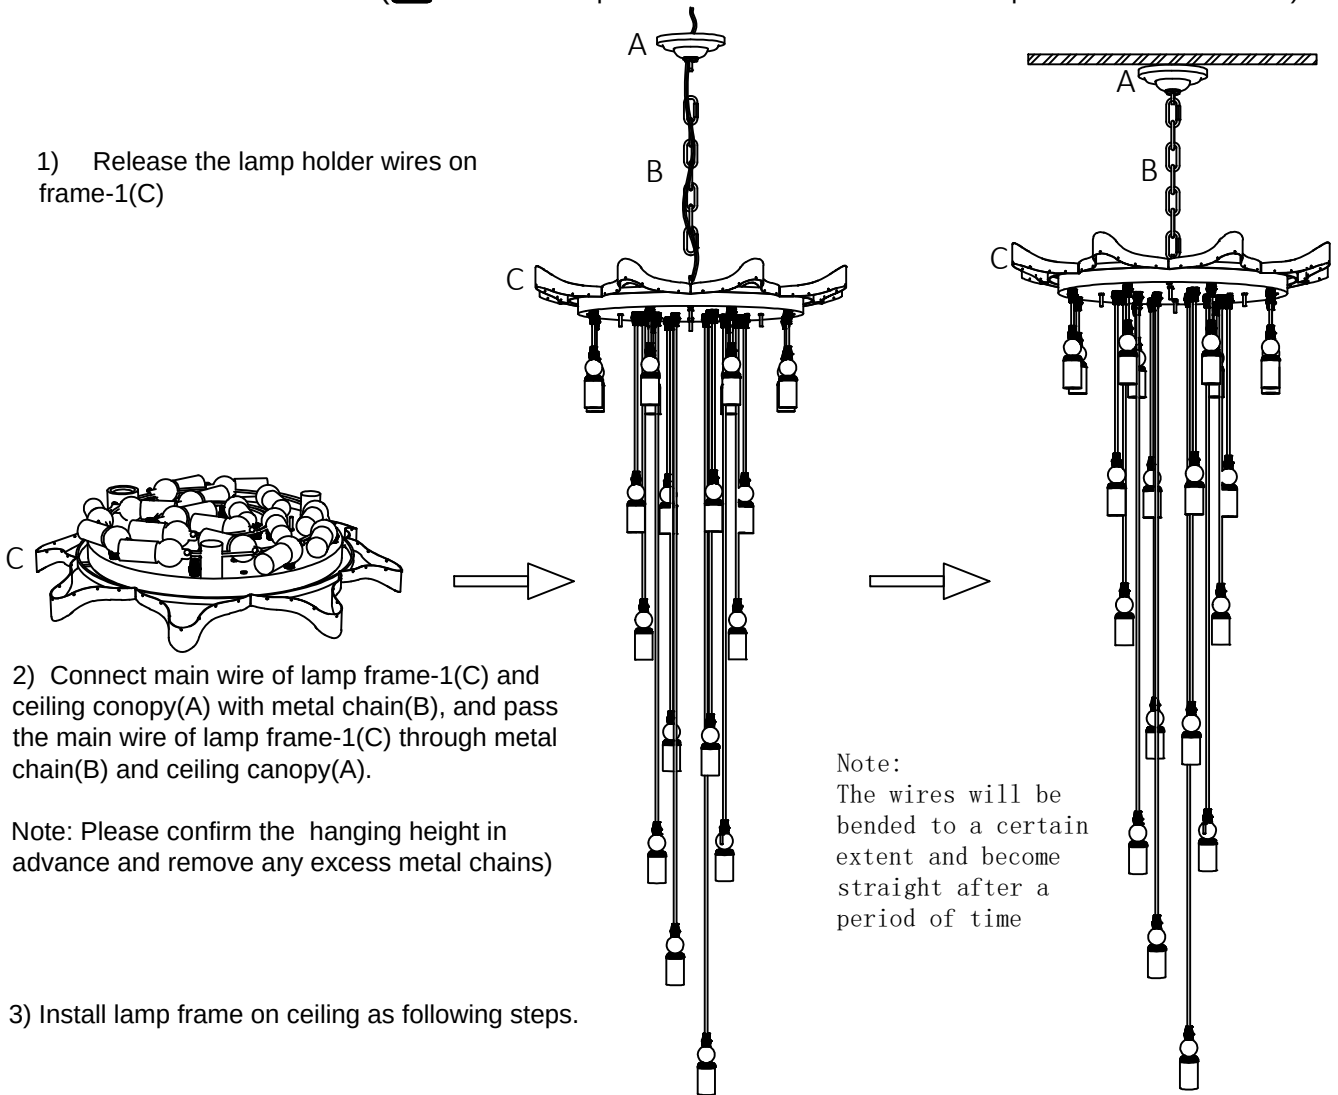

Note: Please confirm the hanging height in advance and remove any excess metal chains

- 3) Install lamp frame on ceiling as following steps.

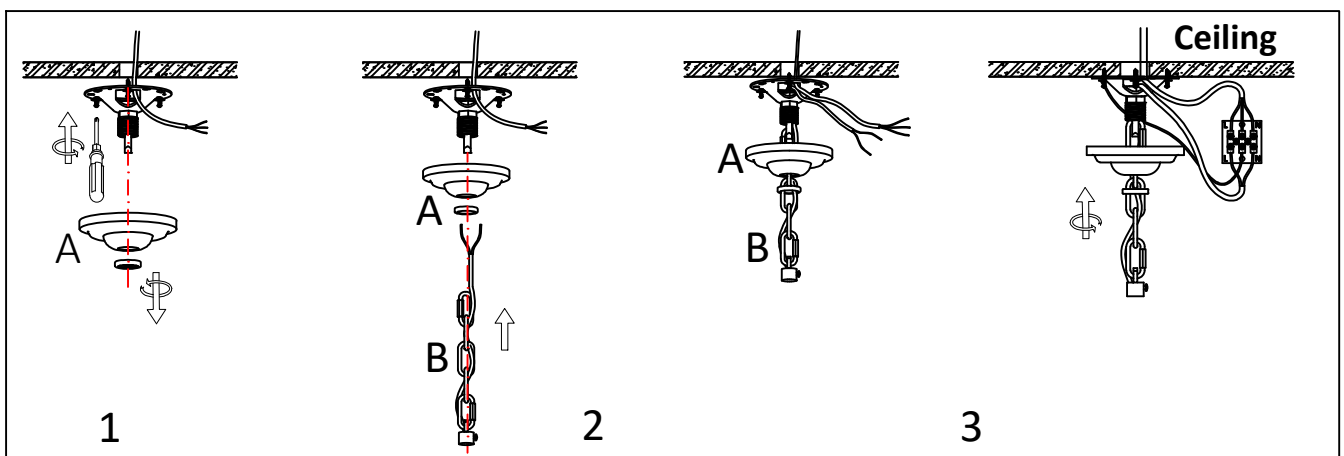


- 1) Take apart mounting bracket from ceiling canopy(A), and install mounting bracket on ceiling with screws.
- 2) Pass the main wire and metal chain(B) through ceiling canopy, and connect the end of metal chain with mounting bracket.
- 3) Connect main wire with housing wire, then lock ceiling canopy on mounting bracket(The main wire is a transparent line, with one branch serving as the N line and the other as the L line, and there is no need to strictly distinguish between them, the bare copper wire as ground wire)

2. Assembly of lamp frame

Note: connection bars(D and F) are of different lengths, D is shorter than F


- 1) Install frame-2(E) on frame-1(C) via connection bar-1(D) with screws.
- 2) Install frame-3(G) on frame-2(E) via connection bar-2(F) with screws.
- 3) Install frame-4(H) on frame-3(G) via connection bar-2(F) with screws.
- 4) Install frame-5(I) on frame-3(H) via connection bar-2(F) with screws.

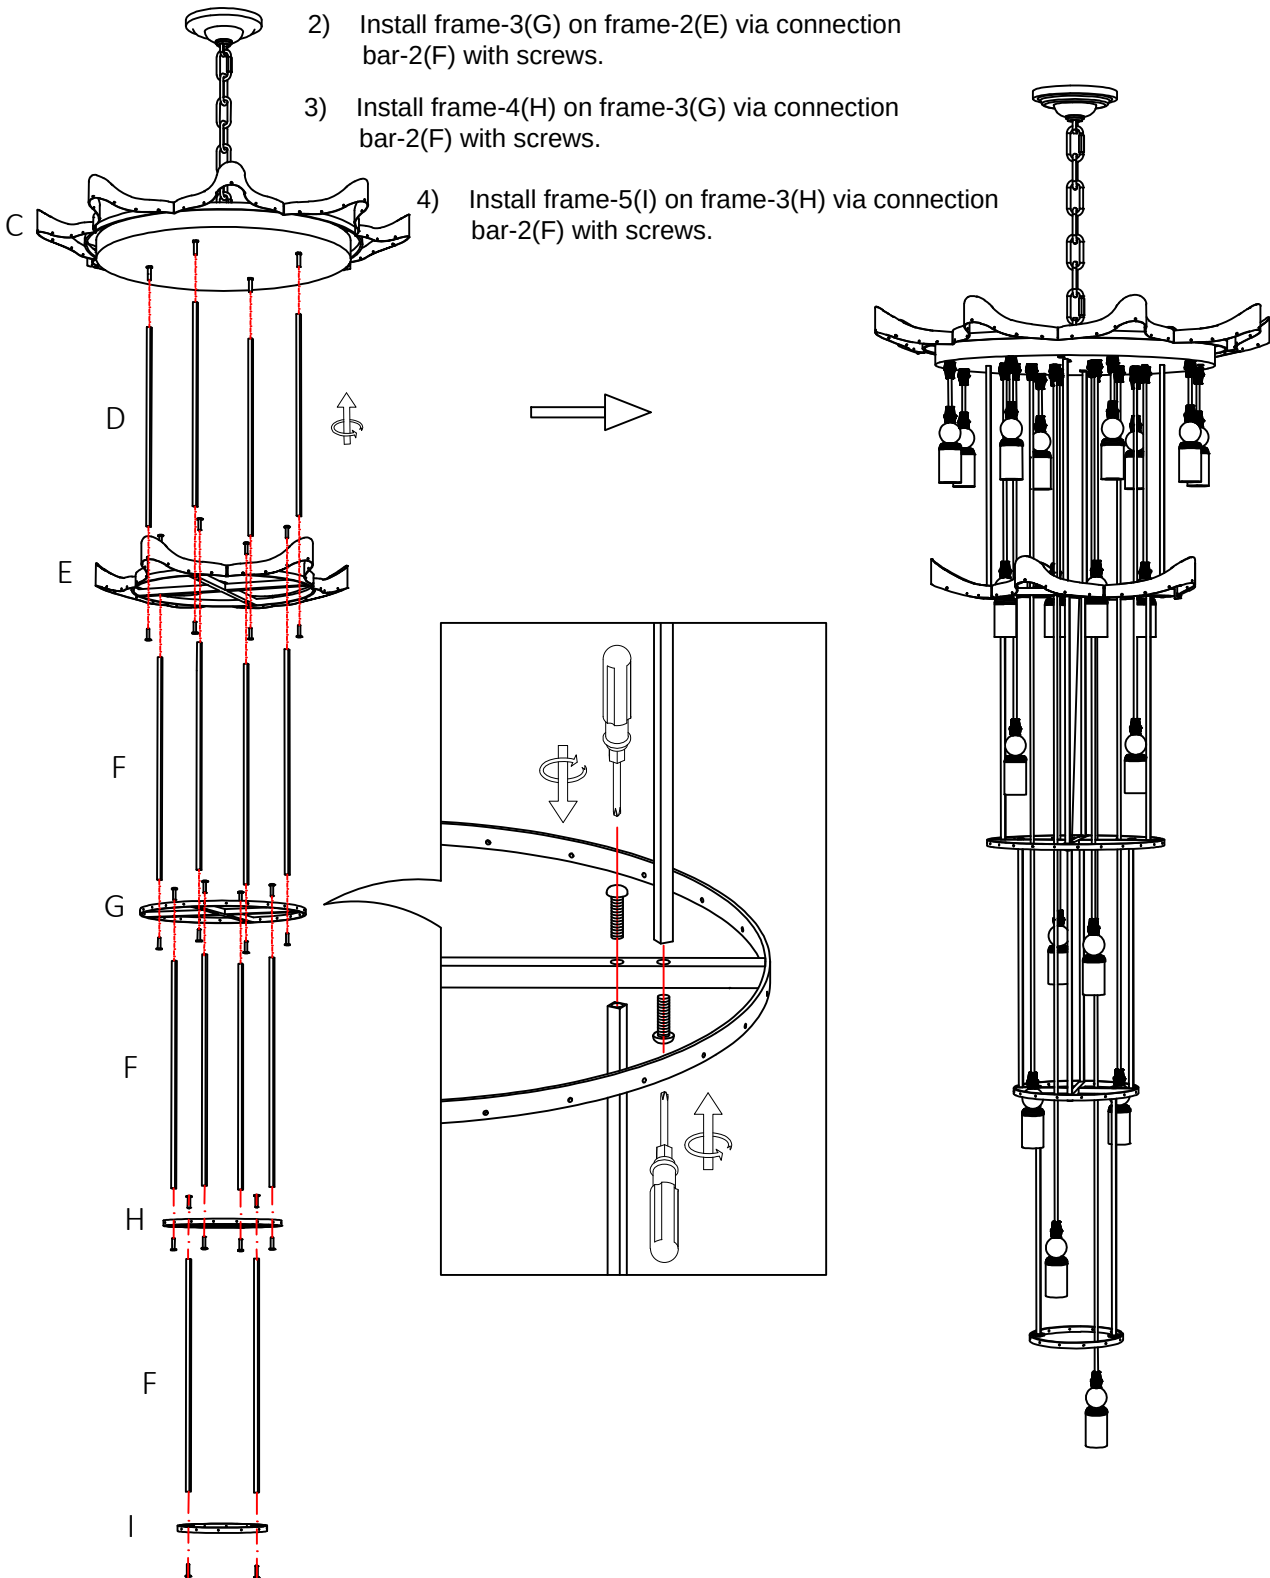

FIXTURE INSTALLATION



3. Hanging Crystals

(This step will take long time, please be patient, you are about to complete a great project.)

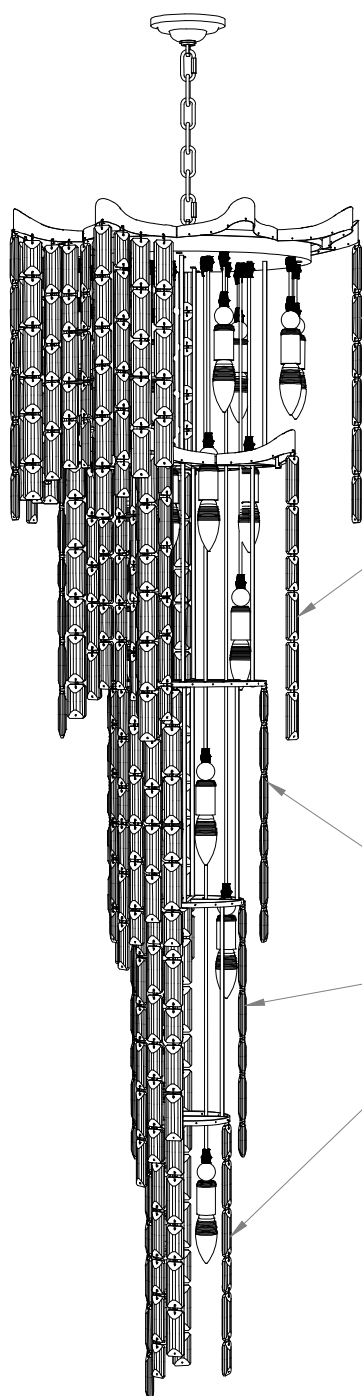

2). The top two layers are hung in the order of ①, ②, ③, ④, ③, ②, and ①

Note: ④ is located in the protruding part of frame.

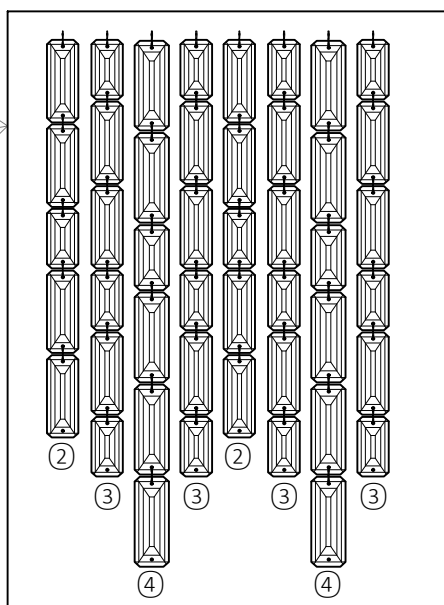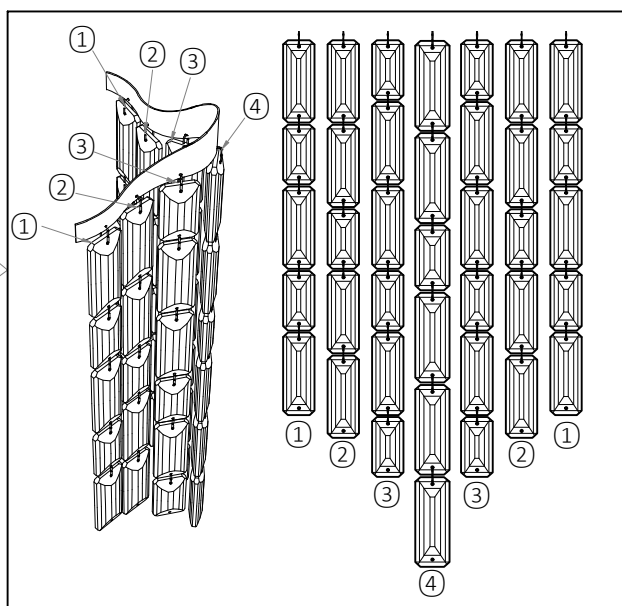

1). Hang the bottom three layers in the order of ②, ③, ④, and ③