

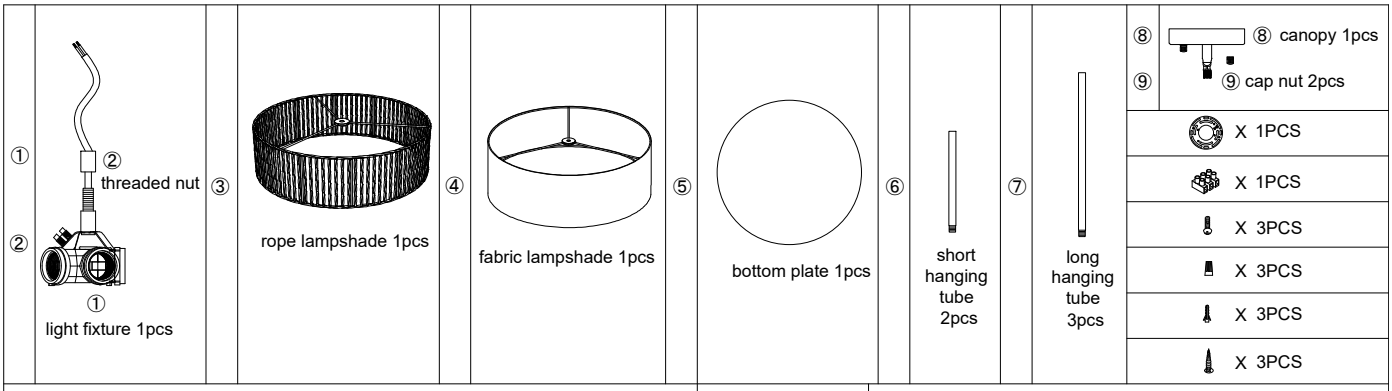


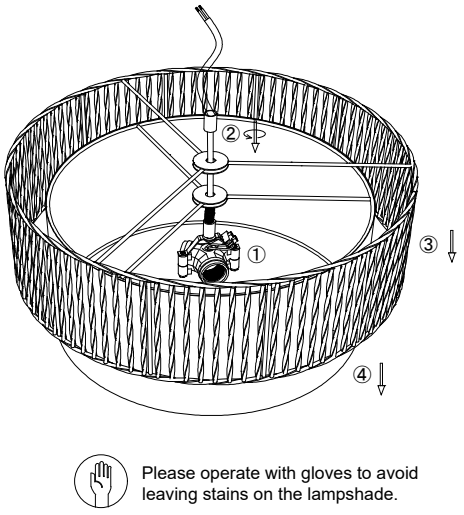


Please operate with gloves to avoid leaving stains on the lampshade.


1.Remove out the threaded nut ② from fixture ①, let the wire of the fixture ① go through the fabric lampshade ④ , rope lampshade ③ and threaded nut ②, rotate nut ② to fasten all parts together.




can connect more tubes to get the height you need

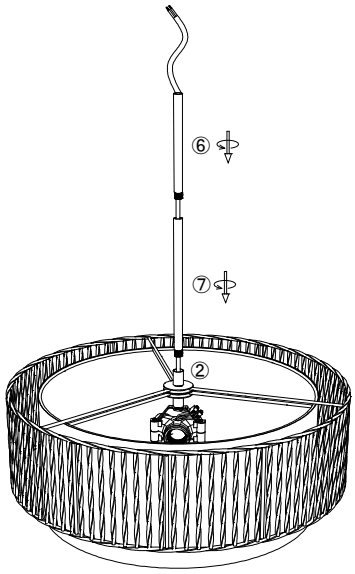


2.Let the wire go through the tube ⑦ and tube ⑥, rotate to install the tubes to the fixture.(can connect more tubes to get the height you need)

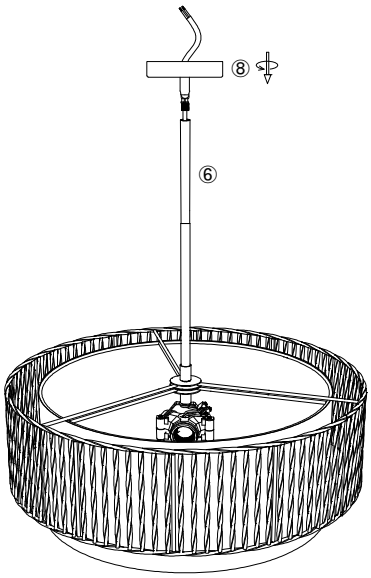


3.Install the canopy ⑧ to the fixture.



Put the bottom plate ⑤ at an angle into the lampshade ④, then adjust it to level.



suggest to use G45 pingpong bulb !

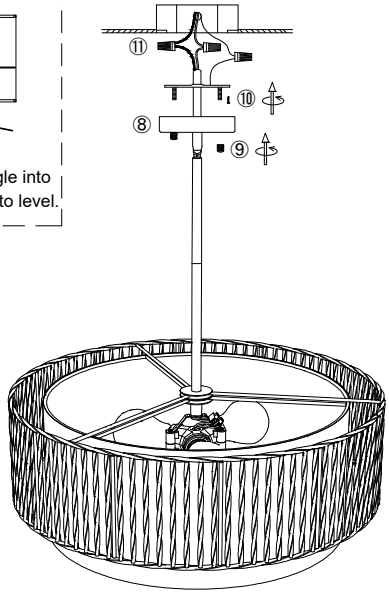

4.Install the bracket to the ceiling junction box with screw ⑩.
5.Connect the wire to your home line with cap connector ⑪.
6.Install the fixture to the bracket with cap nut ⑨.
7.Install the bulb ⑫ and bottom plate ⑤.

D9066S-3

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !