
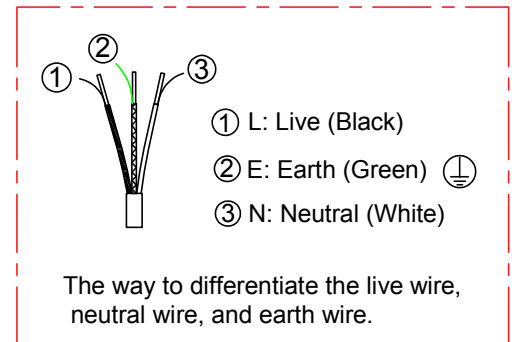


ASSEMBLY INSTRUCTIONS

1. Fix the lamp body (A) to the canopy (B) and secure with the nut (C).
2. Connect the fixture wires (D) with wire nuts: the black wire with live wire (L) and white wire with neutral wire (N). Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape and manage the wires with wire wrap straps.
3. Attach the break (E) to the threaded tube of the lamp body using the nut (F) to secure.
4. Pass the wires through the hanging rod (G) and screw the rod into the threaded tube of lamp body.
5. Open the screwgates of carabiners on the chain (H) and connect the carabiners with the loops on the hanging rod (G) and the canopy (J).
6. Install the mounting plate (K) on the outlet box with the screws (L).
7. Loosen the hex nut around the bolts (M) and screw in or unscrew the bolts from the junction box to get the right length for installation.
8. Connect the fixture wire to the circuit wire by wire nuts (N), black wire with live wire, white wire with neutral wire, ground wire with ground wire.
9. Fix the lamp body (J) to the mounting plate (K) with the ball nuts (O).
10. Screw the bulb (P) into the lamp holder.
11. Screw the lampshade (Q) into the bobèche gently.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

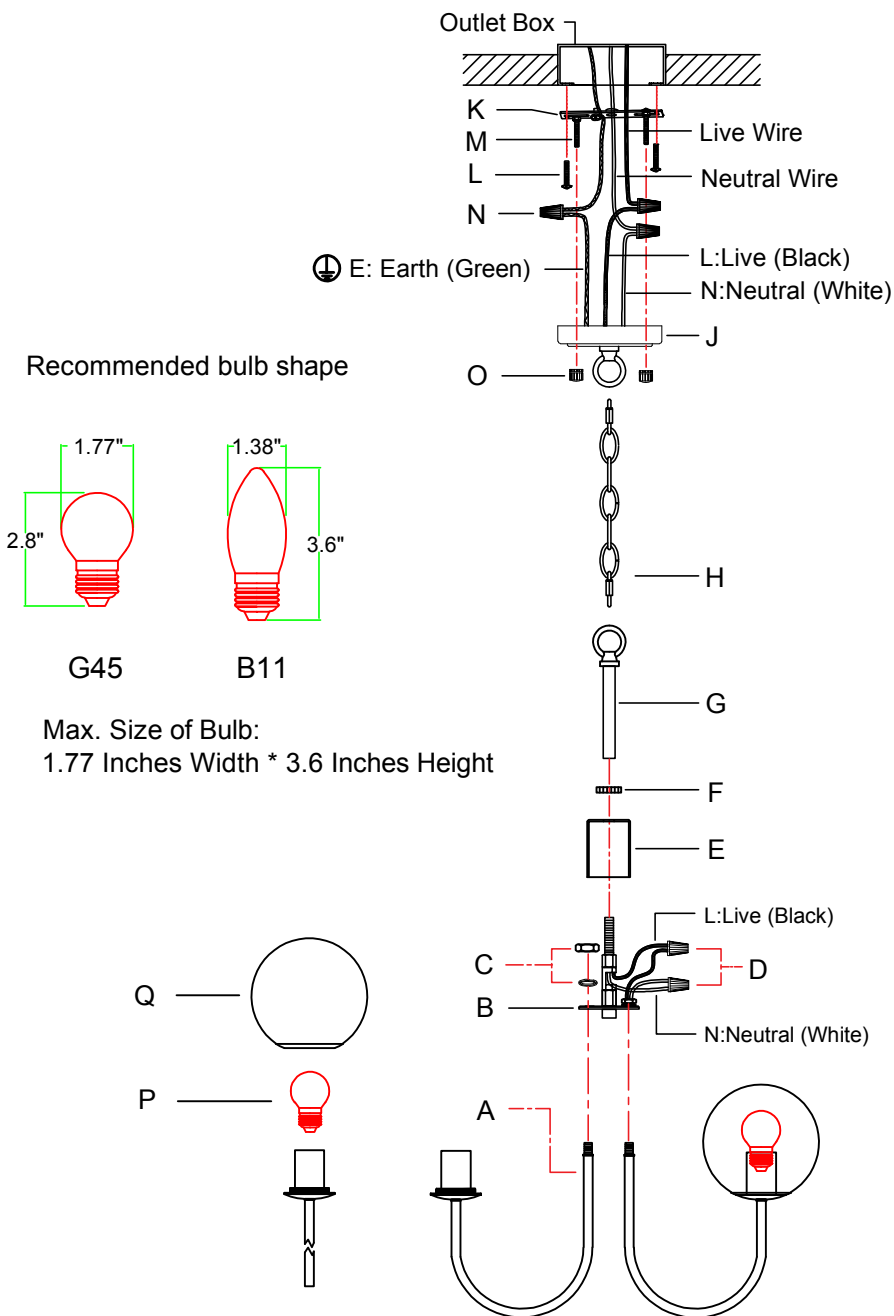

Tighten the screws before installing the glass globe. Note: Do not over tighten the screws or you will potentially break the glass.

