

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning


To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.



Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	G	Crystal string		5X	M	Internal teeth Washer		6X	S	Glass bowl		1X
A1	Mounting screw		2X					M1	Plate Washer		2X				
B	Canopy		1X	H	Bulb		5X	N	Spring washer		5X	T	Trumpet cap		1X
								N1	Plastic washer		2X				
C	Lock		1X	I	Glass bowl		5X	O	Thick hex screw		5X	U	Glass bowl		1X
								O1	Thin hex screw		3X				
D	Out ring		1X	J	Socket cover		5X	P	Crystal string		5X	V	Metal finial		1X
E	Chain		1X	K	Glass arm		5X	Q	Wire nut		4X	W	Dropper		1X
F	Dropper		29X	L	Acrylic ring		5X	R	Support wire cap		1X	X	Metal round plate		1X

Installation

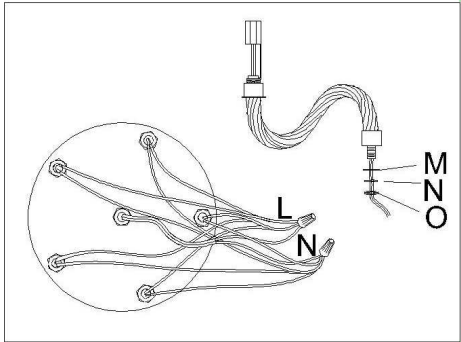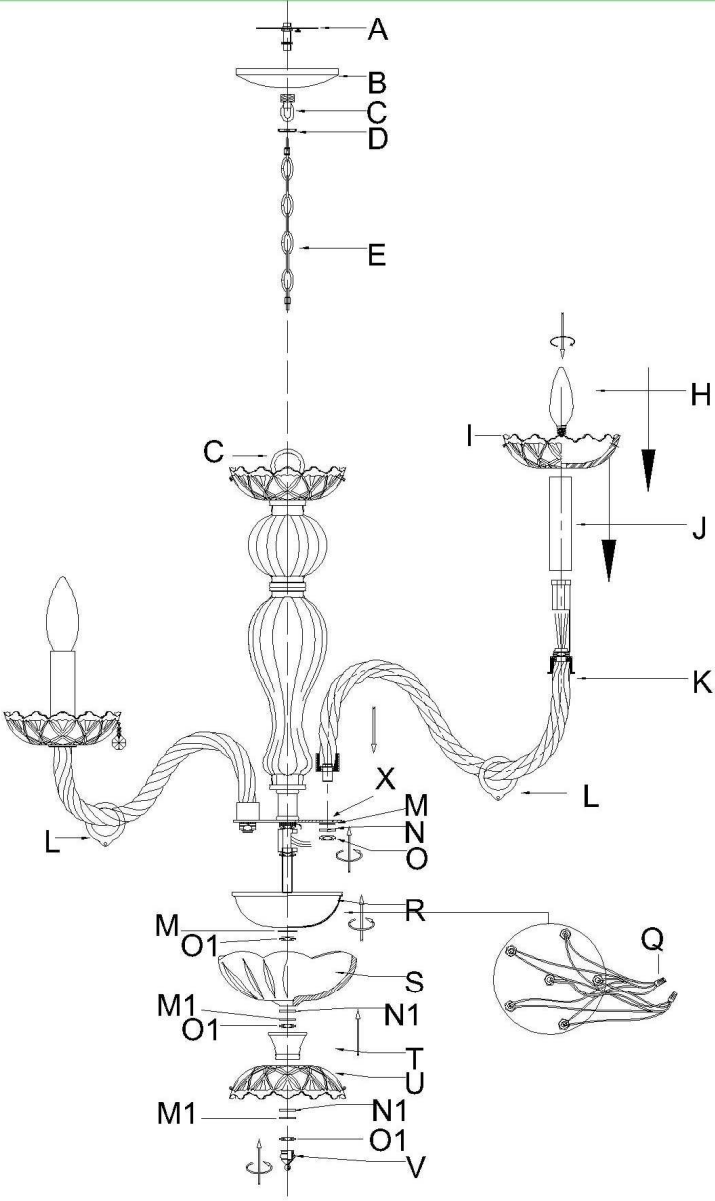

Step 1

Unpack all parts from cartons carefully

Place the glass arm(K) to the metal round plate(X) and tighten with washer(M),spring washer(N) and thick hex screw(O)

Connect electrical wire by wire nut(Q), identify positive and neutral (See Step 2)

Place the support wire cap(R), internal teeth washer(M),thin hex screw(O1), glass bowl(S),plastic washer(N1),flat washer(M1), thin hex screw(O1)and trumpet cap(T) ,glass bowl(U) to the nipple of the metal round plate(X) then tighten with plastic washer(N1),flat washer(M1),thick hex screw(O1) and metal finial(V).

Place acrylic ring(L) to the glass arm(K) by cross the lampholder.

Place socket cover(J),glass bowl(I) and bulb(H) to the lampholder.


Screw the chain(E) to the lock(C) of the lampbody

Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor



*Note: When parallel wire(SPT I & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)



Step 3


Hang list:

Hang dropper(F) on the hole of acrylic ring(L),the glass bowl(I) of the lampholder, the top glass bowl and the bottom glass bowl(U)

Hang crystal string(P) to the acrylic ring(L) of each glass arm(K)


Hang crystal string(G) to the hole of top glass bowl and the hole of the glass bowl(I)

Hang dropper(W) to the metal finial(V)

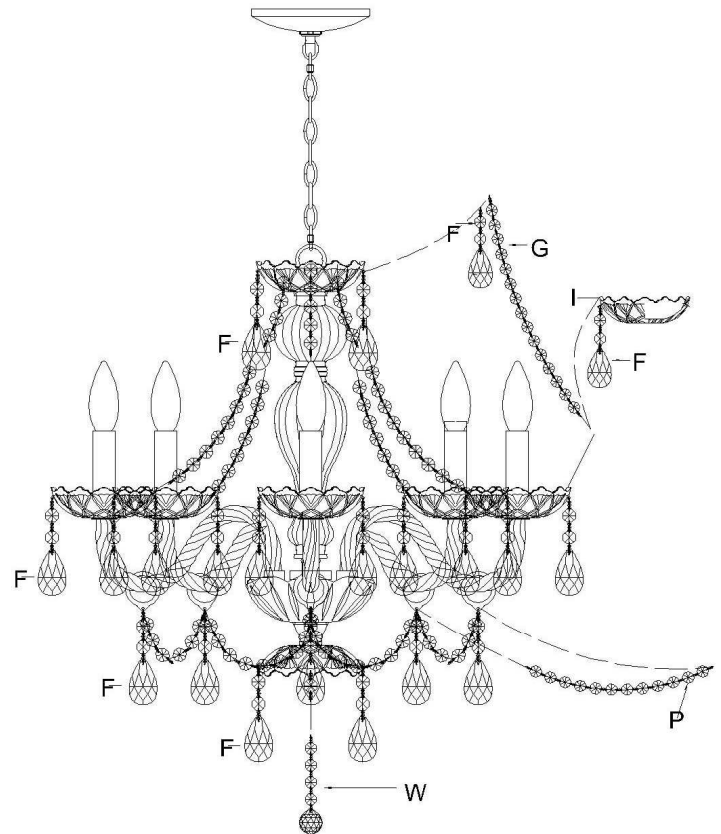

Step 4

Installing the mounting bar(A) with screws(A1) , and secure canopy(B) with the lock(C) and tighten with out ring(D)

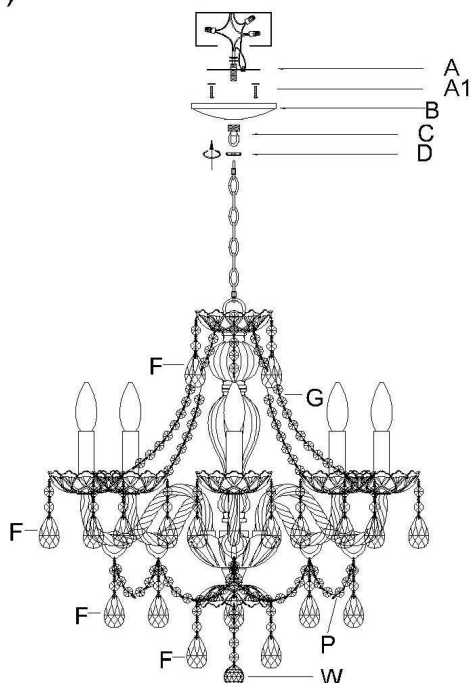

Step 5

Installing whole body to the top lock(C)

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor



ENJOY YOUR LAMP