






Components List

Part Name	Part Description			Qty
	Description	Specification	Figure	
T Glass	Glass for top shelf	Size:1530*450mm Thickness:12mm		1
M Glass	Glass for middle shelf	Size:1530*425mm Thickness:6mm		1
B Glass	Glass for bottom shelf	Size:1530*450mm Thickness:6mm		1
T-L	Long tube	Length:268mm Diameter:50mm		4
T-S	Short tube	Length:190mm Diameter:50mm		4
FT	Foot tube	Length:70mm Diameter:50mm		4
CC-L	Chrome Cap(Large)	Diameter:50mm Thickness:8mm		4
CC-S	Chrome Cap (Small)	Diameter:28mm Thickness:8mm		4
I B-1	I bolt (NO.1)	Length:35mm Diameter:10mm		4
I B-2	I bolt (NO.2)	Length:50mm Diameter:10mm		8
I B-3	I bolt (NO.3)	Length:45mm Diameter:6mm		4
T E S	Tube end seal	Diameter:50mm Thickness:2mm		20
CT	Cable Tidy	Size:472*144mm Thickness:20mm		1
TOOL-1	5# Tool (Screw IB-1 and IB-2)			1
TOOL-2	3# Tool(Screw IB-3)			1

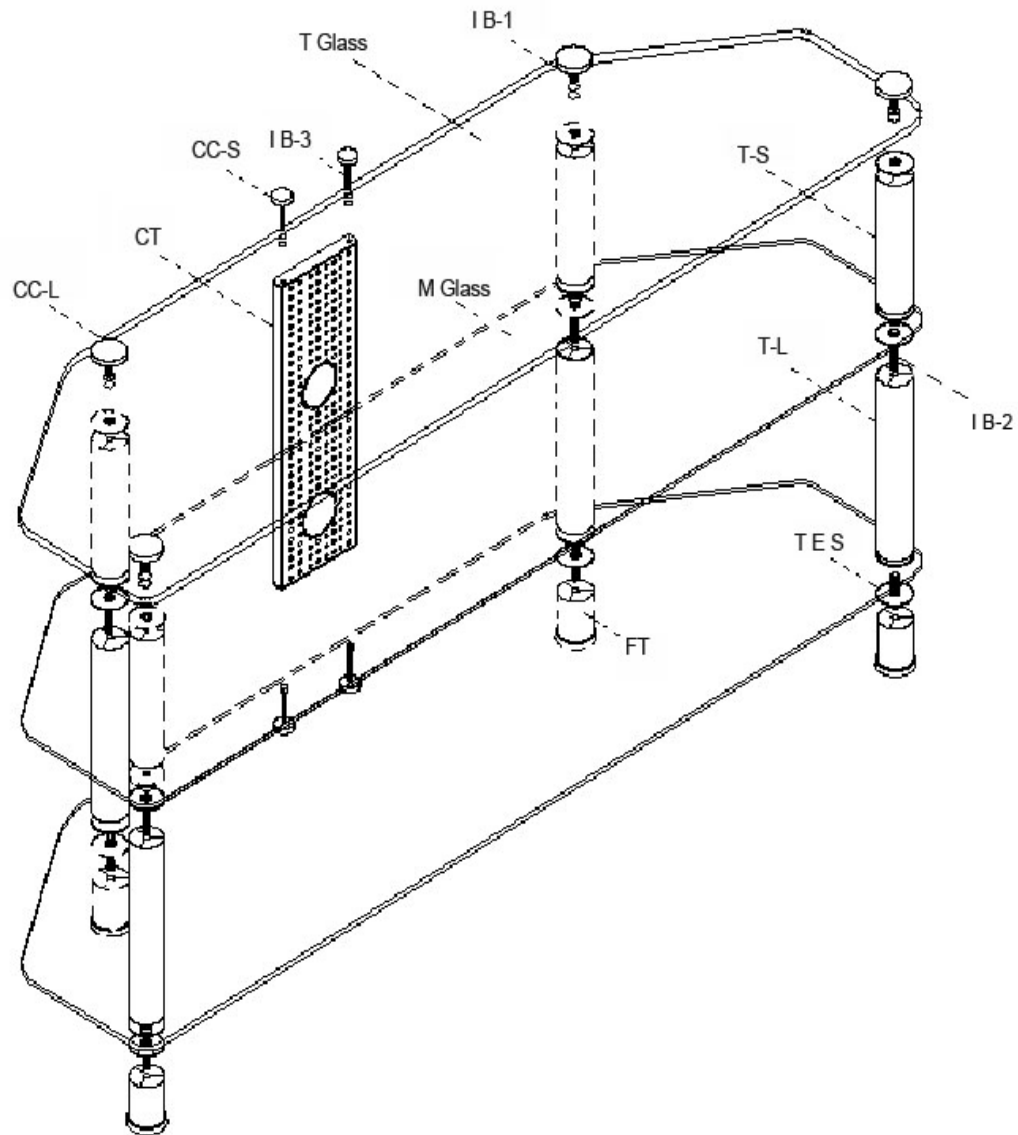

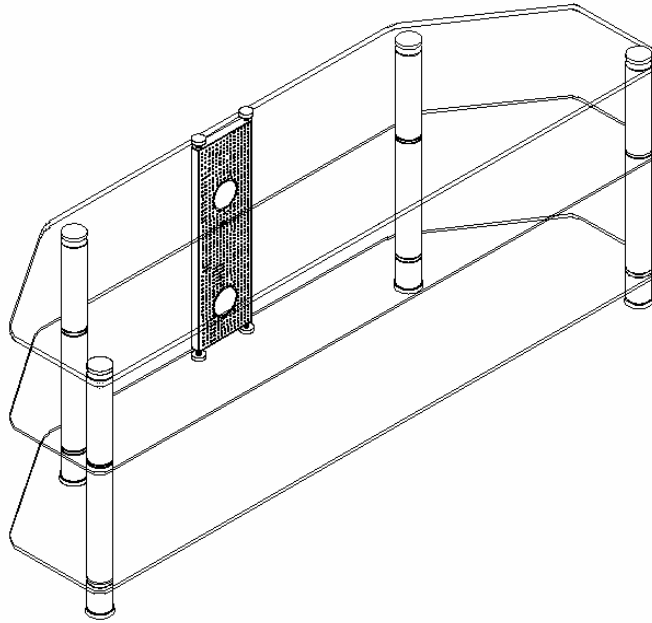

Stage 1

Please note stand is best assembled from the bottom up.

- 1.1 Screw in I bolts (I B-2) to the top of each foot tube (FT).
- 1.2 Place bottom shelf (B Glass) in position over each foot tube leg with I bolts passing through holes in each corner of the shelf. Then screw long tubes (T-L) onto each exposed bolt until tight.
- 1.3 Screw in I bolts (I B-2) to the top of each long tube (T-L).

Stage 2

- 2.1 Place middle shelf (M Glass) in position over each long tube leg with I bolts passing through holes in each corner of the shelf. Then screw short tubes (T-S) onto I bolts until tight.
- 2.2 Screw in I bolts (I B-1) to top of short tubes.
- 2.3 Place top shelf (T Glass) over I bolts resting on short tubes.
- 2.4 Attach cable tidy to top glass and bottom glass with small chrome cap (CC-S) ---- screw I bolts(I B-3) to small chrome cap. Then screw I bolts through the cable tidy nuts.
- 2.5 Secure top glass with large chrome caps (CC-L)