



















ASSEMBLY INSTRUCTIONS


Before you begin, please follow assembly instructions carefully, then follow them step by step.

Read instruction carefully . See Furniture Parts list and Hardware List for guidance . Be sure you have all parts before you start assembling . Place and assemble furniture on a clean flat soft surface , such as carpet or rug to prevent being scratched .

PART LIST		QTY
1	TOP PANEL	1 PC
2	BOTTOM PANEL	1 PC
3	SIDE PANEL (L)	1 PC
4	SIDE PANEL (R)	1 PC
5	MIDDLE PANEL	1 PC
6	BACK PANEL	1 PC
7	SHELF PANEL	6 PCS
8	DOOR PANEL (L)	2 PCS
9	DOOR PANEL (R)	2 PCS

HARDWARE			
A	MINI FIX	A1  A2  A3 	8 SETS
B	M8 X 30MM WOOD DOWEL		12 PCS
C	M6 X 50MM CSK CAP WOOD SCREW		4 PCS
D	ALLEN KEY M4		1 PC
E	M3.5 X 16MM C.B SCREW		48 PCS
F	M4 X 25MM C.B SCREW		8 PCS
G	5/8 NAIL		32 PCS
H	METAL SHELF SUPPORT		24 PCS
I	DRAWER STOPPER(2 PIN)		1 PC
J	5/8 HINGES		8 PCS
K	MOOD HANDLE		4 PCS
L	PVC ROUND LEG		4 PCS
M	TIPPING PACK		2 SETS

SELF-PREPARED TOOLS: Tools below are NOT included in package.	
 SCREWDRIVER	 HAMMER
 POWER DRILL	

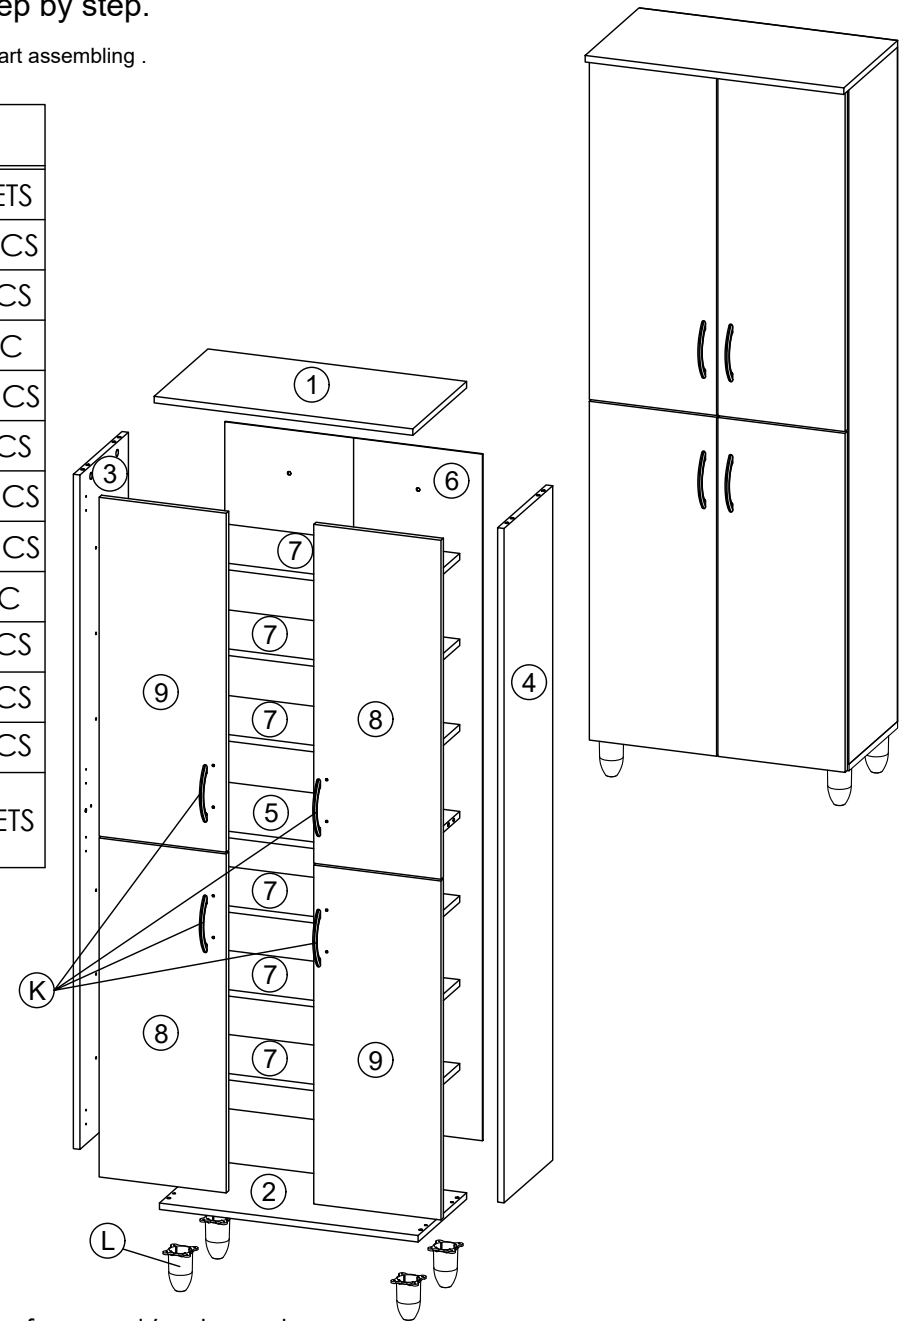


Reminder:

Please ensure that all surfaces and edges with colours/laminations are facing forward/outward.

ASSEMBLY INSTRUCTIONS

STEP 1

- Insert hardware **A2** onto panel **(1)**.
(Repeat 4 times.)
- Hit hardware **I** onto panel **(1)**.
(Repeat 1 times.)

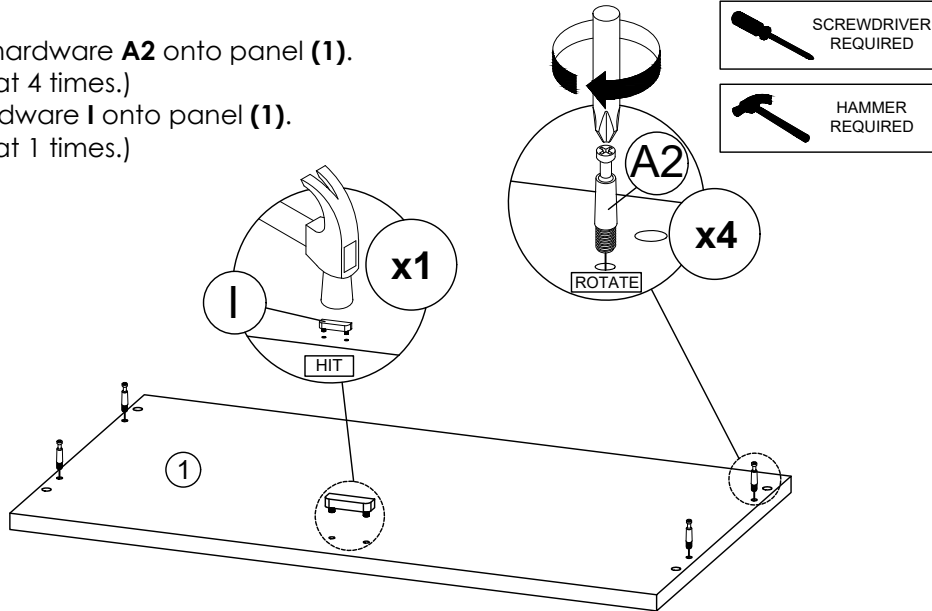


SCREWDRIVER
REQUIRED

HAMMER
REQUIRED

* Ensure the arrows on hardware **A1** point towards mounting positions.

STEP 2

- Insert hardware **A1** onto panel **(3)**, **(4)** and **(5)**.
(Repeat 8 times.)
- Insert hardware **A2** onto panel **(3)** and **(4)**.
(Repeat 4 times.)
- Insert hardware **B** onto panel **(3)**, **(4)** and **(5)**.
(Repeat 12 times.)

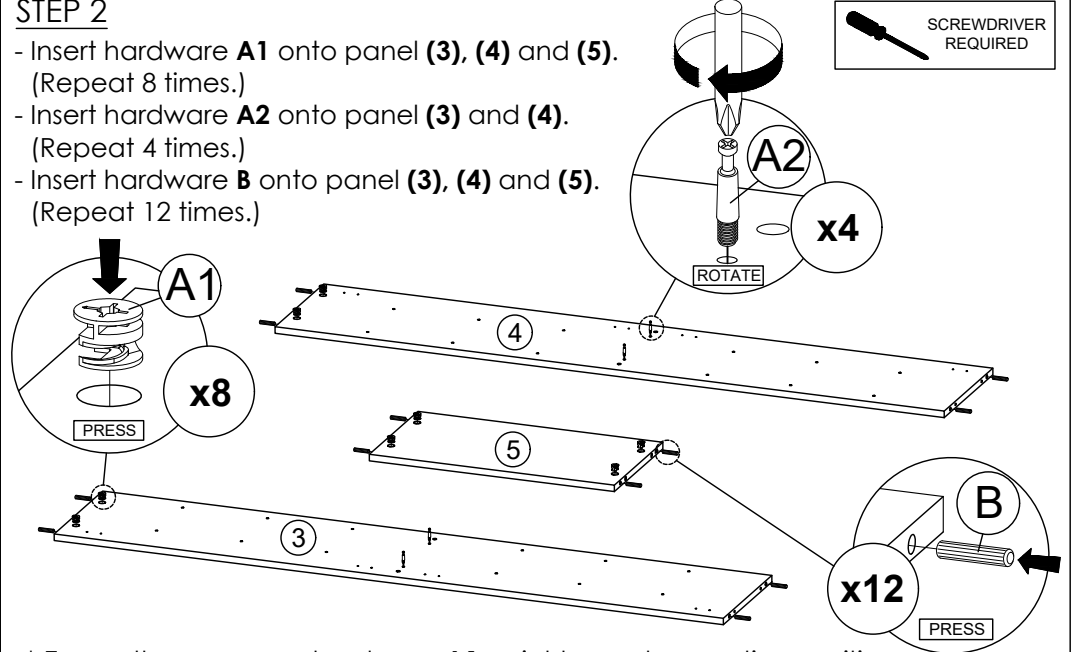


SCREWDRIVER
REQUIRED

* Ensure the arrows on hardware **A1** point towards mounting positions.

STEP 3

- Attach panel **(3)** and **(4)** to panel **(5)**.
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** onto all **A1**.
(Repeat 4 times.)

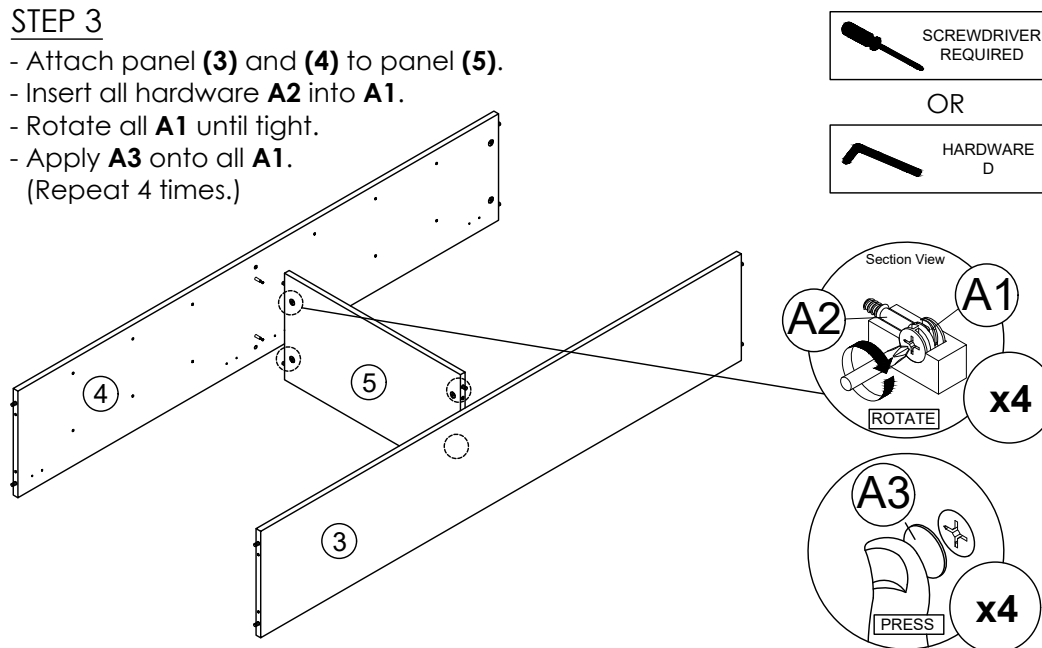

SCREWDRIVER
REQUIRED


OR

HARDWARE
D

* In this step hardware **A1**, **A2** and **B** are pre-inserted.

STEP 4

- Attach panel **(1)** to panel **(3)** and **(4)**.
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** onto all **A1**.
(Repeat 4 times.)

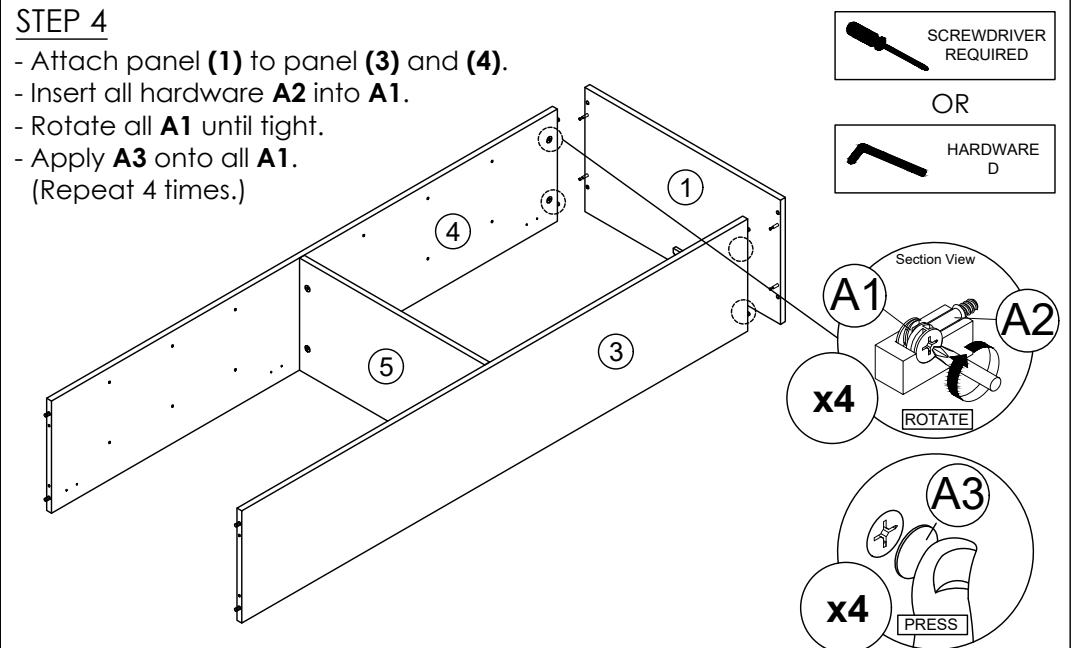

SCREWDRIVER
REQUIRED

OR


HARDWARE
D

* In this step hardware **A1**, **A2** and **B** are pre-inserted.

ASSEMBLY INSTRUCTIONS

STEP 5


- Connect panel (2) to panel (3) and (4) by using hardware C and D. (Repeat 4 times.)

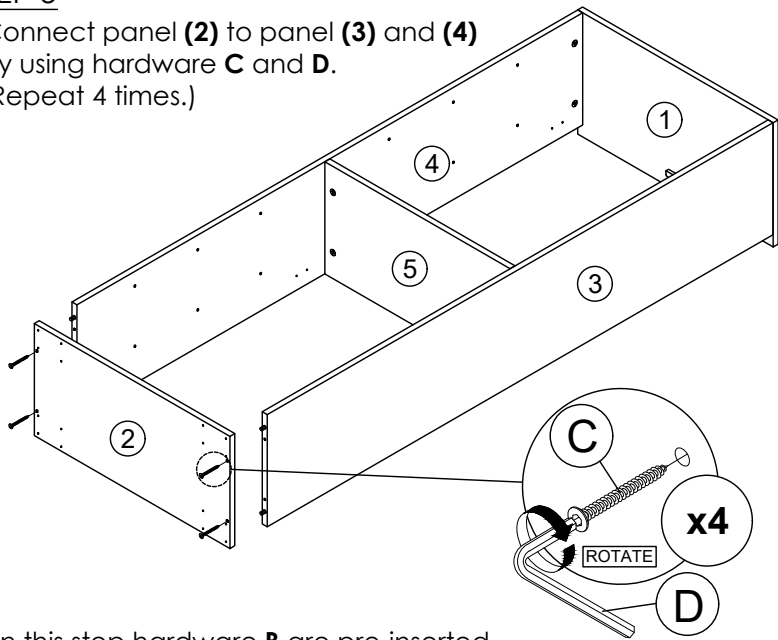

* In this step hardware B are pre-inserted.


STEP 6

- Assemble hardware L onto panel (2) by using hardware E. (Repeat 4 times for each hardware.)

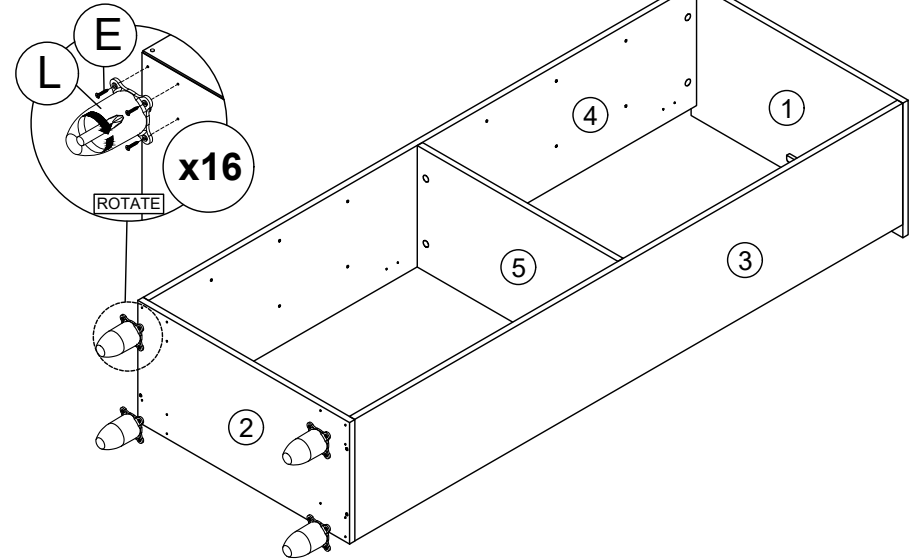



STEP 7

- Assemble panel (6) to entire body with hardware G. (Repeat 32 times.)

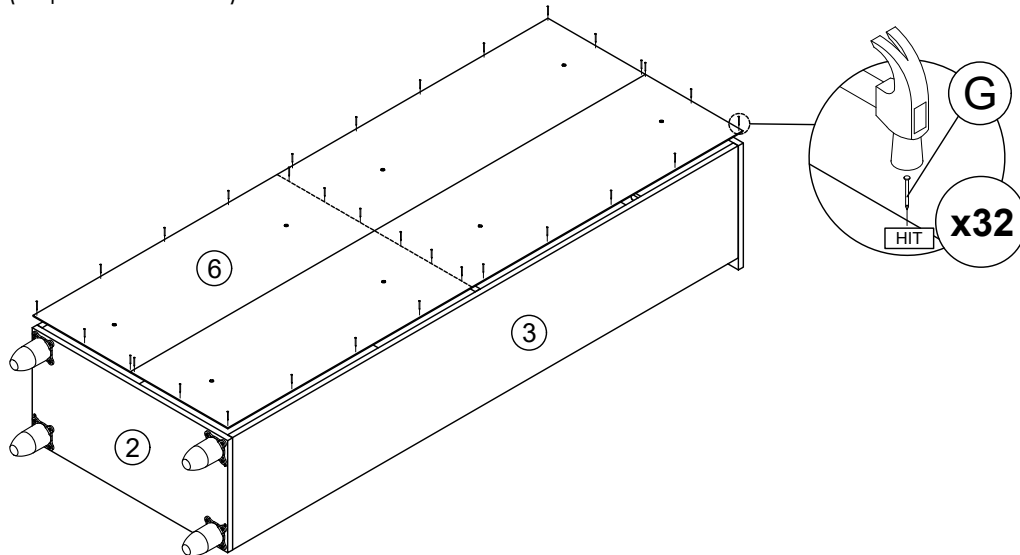

STEP 8


- Insert hardware H into mounting positions on panel (3) and (4) by hand. (Repeat 24 times.)

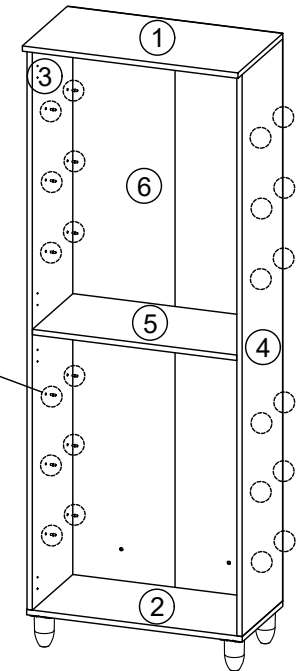

ASSEMBLY INSTRUCTIONS

STEP 9


- Assemble panel (7) into between panel (3) and (4).
(Repeat 6 times.)

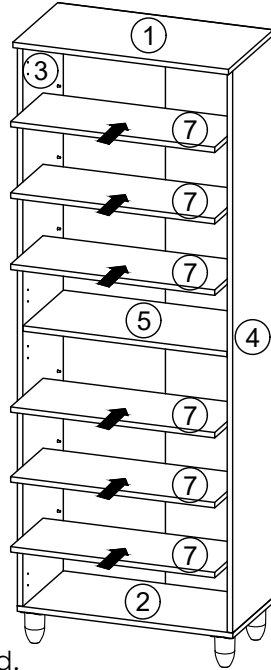

* In this step hardware H are pre-inserted.


STEP 10

- Fix hardware J onto panel (8) and (9) by using hardware E.
(Repeat 2 times for each hardware.)

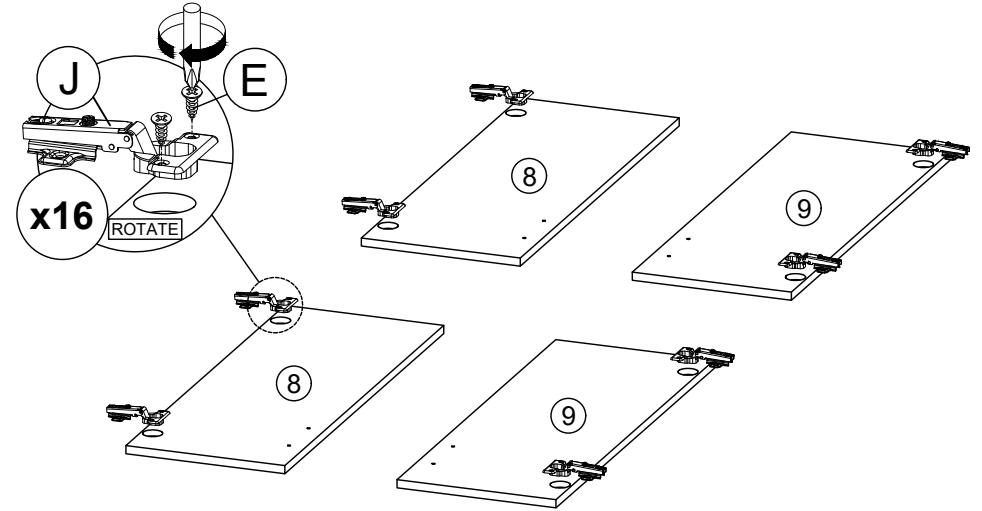


STEP 11

- Fix hardware K onto panel (8) and (9) by using hardware F.
(Repeat 2 times for each hardware.)

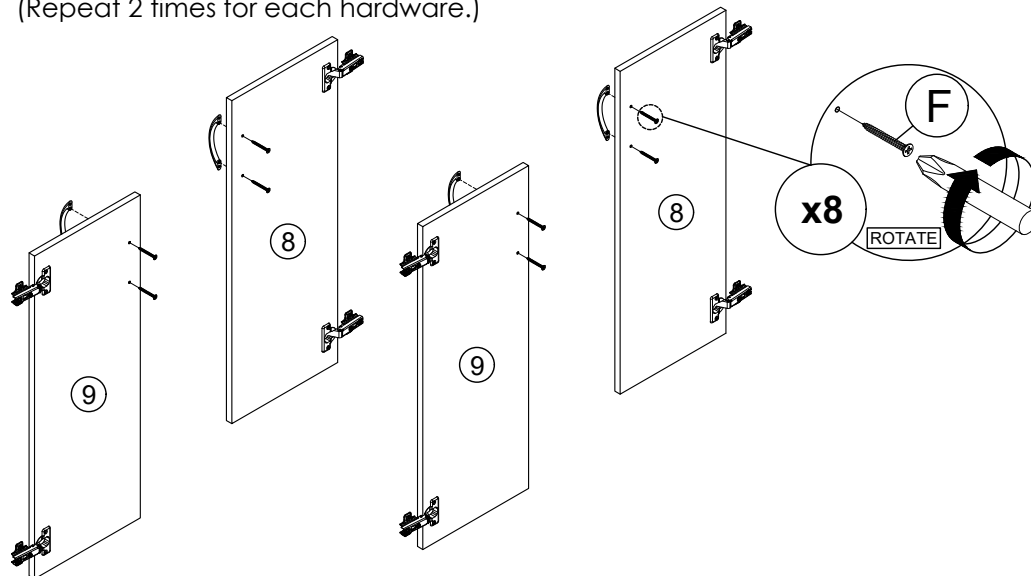

STEP 12

- Fix hardware J into panel (3) and (4) by using hardware E.
(Repeat 2 times for each hardware.)
- Tighten or loosen the screw to adjust position of panel (8) and (9).
(Do only when needed.)

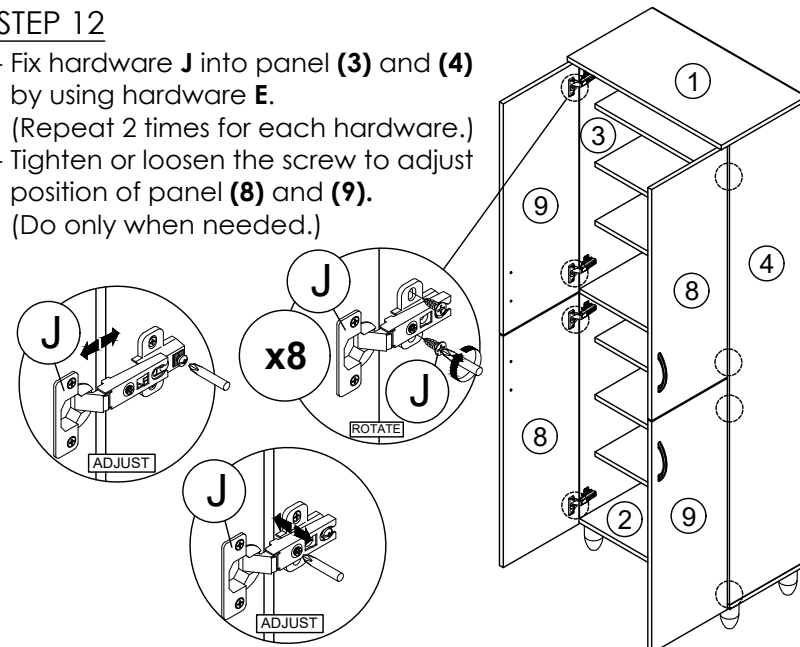


* In this step hardware J have been assembled in panel (8) and (9).

ASSEMBLY INSTRUCTIONS


STEP 13

Assemble hardware **M1** into panel **(1)** and **(6)** by using hardware **M2**.
(Repeat 2 times.)

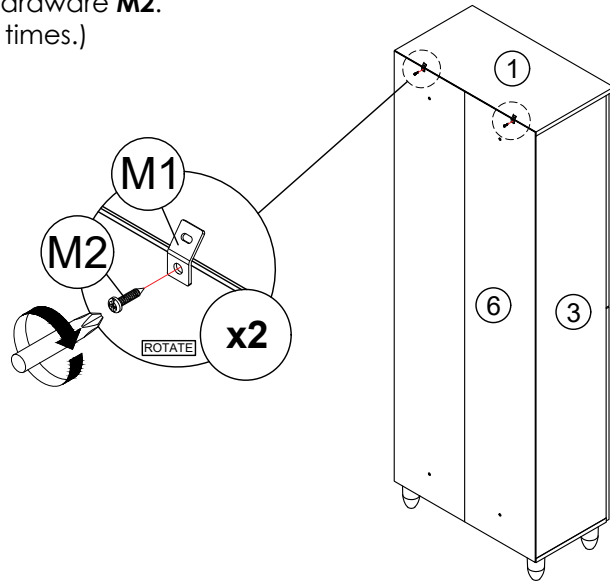


STEP 14

- Mark and use the power drill to drill a hole on the wall.
- Hit hardware **M3** into the wall.
(Repeat 2 times.)

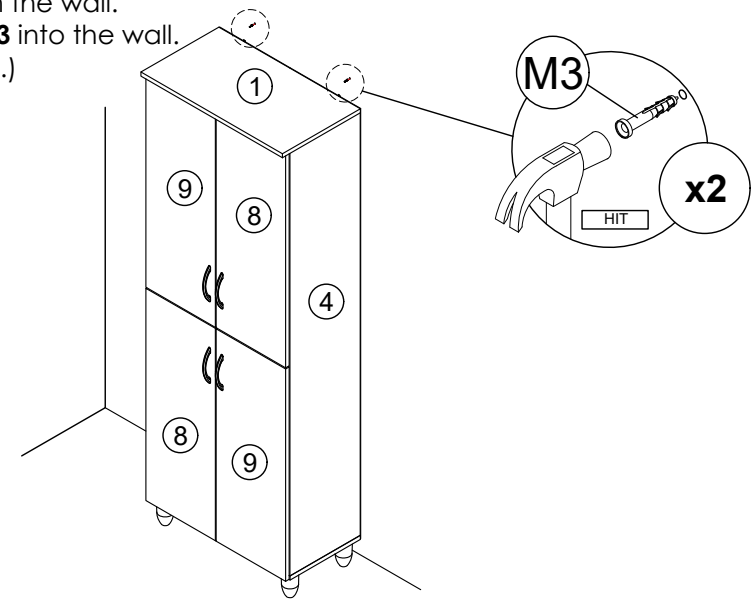

STEP 15

- Assemble hardware **M1** to **M3** by using hardware **M4**.
(Repeat 2 times.)

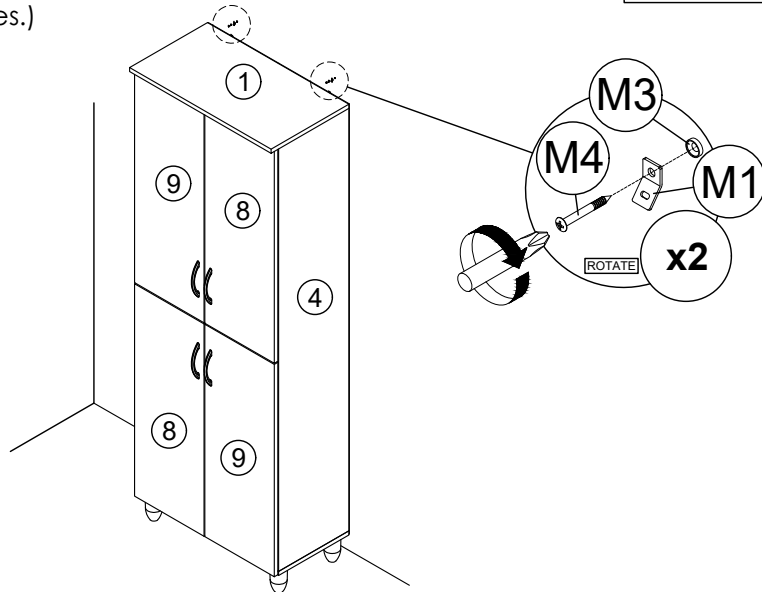

STEP 16

- Connect two of the hardware **M1** by using hardware **M5**.
- Tighten the hardware **M5**.
(Repeat 2 times.)

