


#### Features

- *ExoCrylic™*
- *Drop-in or three-wall alcove*
- *UL listed*
- *Pump with air switch and grounding-type plug-in cord*
- *Optional K-1283 removable apron*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *Molded lumbar support and armrests for comfort*
- *72" (1829 mm) x 42" (1067 mm) x 20-1/8" (511 mm)*

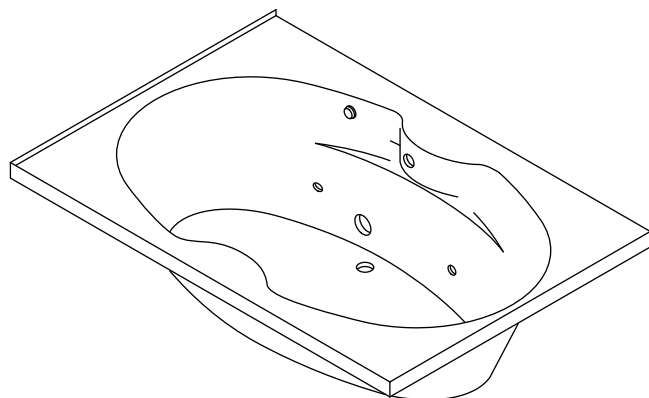

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Colors/Finishes	
K-1131	Bath whirlpool – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1131-F	Bath whirlpool – tile-in flange (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
<b>Optional Accessories</b>			
K-1283	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1491	Removable bath pillow (cont.)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Product Specification

The ExoCrylic whirlpool bath shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 20-1/8" (511 mm) in height. Whirlpool shall be for drop-in [K-1131] or three-wall alcove [K-1131-F] installations. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, and pump with air switch and grounding-type plug-in cord. Whirlpool shall have molded lumbar support and armrests for comfort. Whirlpool shall be UL listed. Whirlpool shall feature optional K-1283 removable apron and K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1131-\_\_\_\_ or K-1131-F-\_\_\_\_.

# PROFLEX® 7242

## (cont.) Optional Accessories

K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
--------	-------------------------------	-----------------------------	-----------------------------	-------------------------------------

## Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	53" (1346 mm) x 26" (660 mm)		
Basin area, top	65" (1651 mm) x 34" (864 mm)		
Weight	70 lbs (31.8 kg)		
To overflow:			
Water depth	15" (381 mm)		
Capacity	78 gal (295.3 L)		
* Approximate measurements for comparison only.			
Drop-in cutout	70-1/2" (1791 mm) x 40-1/2" (1029 mm)		
Pump:	V	Hz	A
1-speed	120	60	7.5

## Required Electrical Service

Dedicated circuit protected with a Class A Ground-Fault Circuit-Interrupter (GFCI) is required:

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (164 kg/square meter) floor loading.

The apron must be installed before the finished floor and wall materials.

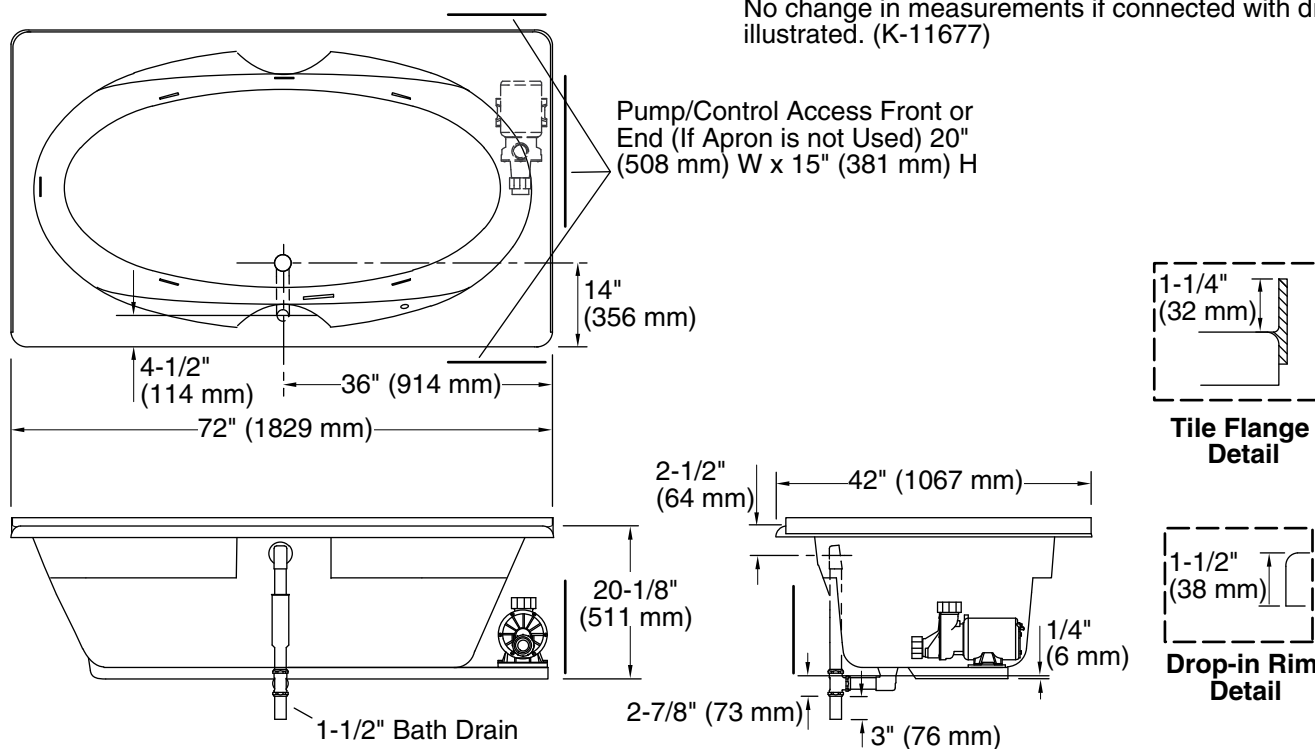

## Product Diagram